






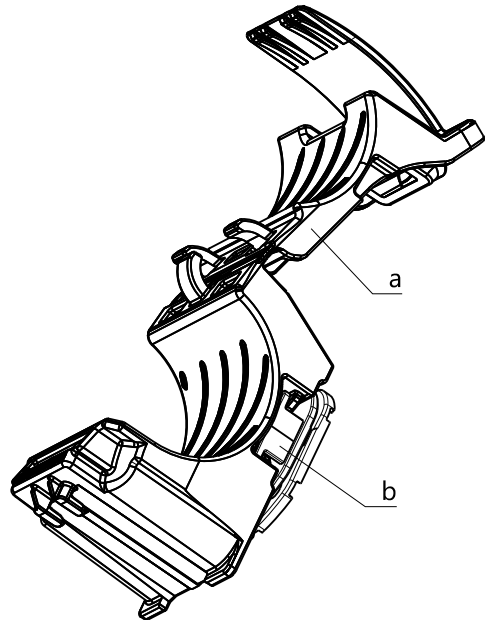


Installation Condition/
Einbauzustand
1:1


Minimum Bundle Ø/
Minimum Buendel Ø

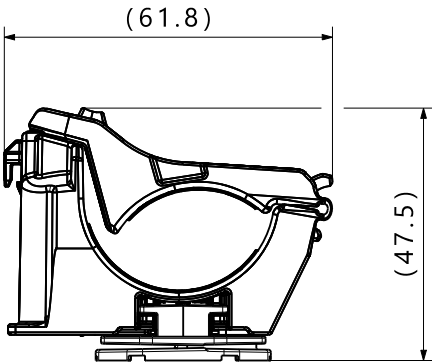

Maximum Bundle Ø/
Maximum Buendel Ø

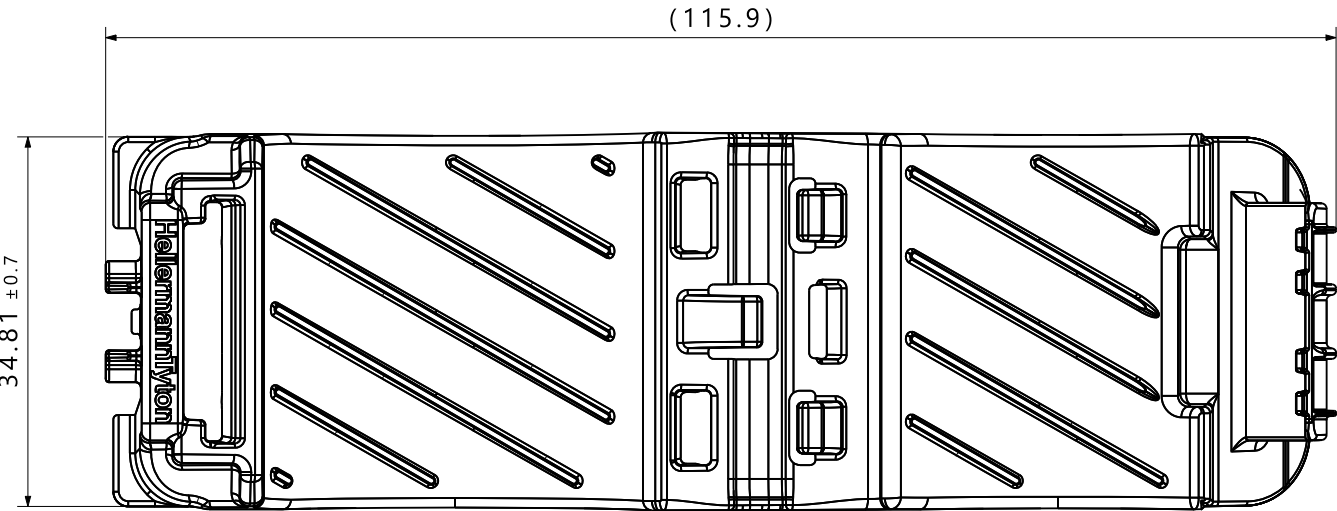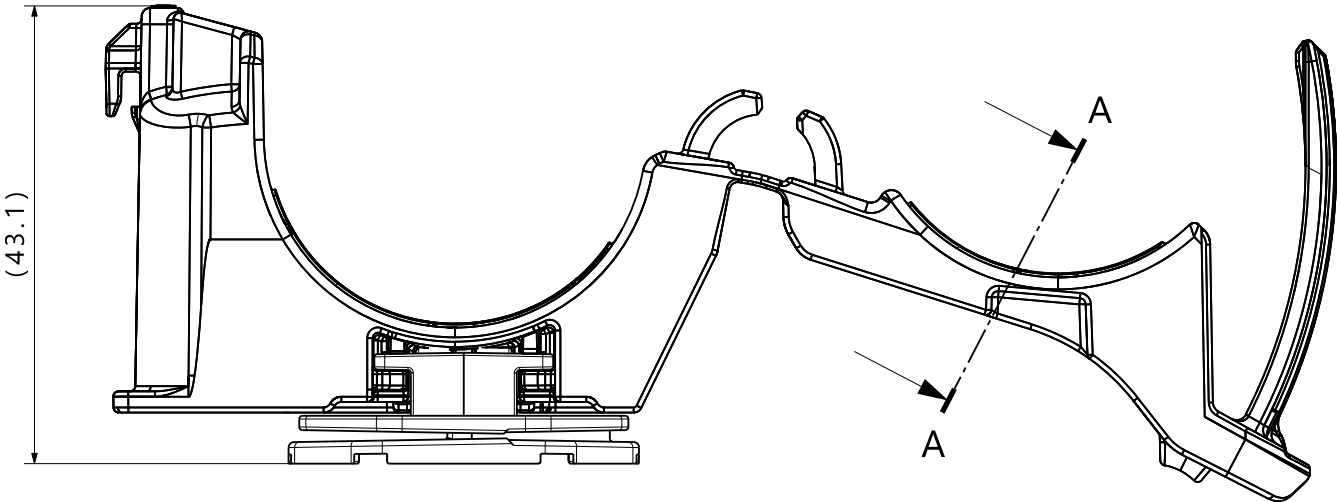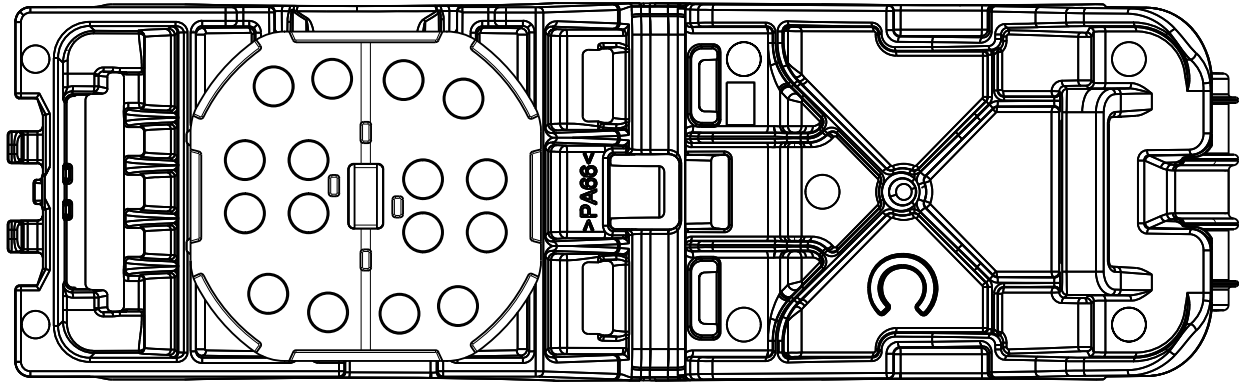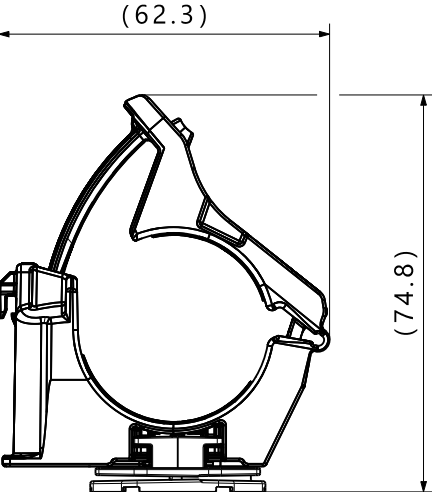

A-A

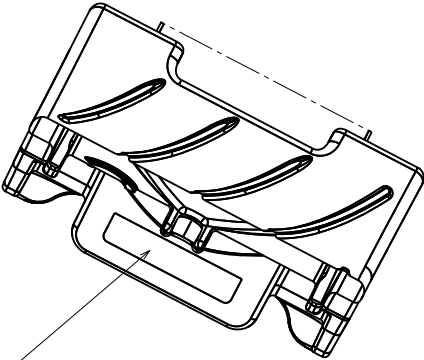

Saddle opening accommodates ties
up to 13,2 mm wide and 2,1 mm thick/
Die Sattelöffnung nimmt Kabelbinder
bis zu einer Breite von 13,2 mm und
einer Dicke von 2,1 mm auf

Specification:

- Material: a:
PA6.6
heatstabilized
impact modified
b:
PA666
- Material color: a:
black
b:
black
- Bundle Ø: 19,4 - 36 mm
- Weight: ~ 29,5 g

Spezifikation:

- Material: a:
PA6.6
hitze stabilisiert,
schlagzäh modifiziert
b:
PA666
- Material Farbe: a:
schwarz
b:
schwarz
- Buendel Ø: 19,4 - 36 mm
- Gewicht: ~ 29,5 g

The manufacturing-related geometry
changes (injection point,
ejectors marks, etc.) allowed.
Design of the details are left to
suppliers discretion.

Durch das Herstellverfahren bedingte
Geometrieänderungen (Anspritzung,
Auswerfermarkierungen, etc.) zulässig.
Einzelheiten der Ausführung bleiben
dem Hersteller ueberlassen.

Printed copy for information only/
Ausdruck nur zur Information

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Title		Scale	
Drawing	State	Part	All drawing revisions are stored in CAD PDM database			A.Hiller	2024/11/20	IRCCPMB6CC	Global Project Number 23-2532	2:1	
00.4	Design Release	00				Approved	Date (YYYY/MM/DD)				
Changed	Date (YYYY/MM/DD)					C.Cordts	2024/11/20				
Approved	Date (YYYY/MM/DD)					Units mm	HellermannTyton www.HellermannTyton.com		Drawing-No 23-2532-001-CSG	Format A2	Sheet 1 / 1