
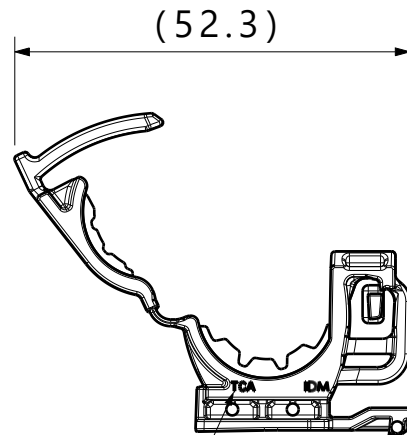
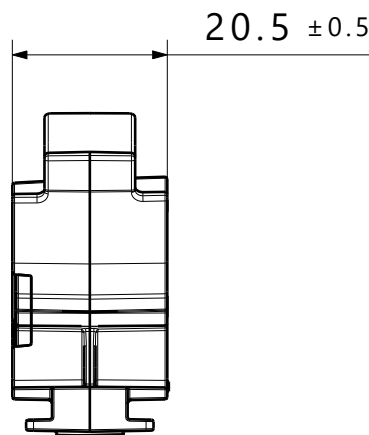
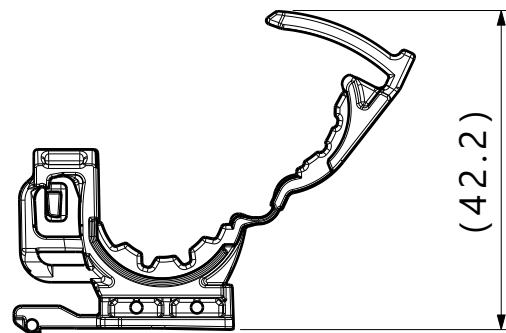
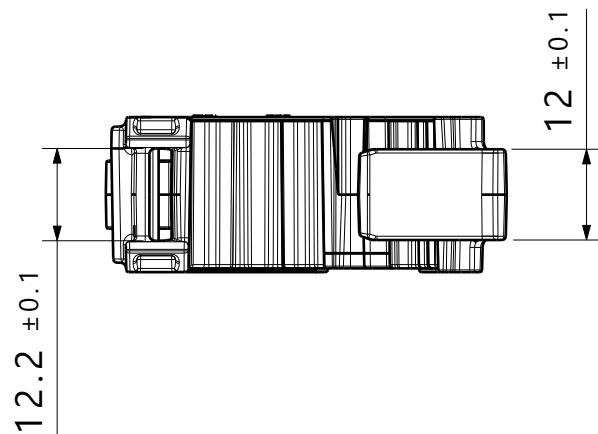
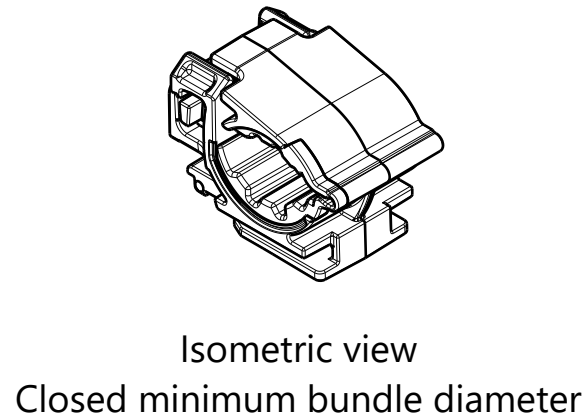
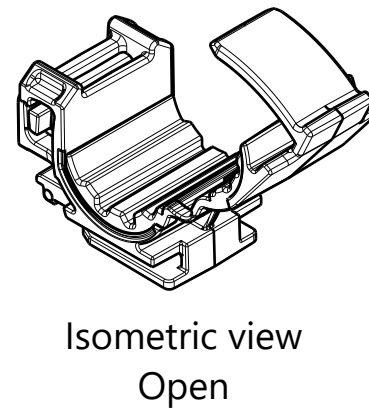
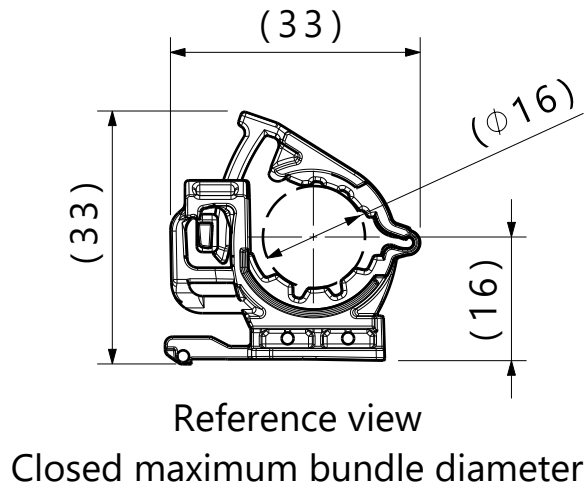


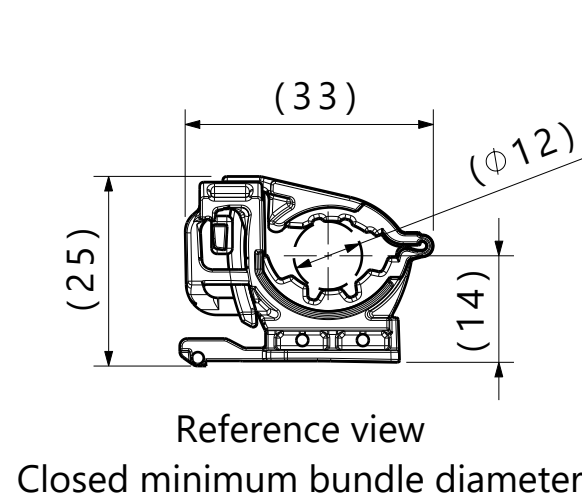

- Reference:
- Performance requirements at dry as molded:
- Connector clip performance per SAE/USCAR-44:
 - Connector clip push on force: 60 newtons max
 - Connector clip pull off force: 165 newtons min
 - Connector clip 90° pull off force: 110 newtons min

- Notes:
- Material: See chart
 - Material color: See chart
 - Maximum percent regrind permissible: 25% for PA66 only
 - Max allowable flash to be: 0.5mm
 - Max allowable mismatch to be: 0.1mm
 - Fits into USCAR clip slot specification EWCAP-005-17.

'TCA', cavity ID, and country of origin
to be shown on this surface

Global Part Description	Material	Color
SGROC12-16CLIP17-PA66HIRHSUV/TPE-BK	PA66HIRHSUV	Black
	TPE	

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title Overmold Ratchet O-Clamp, 12-16mm, with 17mm connector clip		Scale
Drawing	State	Part					ECN 311240	Russell			2024/07/30
00.1	Design Release	-		All drawing revisions are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com	Date (YYYY/MM/DD) 2024/07/30		Drawing-No 23-2634-001-CSU	Global Project Number	
Changed		Date (YYYY/MM/DD)								23-2634	
Russell		2024/07/30								Format	
Approved		Date (YYYY/MM/DD)								A3	
Karabon		2024/07/30							Sheet	1 / 1	

HellermannTyton
www.HellermannTyton.com