
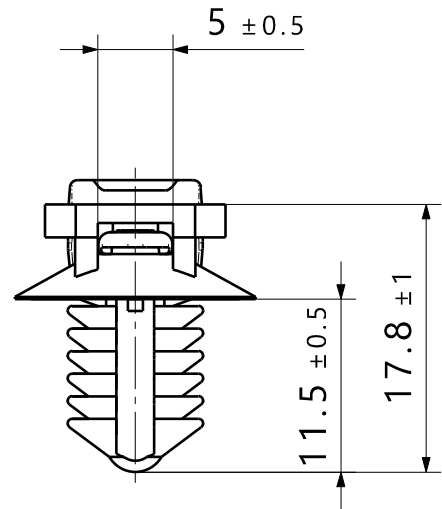
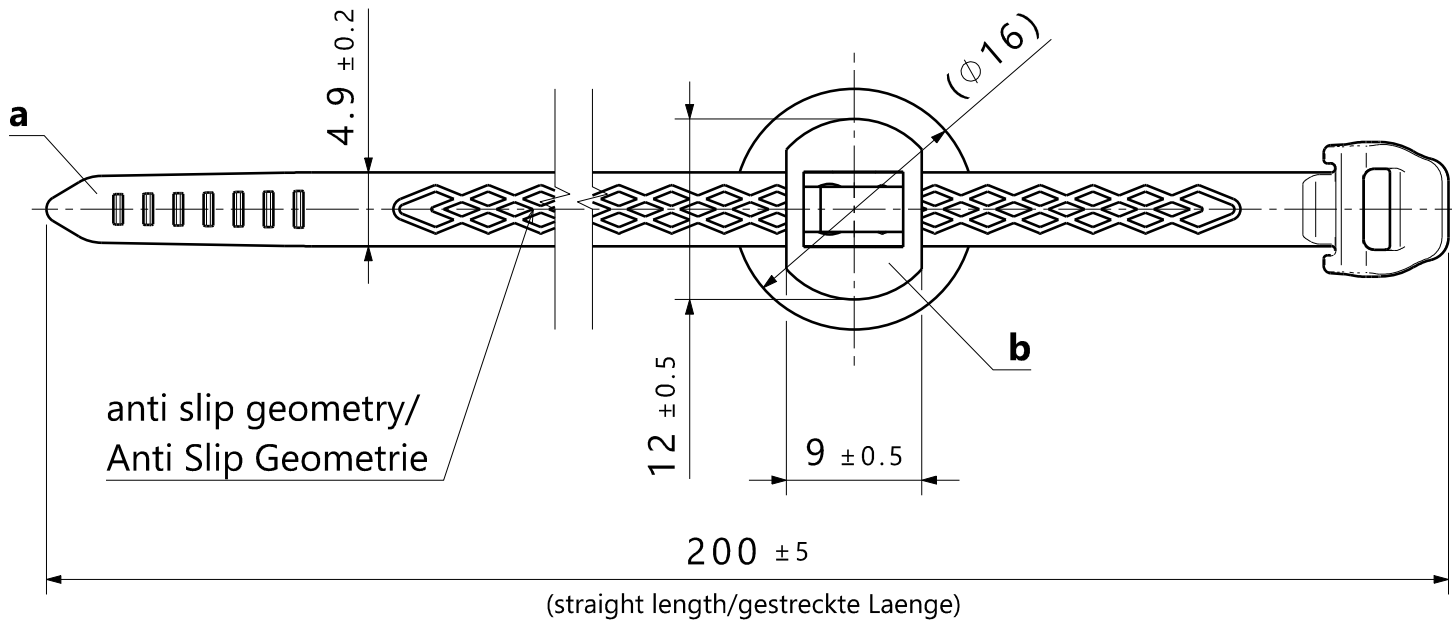


1:1

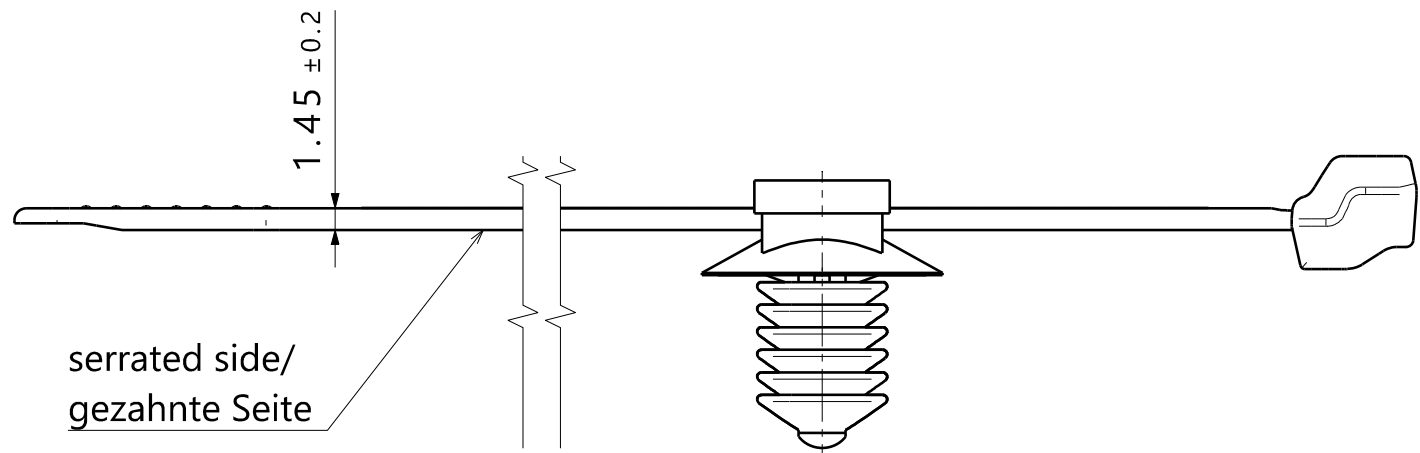

Printed copy for information only/
Ausdruck nur zur Information

Specification:
- Performance requirements at
equilibrium condition
standard atmosphere 23 °C / 50% RH

- Material: a: PP copolymer
b: PA6.6
heatstabilized
- Material color: a: black
b: black

- Bundle Ø: 4 - 45 mm
- Tensile force: 185 N

- Hole size: 7,7 - 8,0 mm
- Panel thickness: 0,8 - 6,0 mm

Application with HellermannTyton
handtool EVO7:
- recommendation: SET4,5 (~95 N)
- max. setting: SET5,5 (~115 N)

The manufacturing-related geometry
changes (injection point,
ejectors marks, etc.) allowed.
Design of the details are left to
suppliers discretion.

Spezifikation:
- Leistungsanforderung im
Gleichgewichtszustand
Normalklima 23 °C / 50% RH

- Material: a: PP Copolymer
b: PA6.6
hitzestabilisiert
- Material Farbe: a: schwarz
b: schwarz

- Buendel Ø: 4 - 45 mm
- Schlaufenhaltekraft: 185 N

- Loch Ø: 7,7 - 8,0 mm
- Blechdicke: 0,8 - 6,0 mm

Anwendung mit dem HellermannTyton
Verarbeitungswerkzeug EVO7:
- Empfehlung: SET4,5 (~95 N)
- max. Einstellung: SET5,5 (~115 N)

Durch das Herstellverfahren bedingte
Geometrieaenderungen (Anspritzung,
Auswerfermarkierungen, etc.) zulaessig.
Einzelheiten der Ausfuehrung bleiben
dem Hersteller ueberlassen.

Revision Level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title									
Drawing	State	Part						A.Hiller	2024/06/12				Scale	2:1					
00.3	Design Release							Approved	Date (YYYY/MM/DD)	S50ROSFT8		Global Project Number							
Changed	Date (YYYY/MM/DD)							S.Maschmann	2024/06/17			24-0457							
Approved			Date (YYYY/MM/DD)			All drawing revisions are stored in CAD PDM database	Units mm	 www.HellermannTyton.com		Drawing-No 24-0457-001-CSG		Format	A2						
												Sheet	1 / 1						

Semi-finished part/ Halbfabrikat	Project no./ Projektnr.	
	a	b
S50OS	GPN 18-0147	GPN 09-0387
FT8		

Product type/ Artikelbezeichnung	Project no./ Projektnr.		
S50ROSFT8	GPN 24-0457	X	X