

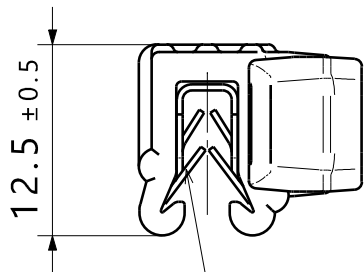


1:1

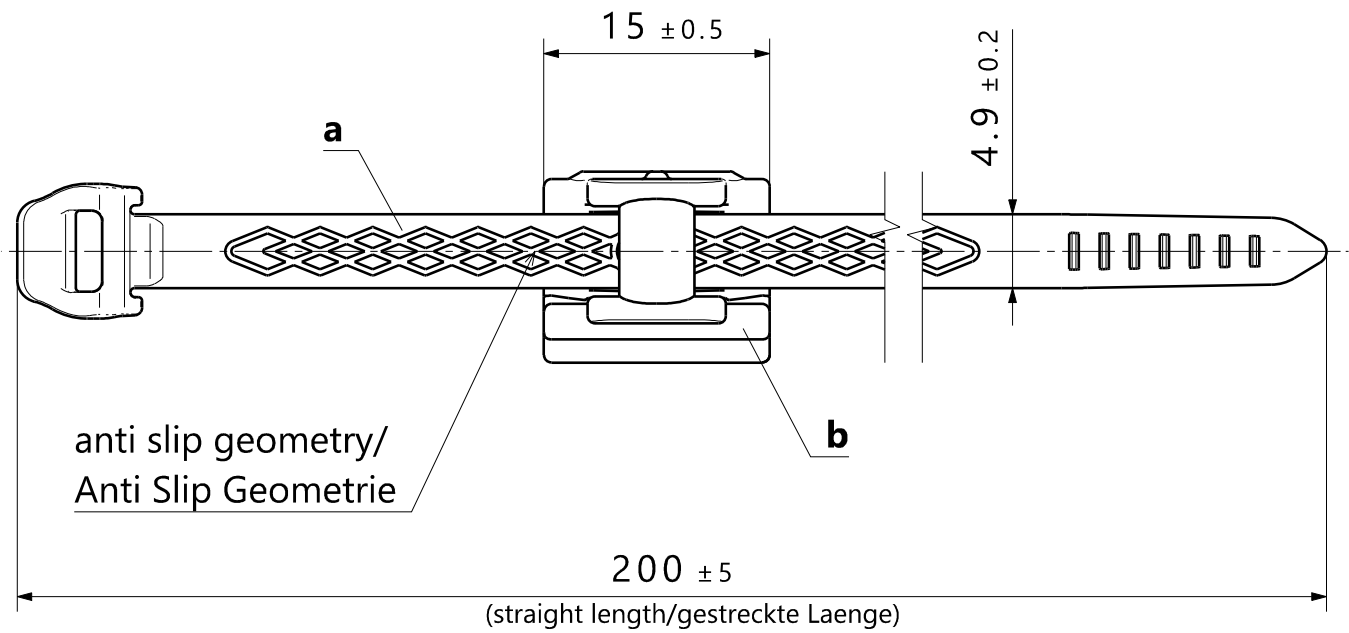

Clamp TE4-511-000-K
fit to material thickness 1-3 mm/
Blechklammer TE4-511-000-K
passend fuer Materialdicke 1-3 mm

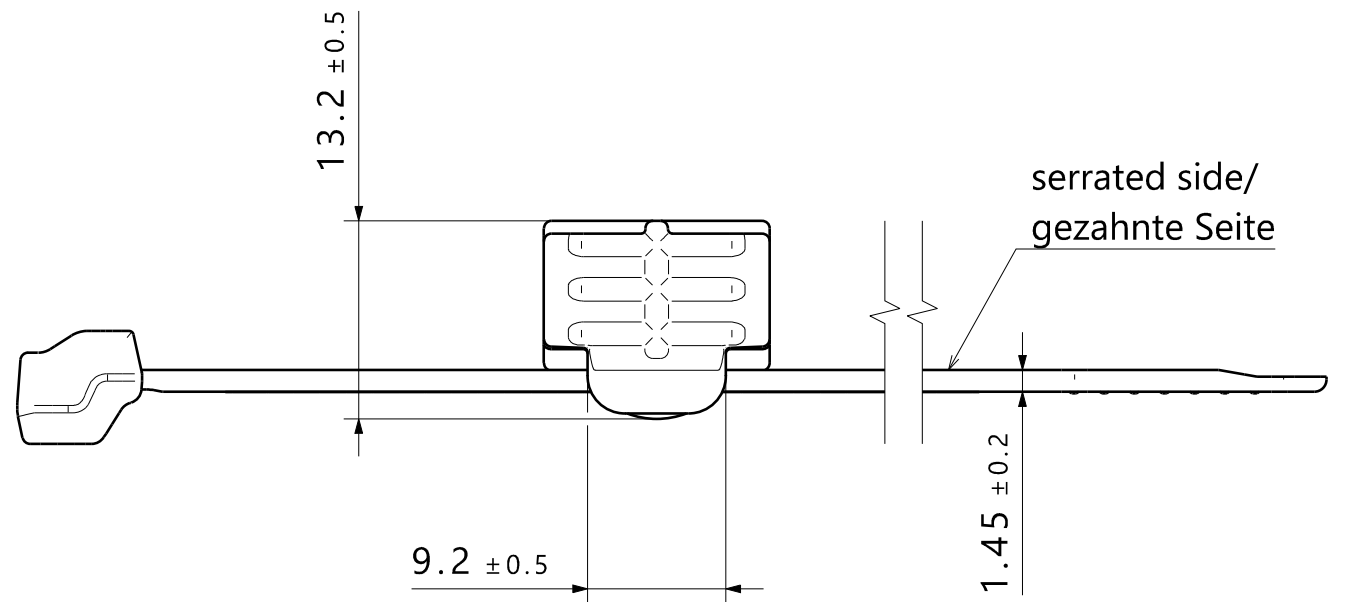

Printed copy for information only/
Ausdruck nur zur Information

Specification:		Spezifikation:	
- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH		- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH	
- Material:	a: PP copolymer b: PA6.6 heatstabilized impact modified	- Material:	a: PP Copolymer b: PA6.6 hitzestabilisiert, schlagzaeh modifiziert
- Material color:	a: black b: black	- Material Farbe:	a: schwarz b: schwarz
- Bundle Ø:	1 - 45 mm	- Buendel Ø:	1 - 45 mm
- Tensile force:	185 N	- Schlaufenhaltekraft:	185 N
- Panel thickness:	1 - 3 mm	- Blechdicke:	1 - 3 mm

Application with HellermannTyton handtool EVO7:		Anwendung mit dem HellermannTyton Verarbeitungswerkzeug EVO7:	
- recommendation:	SET4,5 (~95 N)	- Empfehlung:	SET4,5 (~95 N)
- max. setting:	SET5,5 (~115 N)	- max. Einstellung:	SET5,5 (~115 N)

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level			Revision Record			Drawn		Date (YYYY/MM/DD)	Title		Scale	
Drawing	State	Part	The copyright of this drawing is reserved by HellermannTyton.			A.Hiller	2024/06/11	2:1			Global Project Number	
00.3	Design Release					Approved	Date (YYYY/MM/DD)					
Changed	Date (YYYY/MM/DD)					S.Maschmann	2024/06/17	S50ROSEC22		Format	A2	
Approved	Date (YYYY/MM/DD)		All drawing revisions are stored in CAD PDM database	Units		Drawing-No		Sheet				
XXX				mm		24-0458-001-CSG		1 / 1				