
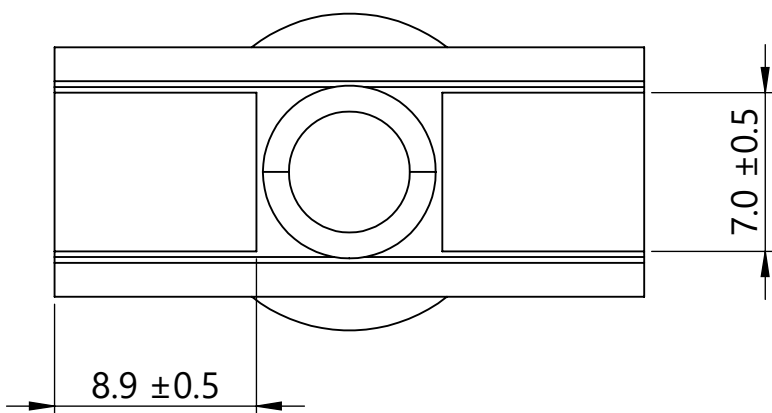
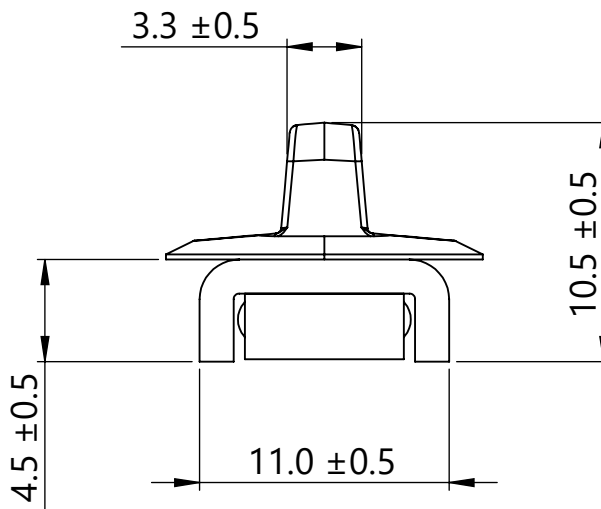



Isometric View
Scale 2 : 1

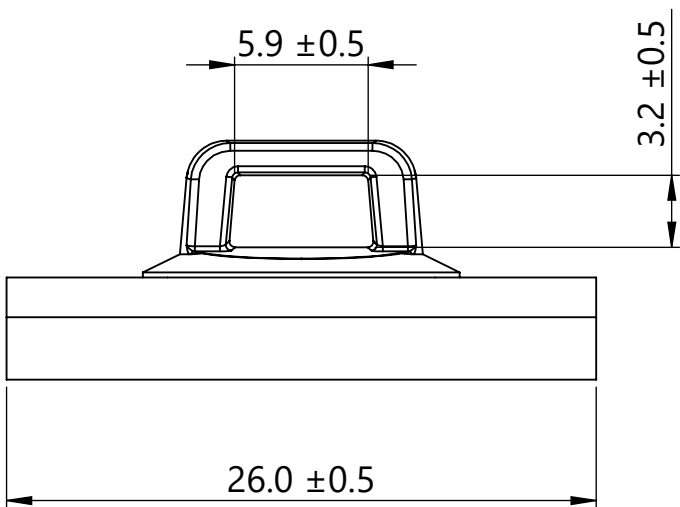

- Reference:
1. Material: See chart
 2. Material color: See chart
 3. Min. Mechanical Tensile Strength: 66.7N (15 lbf)
 4. Maximum percent regrind permissible: 10%
 5. Maximum allowable flash to be: 0.25mm
 6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages
 7. Listed pull force values are based on magnet strength only. Assembled product performance will vary based on application and surface type. Please test application to determine best product fit

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGCTM20P-NDFEB45/POM/ST-BK	1	1	POM	-	Black
	2	1	NdFeB N45M	NiCuNi	Silver
			Steel	Zinc	Silver

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)						
Drawing	State		Part	ECN 311050 - Initial Release				Johnson		2024/05/01		TitleMagnetic Cable Tie Pipe Mount, 15 lb		Scale3:1		
00.0	Design Release		-					Approved		Date (YYYY/MM/DD)				Global Project Number24-0530		
Changed		Date (YYYY/MM/DD)						Uhler		2024/05/20		Drawing-No24-0530-001-CSU		FormatA3		
Johnson		2024/05/01				Unitsmm		HellermannTyton www.HellermannTyton.com		Sheet1/1						
Approved		Date (YYYY/MM/DD)														
Uhler		2024/05/20														