

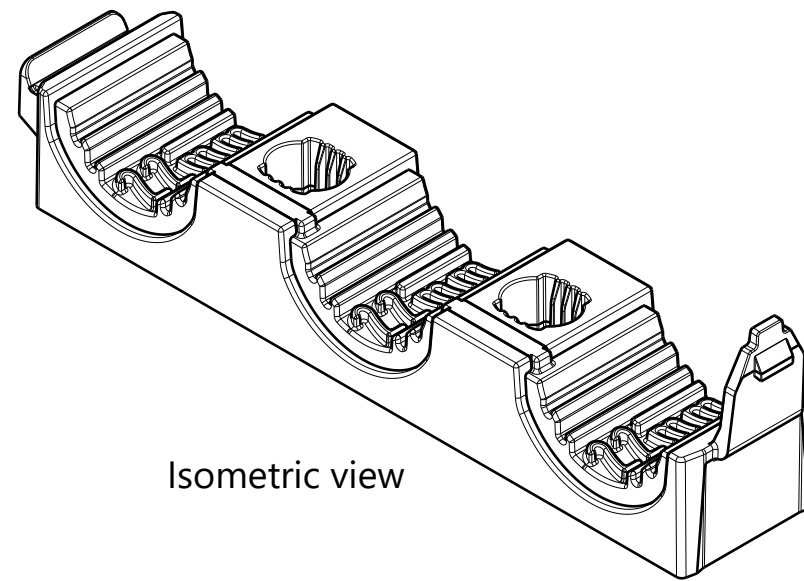
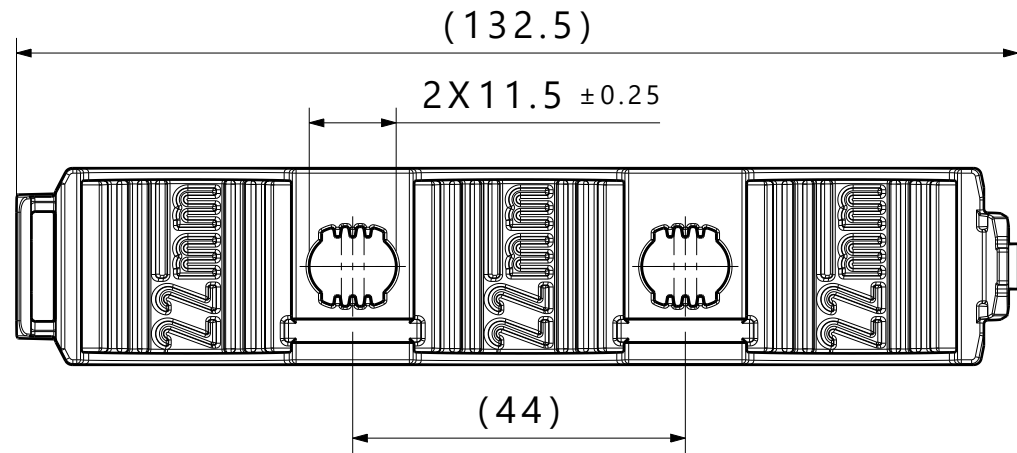
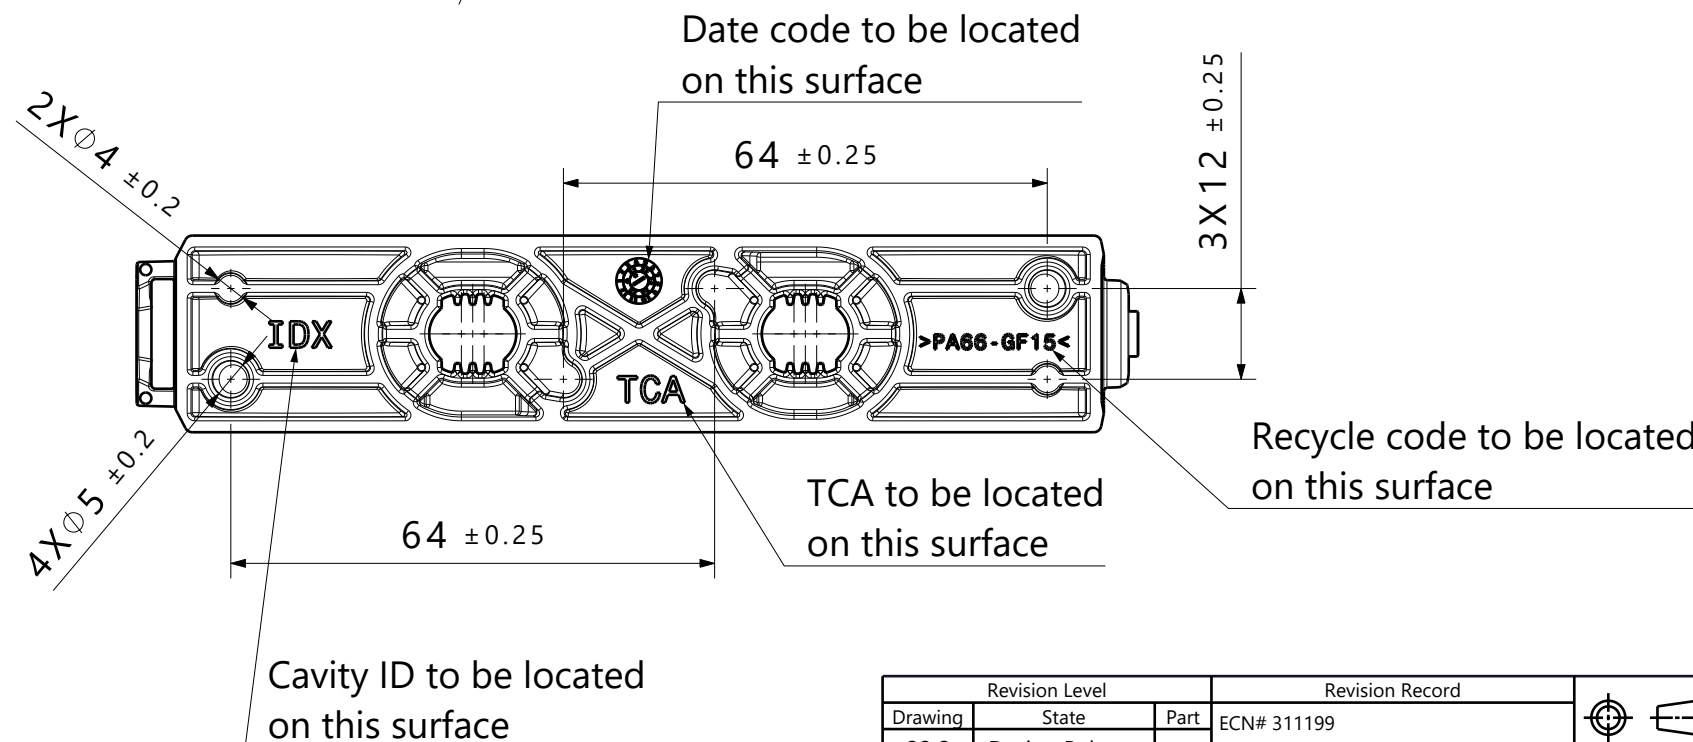


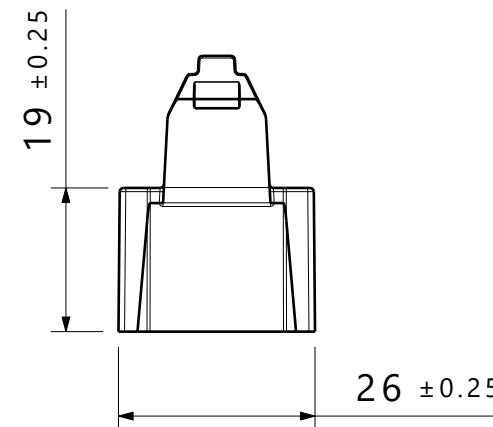

Isometric view

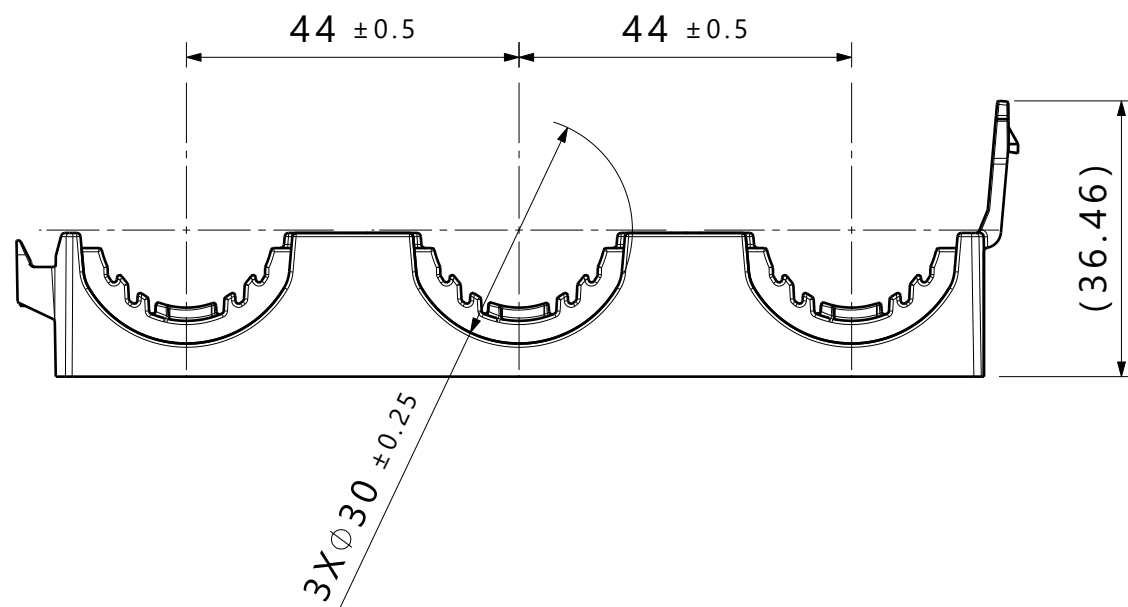

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 0%
 - 4. Max allowable flash to be: 0.5mm
 - 5. Max allowable mismatch to be: 0.1mm
 - 6. Applicable stud size:
 - A. M8 x 1.25
 - 7. Two HDC22X3BASE clamp halves are required for a functional clamp assembly

Global Part Description	Material	Color
HDC22X3BASE-PA66GF15/TPE-BK	PA66-GF15/TPE	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title		Scale
Drawing	State	Part	ECN# 311199				Van Hulst	2024/05/31			
00.0	Design Release	-	 All drawing revisions are stored in CAD PDM database				Approved	Date (YYYY/MM/DD)	Triple clamp - 22mm	Global Project Number 24-0695	
Changed	Date (YYYY/MM/DD)						Rohde	2024/06/04			
Van Hulst	2024/05/31										
Approved	Date (YYYY/MM/DD)		Units mm HellermannTyton www.HellermannTyton.com		Drawing-No 24-0695-001-CSU	Format	A3				
Rohde	2024/06/04					Sheet	1 / 1				