

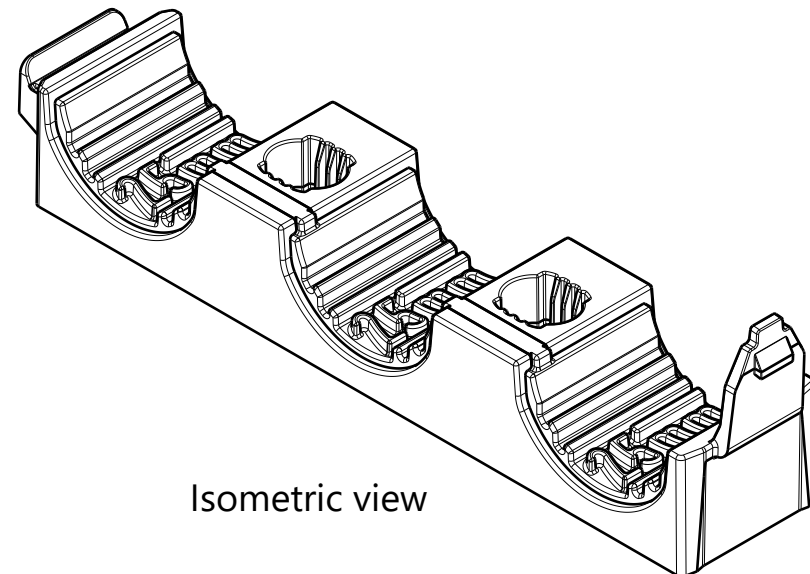
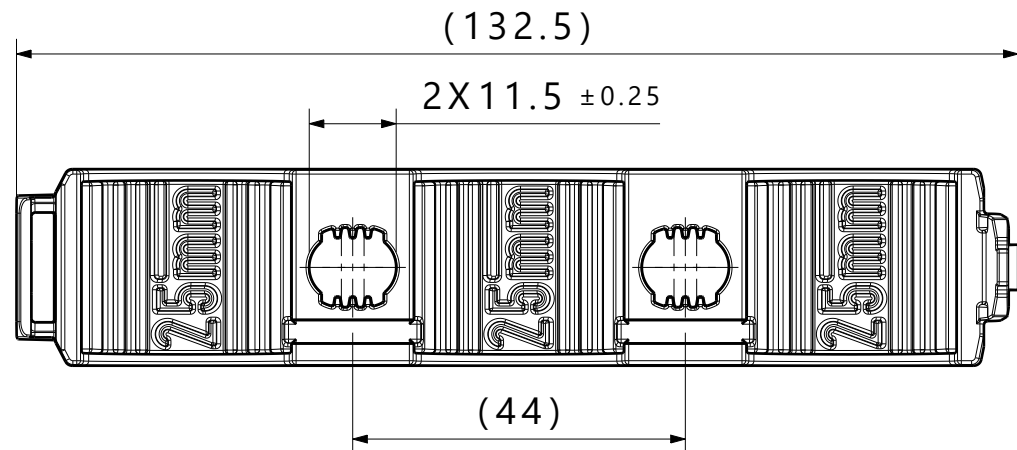
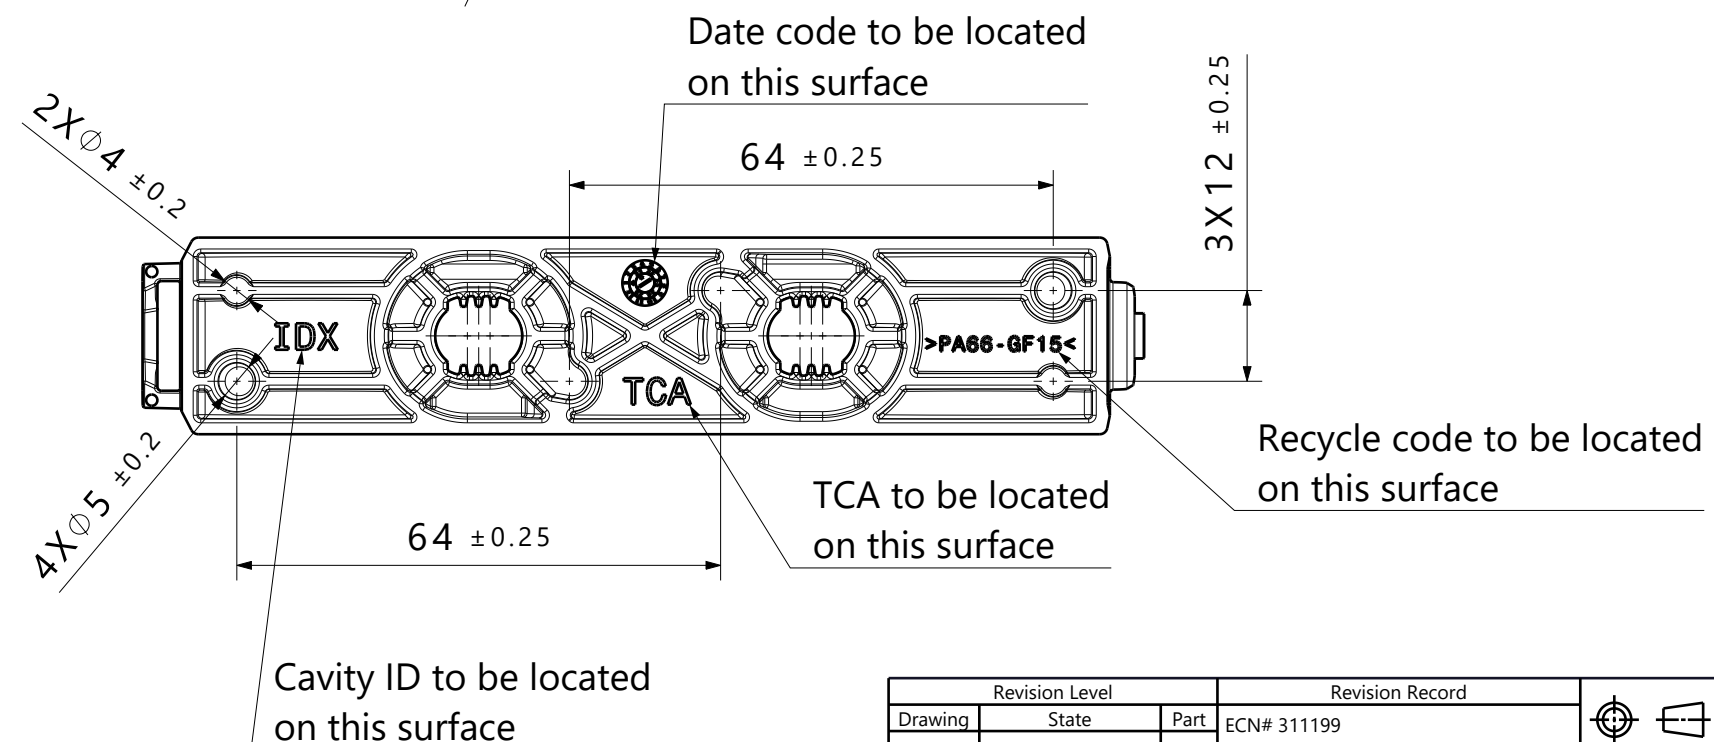


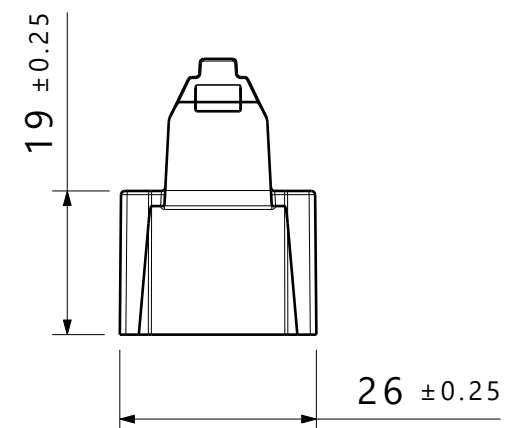

Isometric view

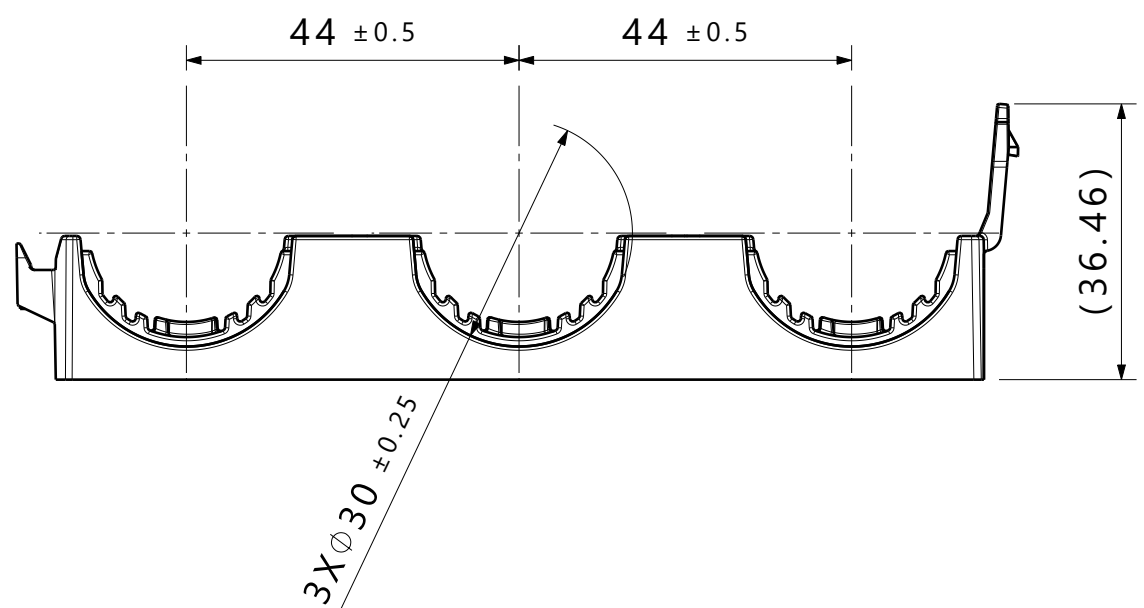

- Notes:
1. Material: See chart
 2. Material color: See chart
 3. Maximum percent regrind permissible: 0%
 4. Max allowable flash to be: 0.5mm
 5. Max allowable mismatch to be: 0.1mm
 6. Applicable stud size:
A. M8 x 1.25
 7. Two HDC25X3BASE clamp halves are required for a functional clamp assembly

Global Part Description	Material	Color
HDC25X3BASE-PA66GF15/TPE-BK	PA66-GF15/TPE	Black

Revision Level			Revision Record			Drawn		Date (YYYY/MM/DD)	Title Triple clamp - 25mm		Scale 1:1	
Drawing	State	Part	ECN# 311199			Van Hulst		2024/05/31 <td colspan="2">Global Project Number 24-0696</td>			Global Project Number 24-0696	
00.0	Design Release	-			Approved		Date (YYYY/MM/DD)	Drawing-No 24-0696-001-CSU		Format A3		
Changed		Date (YYYY/MM/DD)			Rohde		2024/06/04			Sheet 1 / 1		
Van Hulst		2024/05/31										
Approved		Date (YYYY/MM/DD)										
Rohde		2024/06/04										



The copyright of this drawing is reserved by HellermannTyton.

Units
mm
HellermannTyton
www.HellermannTyton.com

Triple clamp - 25mm
Drawing-No
24-0696-001-CSU
Scale
1:1
Global Project Number
24-0696
Format
A3
Sheet
1 / 1