


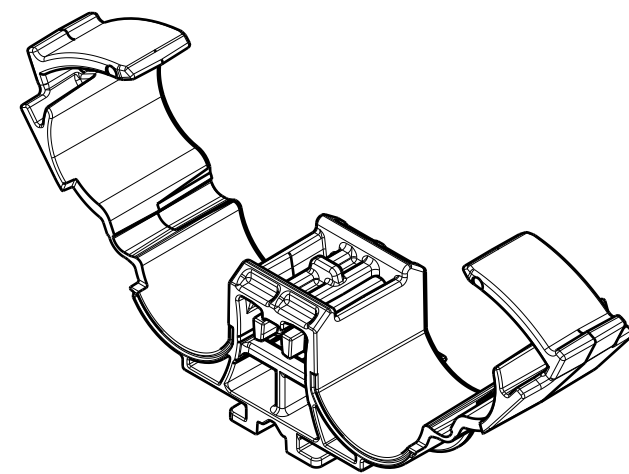
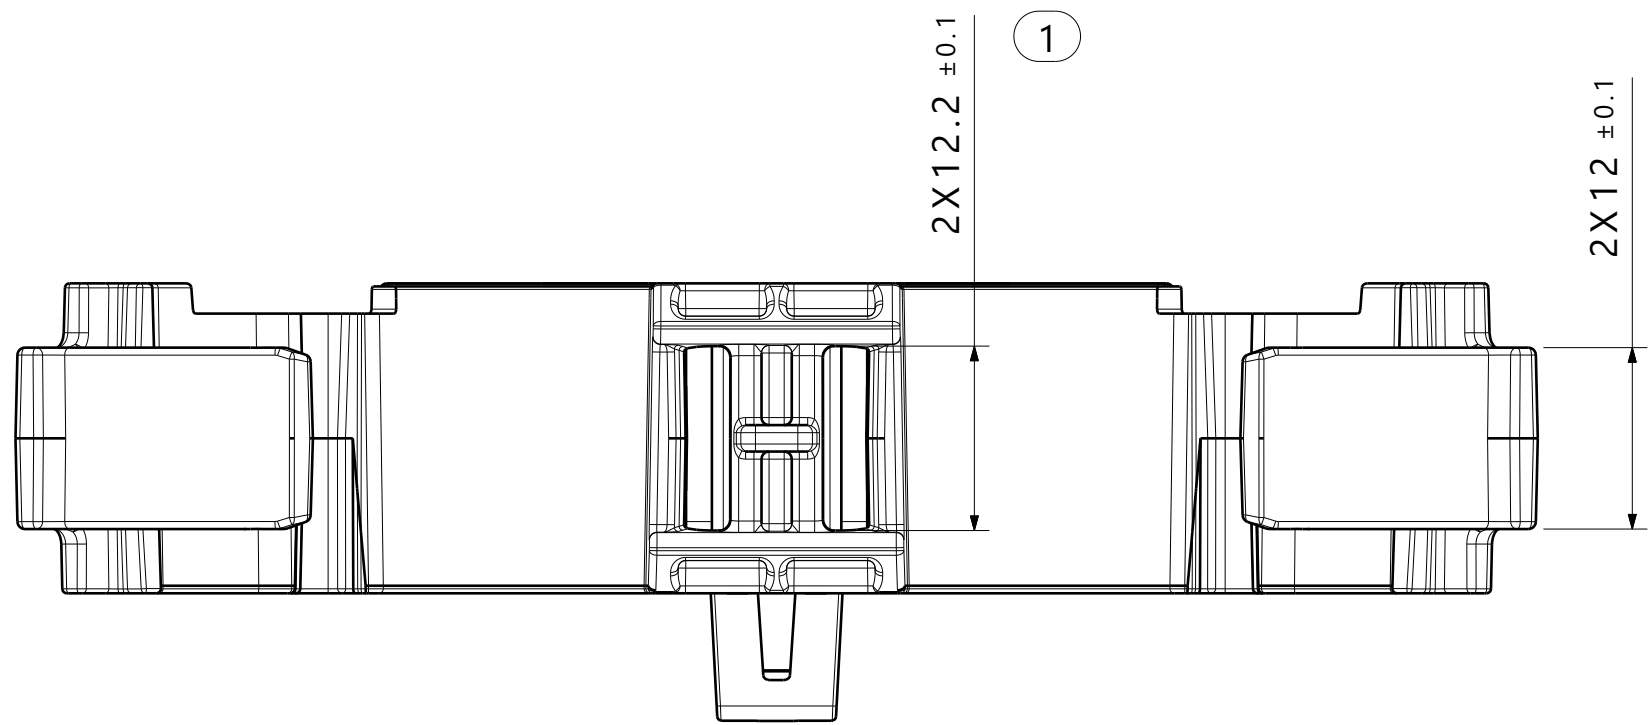
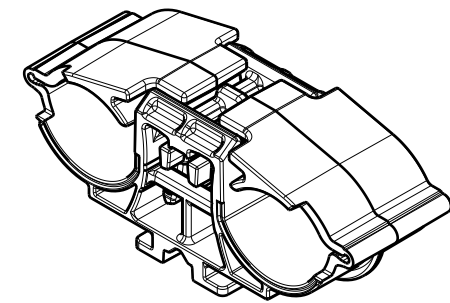
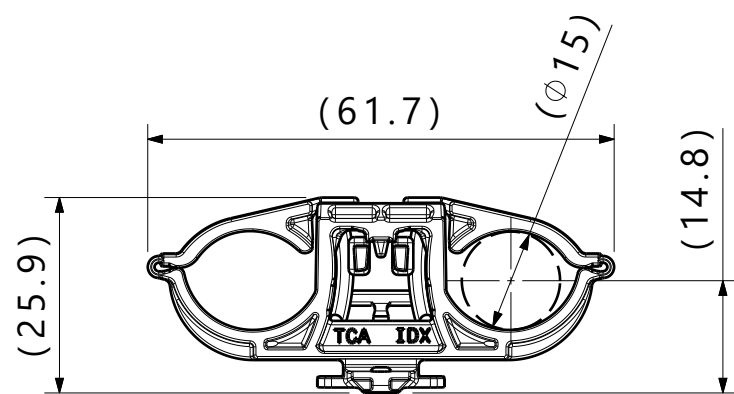


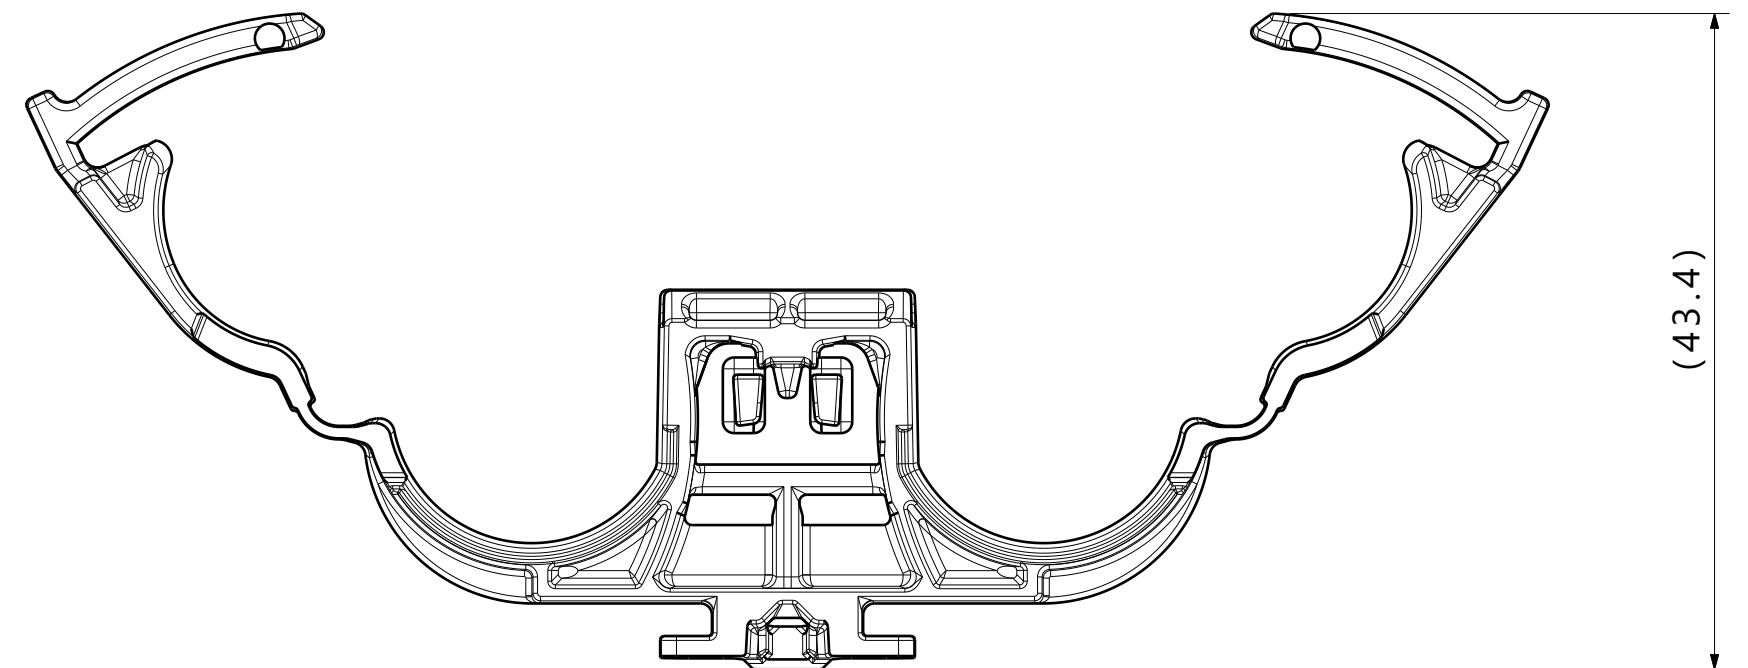


Isometric view
Open
Scale 1:1

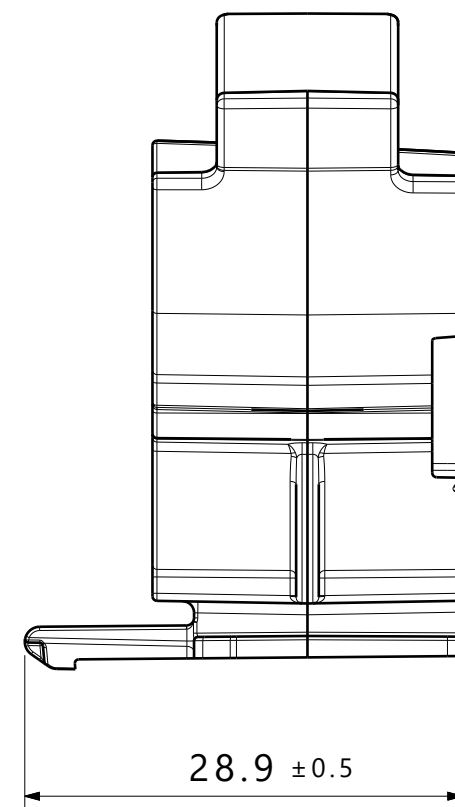

Isometric view
Closed minimum bundle diameter
Scale 1:1

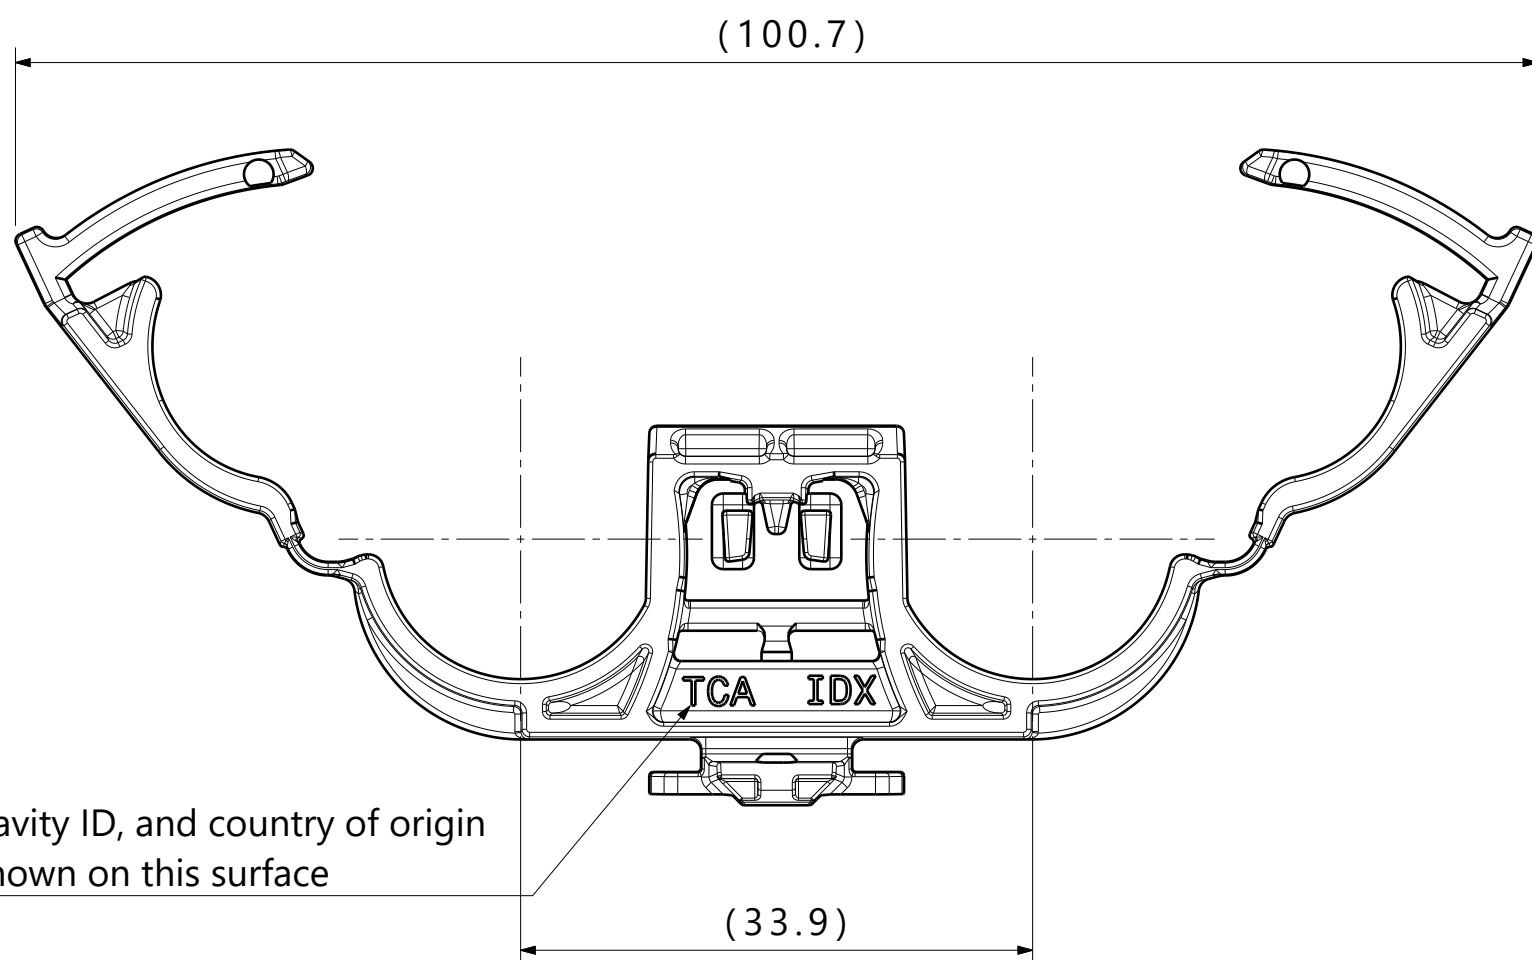

Reference view
Closed minimum bundle diameter
Scale 1:1


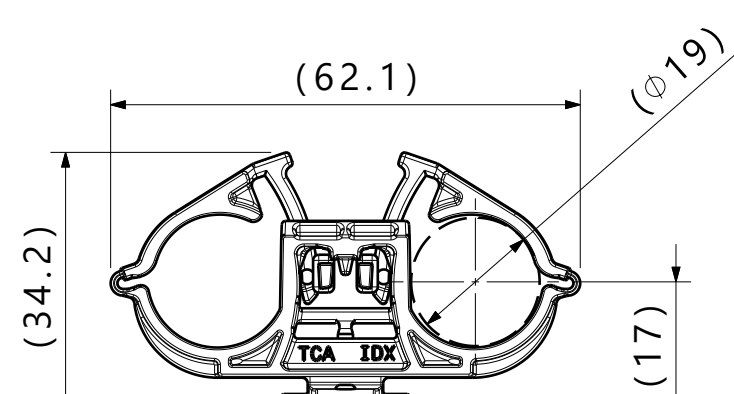


Reference view
Closed maximum bundle diameter
Scale 1:1

- Performance requirements at dry as molded:
- Connector clip performance per SAE/USCAR-44:
 - Connector clip push on force: 60 newtons max
 - Connector clip pull off force: 165 newtons min
 - Connector clip 90° pull off force: 110 newtons min

- Notes:
- Material: See chart
 - Material color: See chart
 - Maximum percent regrind permissible: 25%
 - Max allowable flash to be: 0.5mm
 - Max allowable mismatch to be: 0.1mm
 - A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - Total number of inspections required: 3
 - Last number used: 3
 - Missing symbols: -
 - Fits into USCAR clip slot specification EWCAP-005-17.

Global Part Description			Material	Color
DROC15-19CLIP17-PA66HIRHSUV-BK			PA66HIRHSUV	Black

Revision Level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.	Drawn	Date (YYYY/MM/DD)	Title Dual Ratchet O-Clamp size A with 17mm connector clip		Scale 2:1		
Drawing	State	Part	ECN 311921				Karabon	2025/02/28			Global Project Number 24-0997		
00.2	Design Release	-					Approved	Date (YYYY/MM/DD)			Format A2		
Changed	Date (YYYY/MM/DD)						Van Hulst	2025/02/28			Sheet 1 / 1		
Karabon	2025/02/28					All drawing revisions are stored in CAD PDM database	Units mm	HellermannTyton www.HellermannTyton.com		Drawing-No 24-0997-001-CSU			
Approved	Date (YYYY/MM/DD)												
Van Hulst	2025/02/28												