




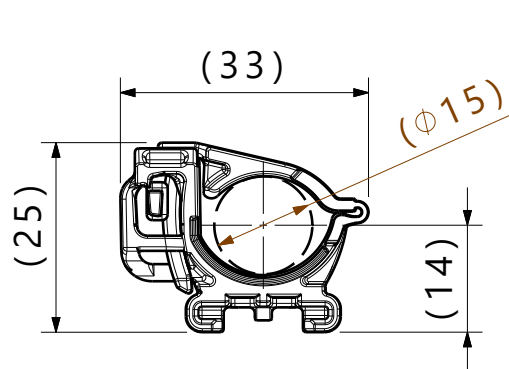


Reference view
Closed minimum bundle diameter

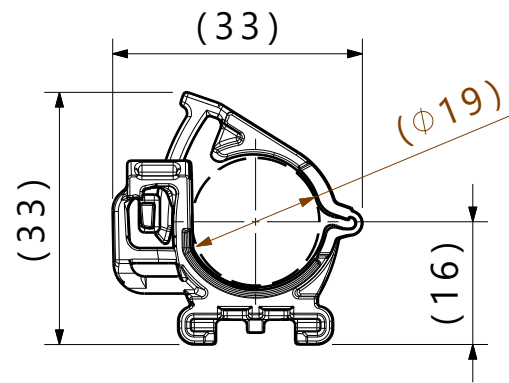





Reference view
Closed maximum bundle diameter

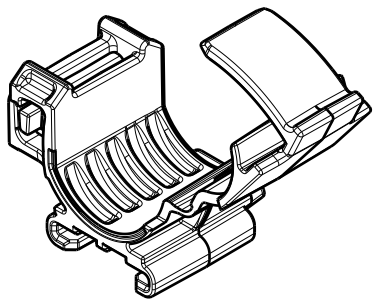

Isometric view
Open

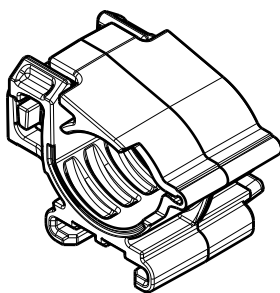

Isometric view
Closed minimum bundle diameter

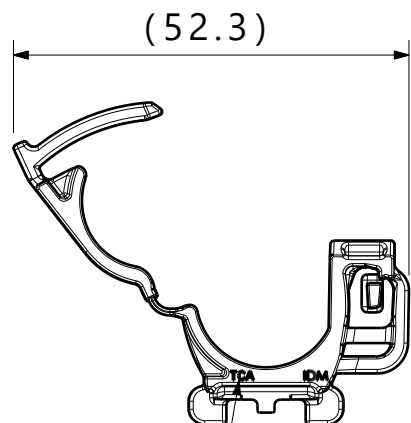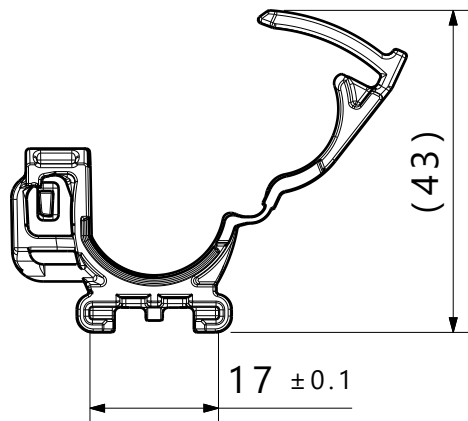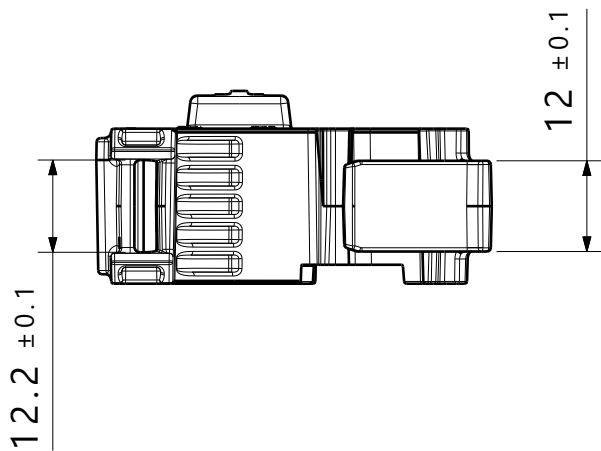

'TCA', cavity ID and country of origin
to be shown on this surface

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible: 25%
 - 4. Max allowable flash to be: 0.5mm
 - 5. Max allowable mismatch to be: 0.1mm

Revision Level			Revision Record	
Drawing	State	Part	ECN 311893	
00.1	Design Release	-		
Changed	Date (YYYY/MM/DD)			
Karabon	2025/02/01			
Approved	Date (YYYY/MM/DD)			
Van Hulst	2025/02/01			

Revision Level			Revision Record	
Drawing	State	Part	ECN 311893	
00.1	Design Release	-		
Changed	Date (YYYY/MM/DD)			
Karabon	2025/02/01			
Approved	Date (YYYY/MM/DD)			
Van Hulst	2025/02/01			

	All drawing revisions are stored in CAD PDM database
--	--

The copyright of this drawing is reserved by HellermannTyton.	
Units	mm

Drawn	Date (YYYY/MM/DD)
Karabon	2025/02/01
Approved	Date (YYYY/MM/DD)
Van Hulst	2025/02/01

Global Part Description		Material	Color
ROC15-19SLOT17-PA66HIRHSUV-BK		PA66HIRHSUV	Black
Title		Ratchet O-Clamp, 15-19mm, with 17mm connector clip slot	
Drawing-No		24-1440-001-CSU	
		Scale	1:1
		Global Project Number	24-1440
		Format	A3
		Sheet	1 / 1