

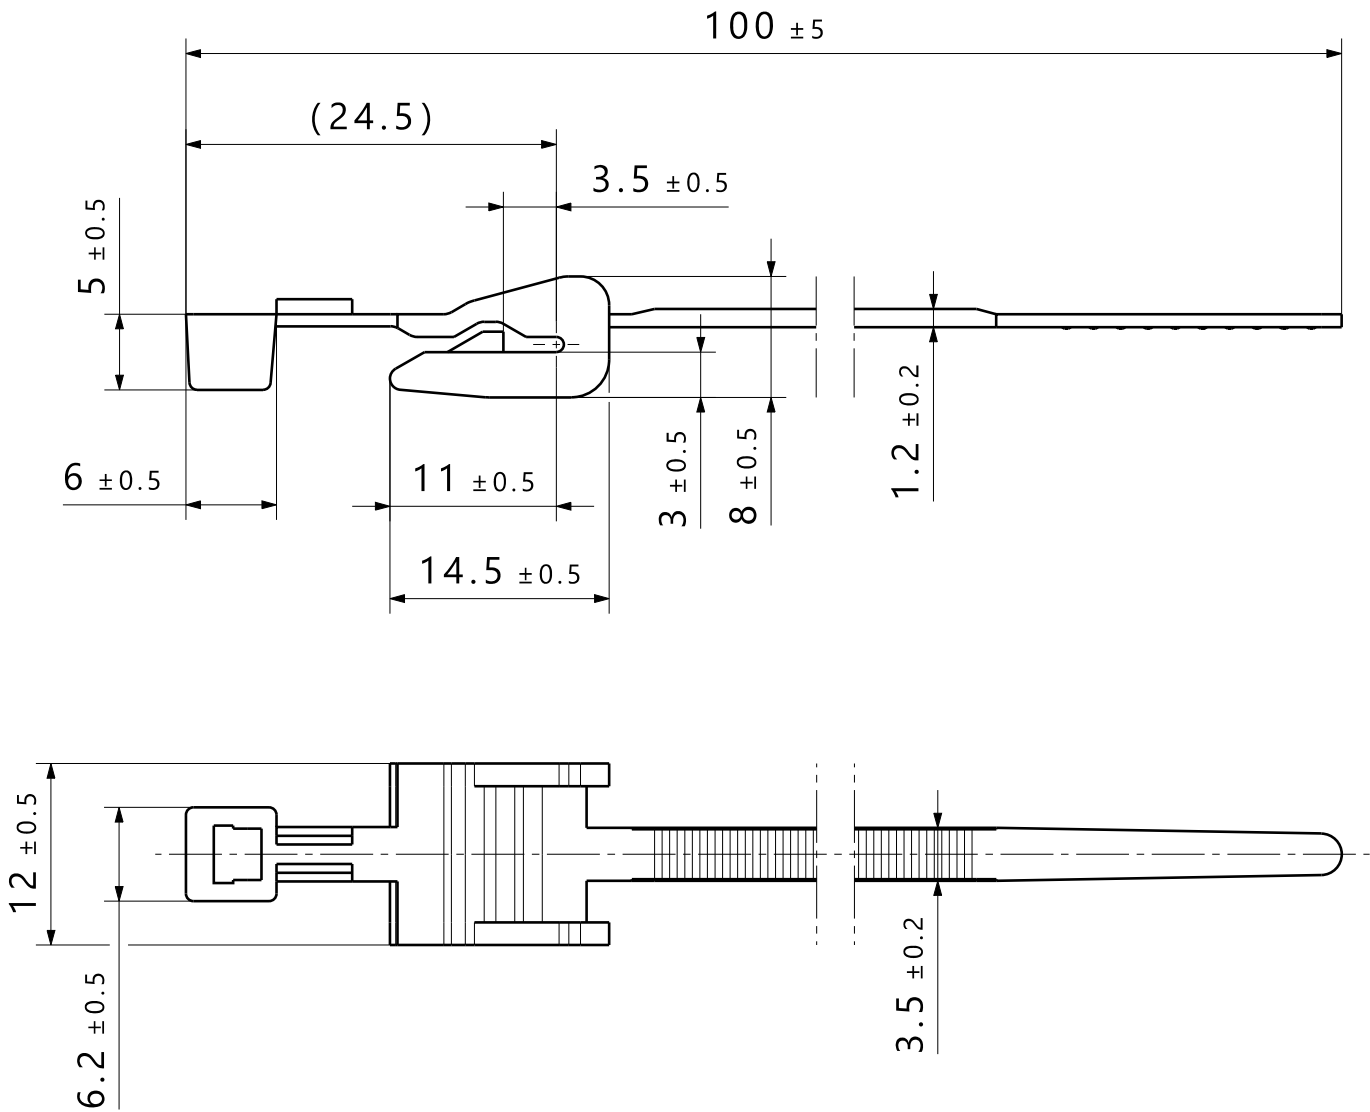


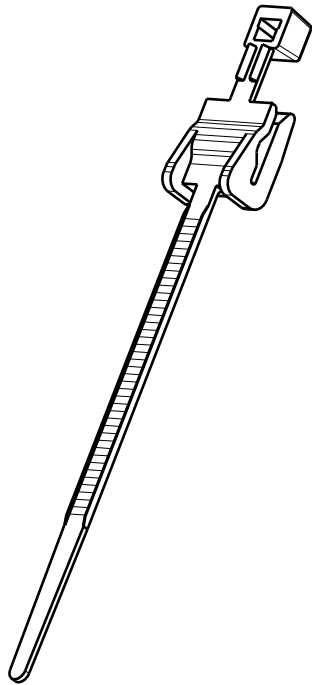

Hole pattern installation opening/
Lochbild Einbaueffnung

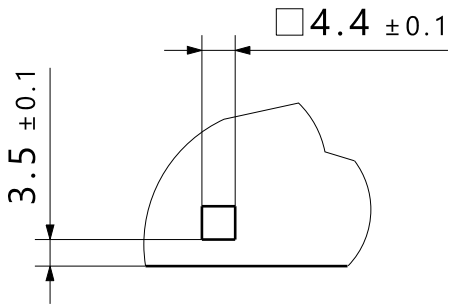

Printed copy for information only/
Ausdruck nur zur Information

Specification:

- Performance requirements at equilibrium condition standard atmosphere 23 °C / 50% RH

- Material: PA6.6
- Material color: black
- Bundle Ø: 1.5 - 18 mm
- Panel thickness: 0.6 - 1.0 mm

The manufacturing-related geometry changes (injection point, ejectors marks, etc.) allowed. Design of the details are left to suppliers discretion.

Spezifikation:

- Leistungsanforderung im Gleichgewichtszustand Normalklima 23 °C / 50% RH

- Material: PA6.6
- Material Farbe: schwarz
- Buendel Ø: 1.5 - 18 mm
- Blechdicke: 0.6 - 1.0 mm

Durch das Herstellverfahren bedingte Geometrieaenderungen (Anspritzung, Auswerfermarkierungen, etc.) zulaessig. Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen.

Revision Level		
Drawing	State	Part
01.4	Design Release	00
Changed	Date (YYYY/MM/DD)	
I. Langeloh	2025/02/03	
Approved	Date (YYYY/MM/DD)	
B. Schiwek	2025/02/03	

Revision Record	
Drawing-No was 14.1313, Drawing frame changed, Bundle Ø added, Hole description added	

All drawing revisions are stored in CAD PDM database

The copyright of this drawing is reserved by HellermannTyton.

Units
mm

Drawn	Date (YYYY/MM/DD)
Juers	1997/08/13
Approved	Date (YYYY/MM/DD)
Suck	1997/08/13

HellermannTyton
www.HellermannTyton.com

Title T30SKC0.8	Scale 2:1
	Global Project Number NT108-90
	Format A3
Drawing-No 90-0108-001-CSG	
Sheet 1 / 1	