


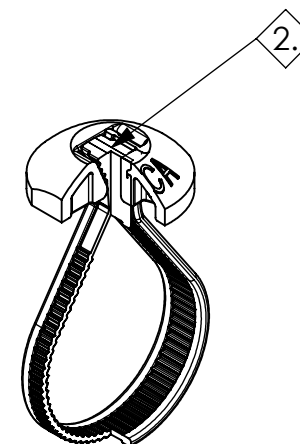
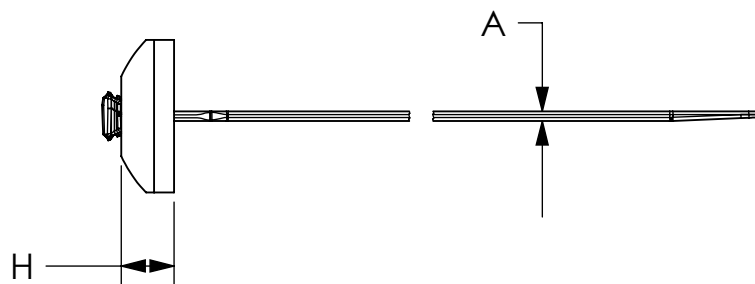


SW

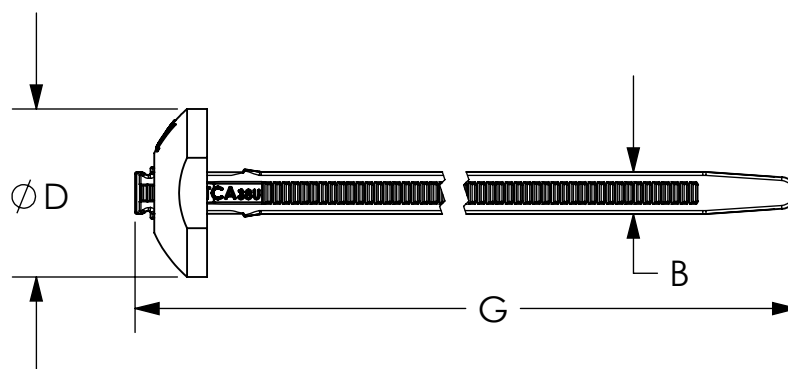

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
16.1	Design Release	-	SEE ECN# 310153	KAJ	07/24/2023	JPG	07/27/2023



ISOMETRIC VIEW
SECTION REMOVED
FOR CLARITY

NOTES:

1. LOOPED BUNDLE LOAD APPLIED IN LINE WITH MOUNTING HOLE AXIS
2. FOR PROPER INSTALLATION FULLY SEAT STRAP WEDGE

16.1

Global Part Description	Material	Color
BT105L-PA66HIRHSUV/PA66HS-BK	Head - PA66HS Strap - PA66HIRHSUV	Black

BUNDLE DIA. RANGE	A	B	D	G	H	PANEL HOLE DIAMETER	MIN LOOP TENSILE STRENGTH (N)
6.4 TO 110	1.3±0.2	5.6±0.25	22.2±0.6	381.0±8.0	7.0±0.5	6.0 TO 17.3	467

Material See table	Units: millimeters	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	PLN	01/12/2005	Article/Type-No	BT105L	Scale	1:1
			Approved	GGG	02/10/2005	Title	BUTTON HEAD TIE	Project Number	PRP 05-046
			 Web: www.HellermannTyton.com			Drawing-No	Production : Phase	Format	AH
						CT05-046-004CST		Sheet	1/1