


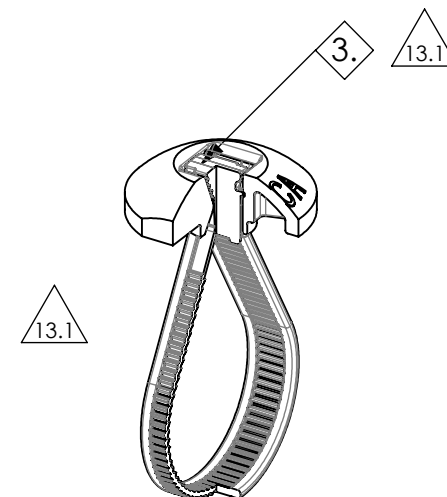


SW

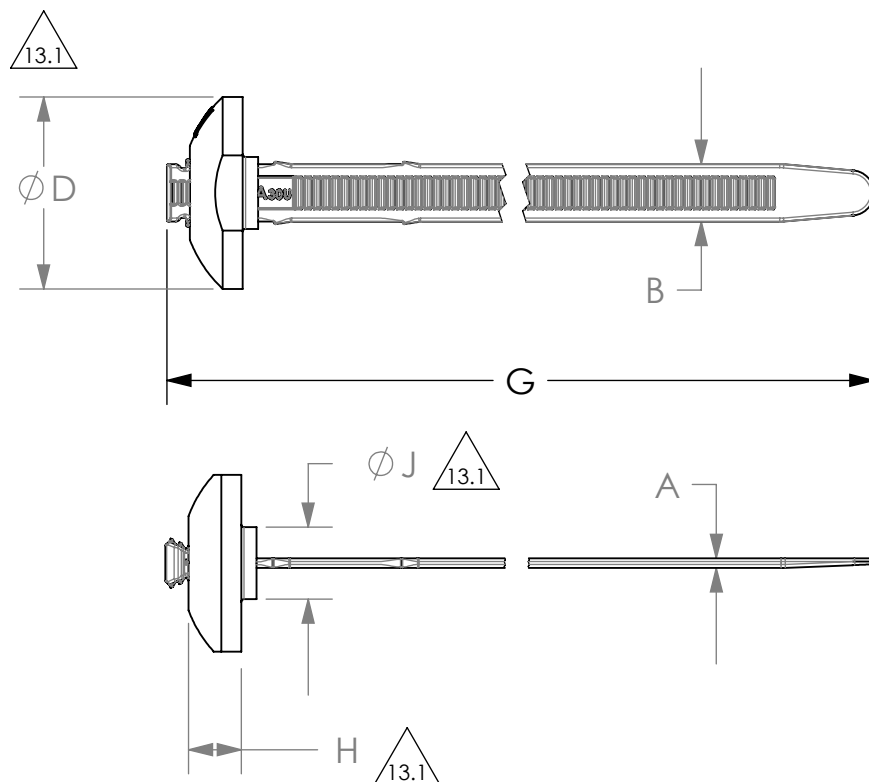

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
13.1	Design Release	-	SEE ECN# 015070	CTF	04/18/2019	JPG	04/18/2019



ISOMETRIC VIEW
SECTION REMOVED
FOR CLARITY

NOTES:

- RECOMMENDED APPLICATION TOOL IS THE HT MARK 9 (MK9)
- LOOPED BUNDLE LOAD APPLIED INLINE WITH MOUNTING HOLE AXIS
- FOR PROPER INSTALLATION FULLY SEAT STRAP WEDGE

BUNDLE DIA. RANGE	A	B	D	G	H	J	PANEL HOLE DIAMETER	MIN LOOP TENSILE STRENGTH (N)
6.4 TO 110	1.3 ±0.2	7.6±0.25	25.4±0.6	381.5±8.0	7.0±0.5	9.5±0.5	10.0 TO 20.83	578

Material
HEAD: PA66HS
COLOR: BLACK
STRAP: PA66HIRHSUV
COLOR: BLACK

Units: **millimeters**

Dimension without tolerances details to:

.xxx = ±.013

.xx = ±.13

.x = ±.3

None = ±.8

∠ = ±0.5°

Dimension Formatted mm/[in]

The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.

Drawn PLN 10/15/2004
Approved GGG 10/15/2004
HellermannTyton
North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No BT130LDP

Title **BUTTON HEAD TIE**

Drawing-No

PRODUCTION : Phase

CT05-047-004CST

Scale 1:1

Project Number

PRP 05-047

Format AH

Sheet 1/1