

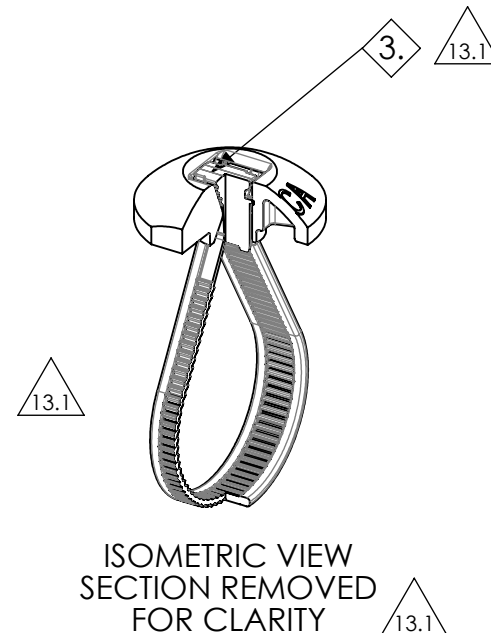
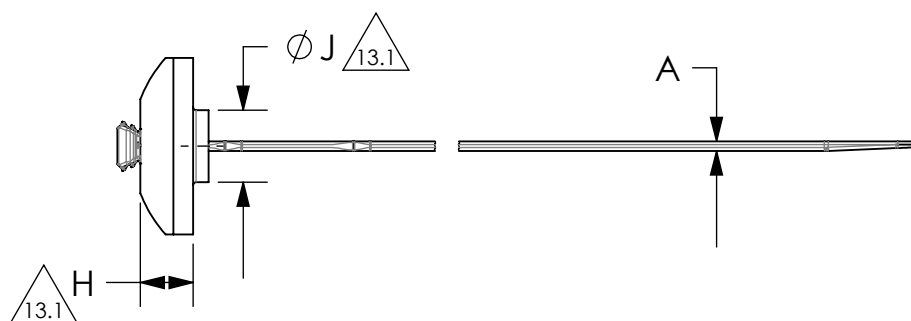
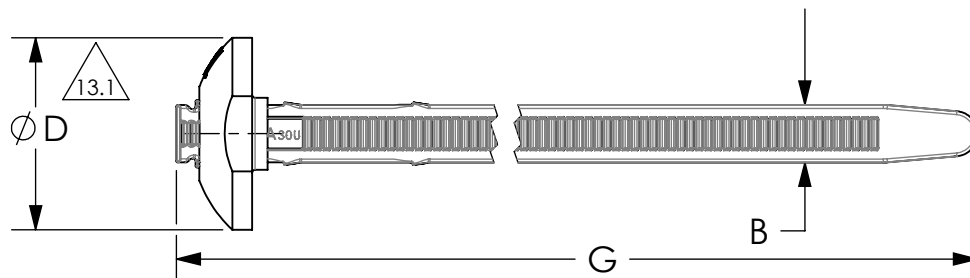


SW



Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
13.1	Design Release	-	SEE ECN# 015070	CTF	04/18/2019	JPG	04/18/2019

**NOTES:**

1. RECOMMENDED APPLICATION TOOL IS THE HT MARK 9 (MK9)
2. LOOPED BUNDLE LOAD APPLIED INLINE WITH MOUNTING HOLE AXIS
3. FOR PROPER INSTALLATION FULLY SEAT STRAP WEDGE

BUNDLE DIA. RANGE	A	B	D	G	H	J	PANEL HOLE DIAMETER	MIN LOOP TENSILE STRENGTH (N)
6.4 TO 73	1.3 ±0.2	7.6 ±0.25	25.4 ±0.6	267 ±8.0	7.0 ±0.5	9.5 ±0.5	10.0 TO 20.83	578

Material
HEAD: PA66HS
COLOR: BLACK
STRAP: PA66HIRHSUV
COLOR: BLACK

Units: **millimeters**
Dimension without
tolerances details to:
.xxx = ±.013
.xx = ±.13
.x = ±.3
None = ±.8
∠ = ±0.5°
Dimension Formatted mm[in]

The copyright of this
drawing is reserved by
HellermannTyton. It is
issued on condition that it is
not reproduced, copied, or
disclosed to a third party,
either wholly or in part,
without the consent of
HellermannTyton.

Drawn PLN 10/15/2004
Approved GGG 10/15/2004
HellermannTyton
North America
Email: corp@htamericas.com
Web: www.hellermann.tyton.com

Article/Type-No BT130RDP
Title **BUTTON HEAD TIE**
Drawing-No PRODUCTION : Phase
CT05-047-005CST

Scale 1:1
Project Number PRP 05-047
Format AH
Sheet 1/1