

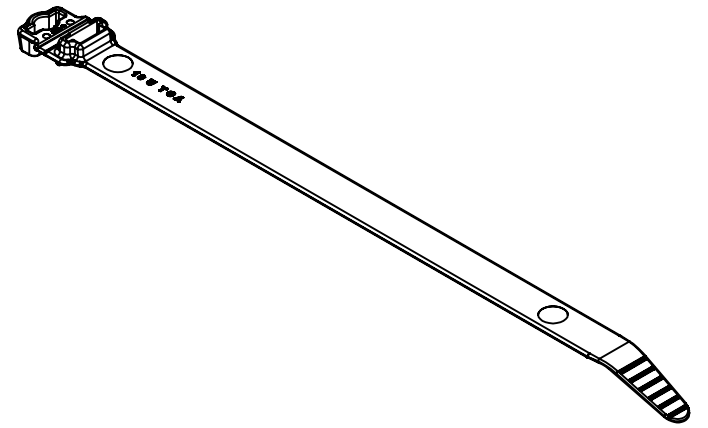
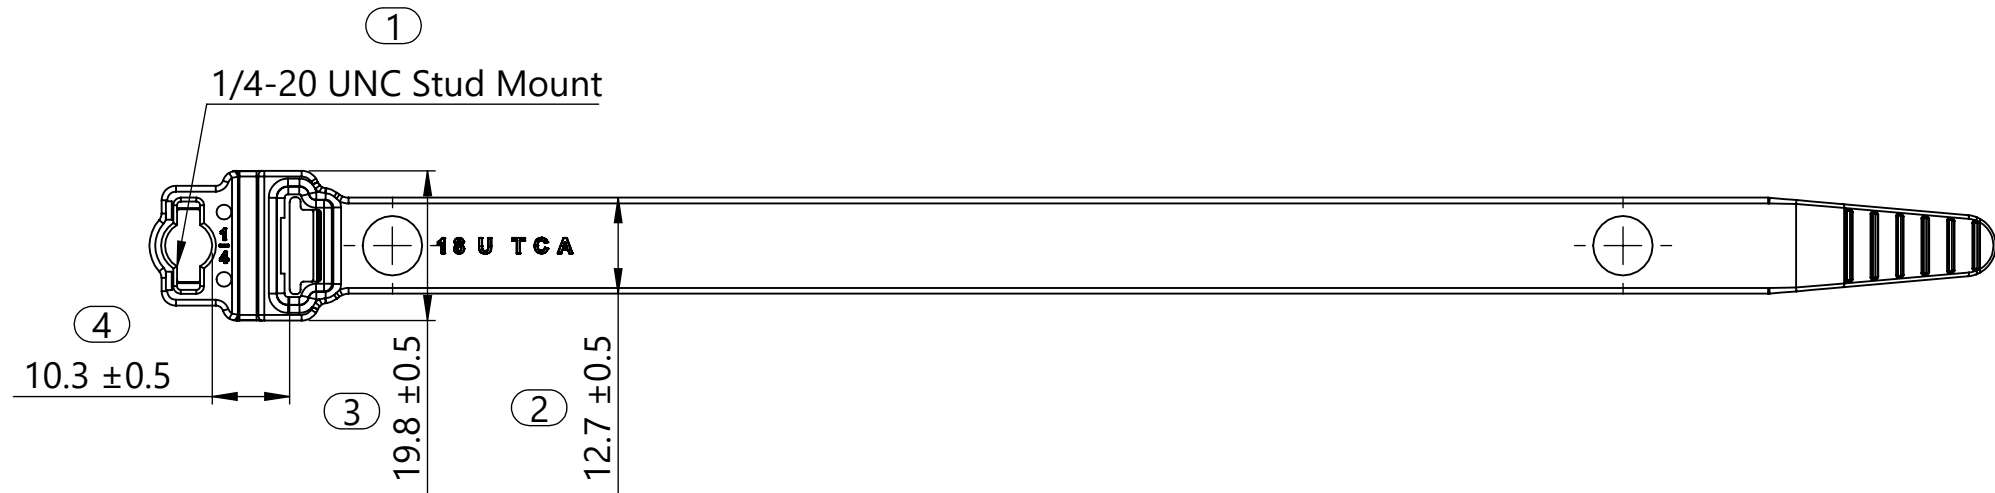




Isometric View
Scale 1:2

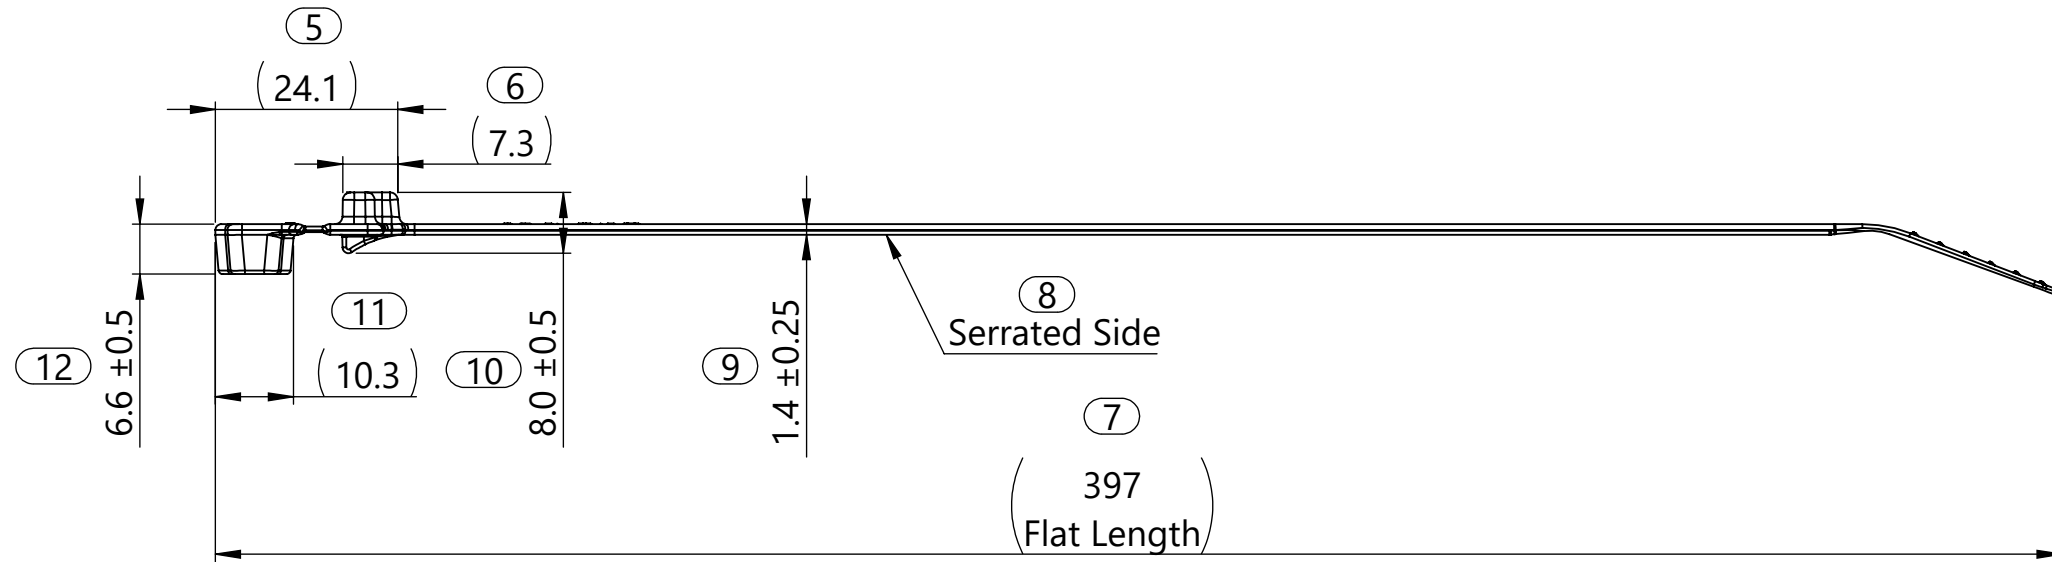

- 13 Performance Requirements (DAM):
- 0.25" stud push on force: 89N [20LBS] max
 - 0.25" stud pull off force: 178N [40LBS] min
 - Cable tie tensile strength: 534N [120LBS] min
 - Minimum bundle diameter: 9.5mm [0.375"]
 - Maximum bundle diameter: 104.8mm [4.125"]


- 06.3 14 Notes:
- A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - Total number of inspection required: 14
 - Last number used: 14
 - Missing symbols: -

06.3

06.3

Revision level		
Drawing	State	Part
06.3	Design Release	-
Changed	Date (YYYY/MM/DD)	
Mehl	2024/07/09	
Approved	Date (YYYY/MM/DD)	
Johnson	2024/07/09	

Revision Record		
ECN 311665		



The copyright of this drawing is reserved by HellermannTyton.

Units
mm

Drawn		Date (YYYY/MM/DD)
Mehl	2024/07/09	
Approved		Date (YYYY/MM/DD)
Johnson	2024/07/09	

HellermannTyton
www.HellermannTyton.com

Global Part Description		Material	Color
WSR250-PA66HIRHSUV-BK		PA66HIRHSUV	Black
Title Wide strap tie w/ 0.25" stud mount			Scale 1:1
Drawing-No CT06-026-004CST			Global Project Number 06-026
			Format A3
			Sheet 1/1