
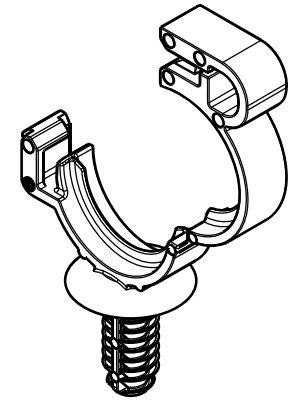




REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 13 LBS MAX IN A 6.6mm HOLE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 30 LBS MIN IN A 6.6mm HOLE AND A PLATE THICKNESS OF 1.8mm
3. SHEET METAL THICKNESS RANGE: 0.70mm - 12.7mm



Isometric View

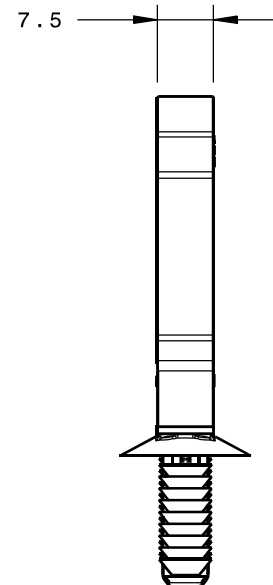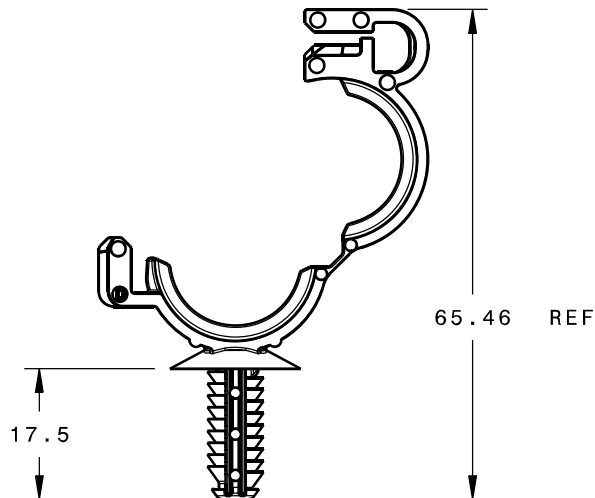

INVENTORS

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city, state
S. ADAMS	6/25/07	MENOMONEE FALLS, WI.

REVISIONS

level	by	date	ECN #	part level
07	CTF	02/05/2019	014912	-

DIMENSIONS

.XXXX	= ± 0.25
.XXX	= ± 0.50
.XX	= ± 1.00
.X	= ± 2.00
∠	= ± 0.50
unless otherwise specified	
units	millimeters

PART

number	phase
CTCL16FT6LG	PRODUCTION
name	16mm CONVOLUTED TUBING CLIP (6.65mm +/- 0.35 HOLE)
material	PA66HIRHSUV COLOR: BLACK



DRAWING

FORMAT	AH	CAD	CATIA V5	SCALE	1:1
VERSION	J				
A- SIZE (landscape)_N01		previous drawing number			
drawn	S. ADAMS	checked	A. Clark	approved	
	6/25/07		08/09/07		
CUSTOMER		sheet 1 of 1			
number	MT07-016-001CST				