

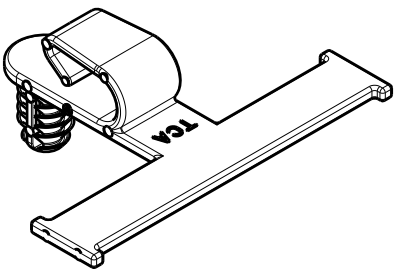
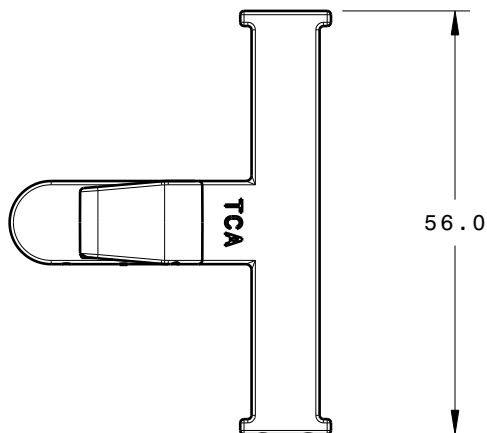


- REFERENCE:
PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:
- 1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN A 6.6mm HOLE AND A PLATE THICKNESS OF 1.8mm
 - 2. FIR TREE PULL OUT FORCE: REF. 30 LBS MIN IN A 6.6mm HOLE AND A PLATE THICKNESS OF 1.8mm
 - 3. SHEET METAL THICKNESS RANGE: 0.70mm - 5.50mm
 - 4. CIRCULAR HOLE SIZE DIAMETER: 6.6 +/- 0.30

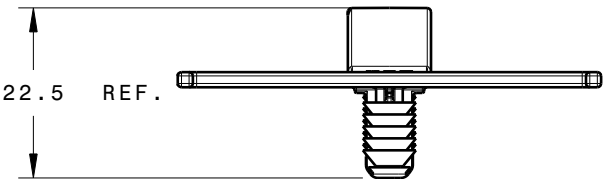

Isometric View

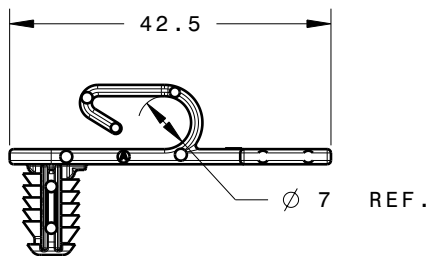

IN
V
E
N
T
O
R
S

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNTYTON

name	date	city, state
S. ADAMS	7/17/07	MENOMONEE FALLS, WI.

R
E
V
I
S
I
O
N
S

level	02
by	SJA
date	1/9/08
ECN #	010955
part level	A

D
I
M
E
N
S
I
O
N
S

TOOL TOLERANCES	.XXXX = ± 0.25
	.XXX = ± 0.50
	.XX = ± 1.00
	.X = ± 2.00
	∠ = ± 0.50
unless otherwise specified	
units	millimeters

P
A
R
T

number	SOCHFT6	PRODUCTION
name	TAPE CLIP WITH OFFSET (31mm) FIR TREE (6.6mm)	
material	NYLON 6/6, IMPACT MODIFIED, HEAT STABILIZED, UV RESISTANT COLOR: BLACK	

D
R
A
W
I
N
G

FORMAT	AH	CATIA V5		SCALE	1:1
VERSION	J	CAD			
A- SIZE (landscape)_N01			previous drawing number		
drawn	S. ADAMS	checked	J. PASSILLA	approved	
	7/30/07		7/30/07		
type	CUSTOMER		sheet 1 of 1		
number	MT07-028-003CST				