



REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:



1. SHEET METAL THICKNESS RANGE: 0.60mm - 5.75mm

2. CIRCULAR HOLE SIZE: 6.5 +/- 0.4mm

3. APPLICABLE HEX HOLE: 6.35mm +/- 0.25mm

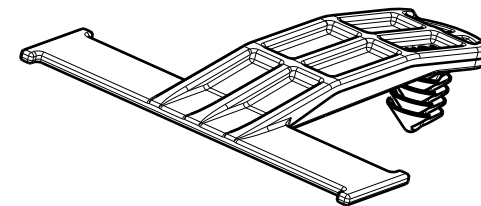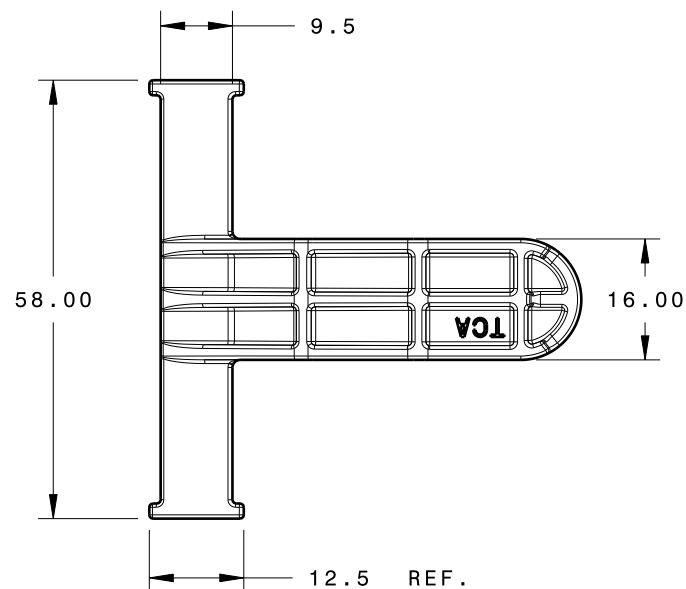

Isometric view

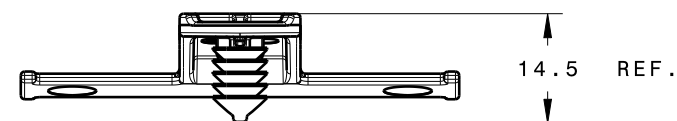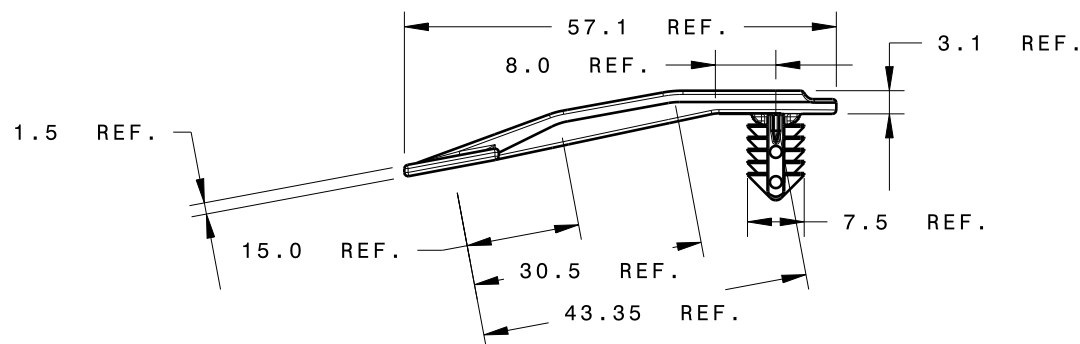

IN
V
E
N
T
O
R
S

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city state
SCOTT ADAMS	10/26/10	MENOMONEE FALLS, WI.

R
E
V
I
S
I
O
N
S

D
R
A
W
I
N
G

level
by
date
ECN #
part level

03
AAC
03/30/12
012060
B

D
I
M
E
N
S
I
O
N
S

T
O
L
E
R
A
N
C
E
S

units

millimeters

.XXXX = ± 0.25

.XXX = ± 0.375

.XX = ± 0.50

.X = ± 1.00

∠ = ± 1.0

unless otherwise specified

SOC10FT6LG

phase PRODUCTION

P
A
R
T

number
name
material

43mm OFFSET TAPE CLIP
WITH 6.5mm FIR TREE

PA66 HIRHS
COLOR: NATURAL

D
R
A
W
I
N
G

FORMAT
VERSION
A- SIZE (landscape)_N01
drawn
checked
approved
type
number

AH
J
S. ADAMS
11/1/10
CUSTOMER
MT10-0944-001CST

CAD
S. ADAMS
03/30/12
sheet 1 of 1

SCALE
previous drawing number
approved
sheet 1 of 1

2:1