

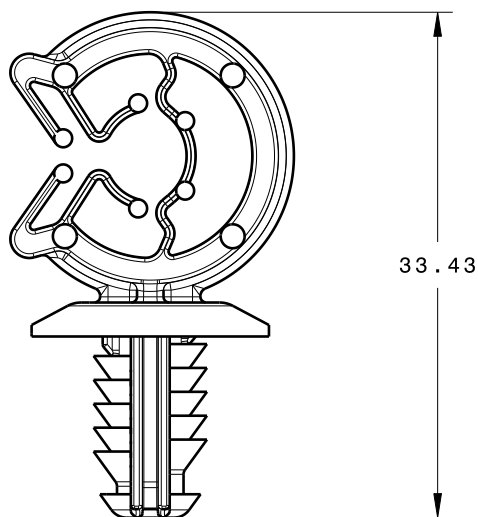



REFERENCE:

PERFORMANCE REQUIREMENTS AT DRY AS MOLDED:

1. FIR TREE PUSH IN FORCE: REF. 10 LBS MAX IN A 6.60 mm HOLE AND A PLATE THICKNESS OF 1.8mm
2. FIR TREE PULL OUT FORCE: REF. 25 LBS MIN IN A 6.6mm HOLE AND A PLATE THICKNESS OF 1.8mm
3. FIR TREE PANEL THICKNESS RANGE: .70mm TO 6.35mm



Isometric view
Scale: 1:1

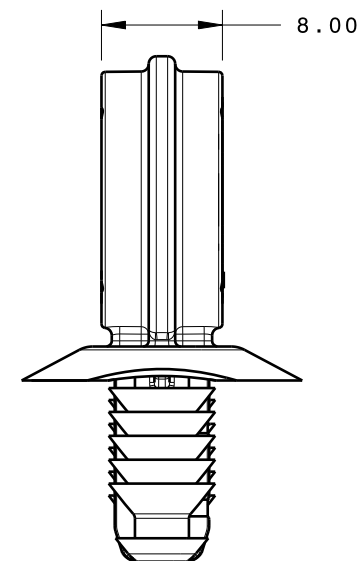

IN
V
E
N
T
O
R
S

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city, state
S. ADAMS	10/8/10	MENOMONEE FALLS, WI.

R
E
V
I
S
I
O
N
S

DRAWING	level	03
by	SJA	
date	2/17/11	
ECN #	011761	
part level	A	

D
I
M
E
N
S
I
O
N
S

TOLERANCES	.XXXX = ± 0.25
	.XXX = ± 0.50
	.XX = ± 0.75
	.X = ± 1.50
	∠ = ± 0.5
unless otherwise specified	
units	millimeters

P
A
R
T

number	SC6.6	phase	PRODUCTION
name	6.0 TO 7.6mm WIRE RETAINER WITH 6.60mm FIR TREE		
material	PA66HIRHSUV COLOR: BLACK		

D
R
A
W
I
N
G

FORMAT	AH	CAD	CATIA V5	SCALE	2:1
VERSION	J				
A- SIZE (landscape)_N01			previous drawing number		
drawn	S. ADAMS	checked	-	approved	
	10/8/10		-		
type	CUSTOMER			sheet 1 of 1	
number	MT10-0997-001CST				