




# NOTES:

- 1) USE WITH T18 THRU T50 CABLE TIES
- 2) MOUNTING HOLE Ø.250
- 3) MOUNTING HOLE MINIMUM DEPTH 1.000

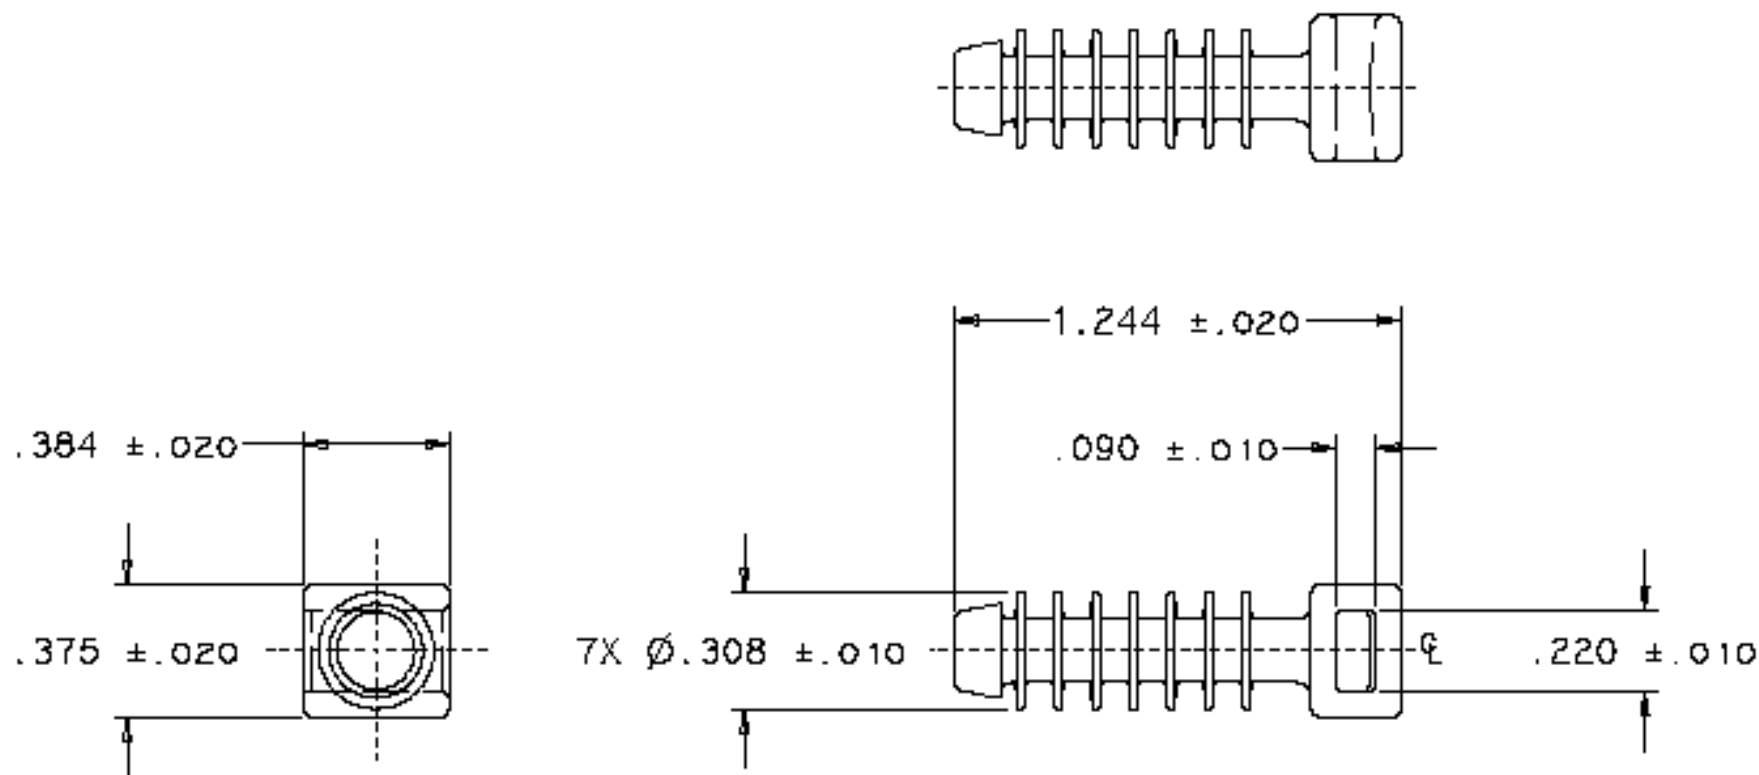

INVENTORS

**HellermannTyton**

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF TYTONHLLERMANN

| name | date | city, state |
|------|------|-------------|
|      |      |             |
|      |      |             |
|      |      |             |

REVISION

| level | by  | date    | part level |
|-------|-----|---------|------------|
|       | SSL | 4/10/98 | A          |
|       |     |         |            |
|       |     |         |            |

DIMENSIONS

| units                      | inches |
|----------------------------|--------|
| .XXXX = ±.0000             |        |
| .XXX = ±.005               |        |
| .XX = ±.01                 |        |
| .X = ±.03                  |        |
| ∠ = ±0.5°                  |        |
| unless otherwise specified |        |

PART

| number   | phase                             | production |
|----------|-----------------------------------|------------|
| MMB.5    |                                   |            |
| name     | MMB.5 MASONRY MOUNT               |            |
| material | NYLON 6/6<br>HIGH IMPACT<br>BLACK |            |

DRAWING

| number       | sheet        | of |
|--------------|--------------|----|
| MT2004002CST | 1            | 1  |
| type         | CUSTOMER     |    |
| number       | MT2004002CST |    |