

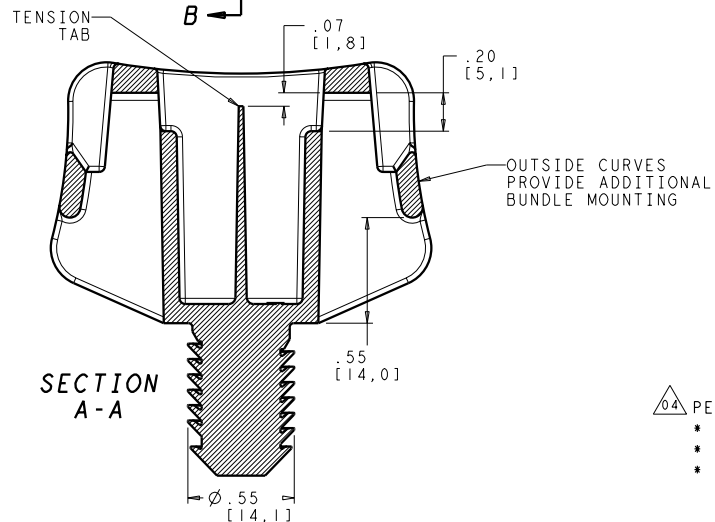
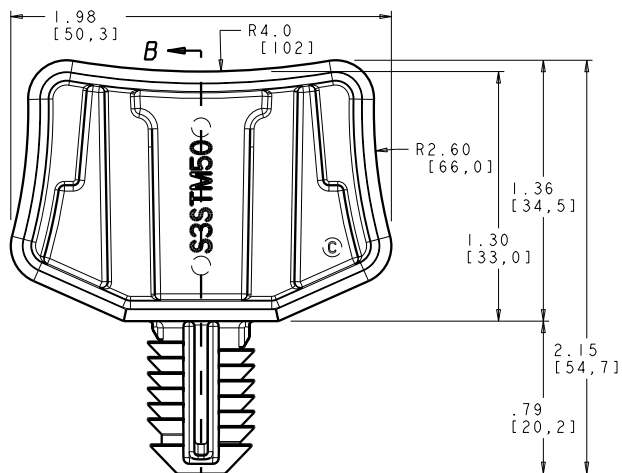
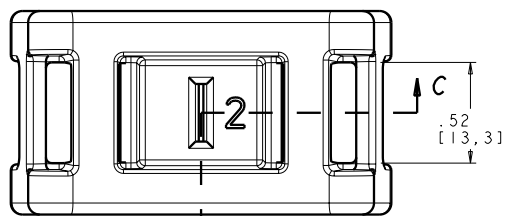


SECTION B-B

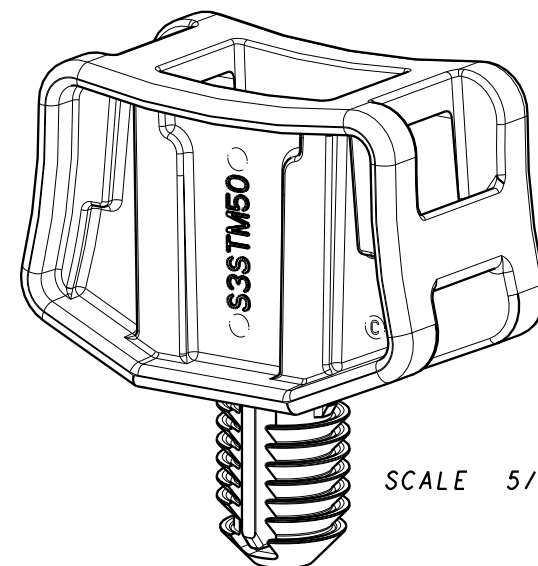

SCALE 5/4

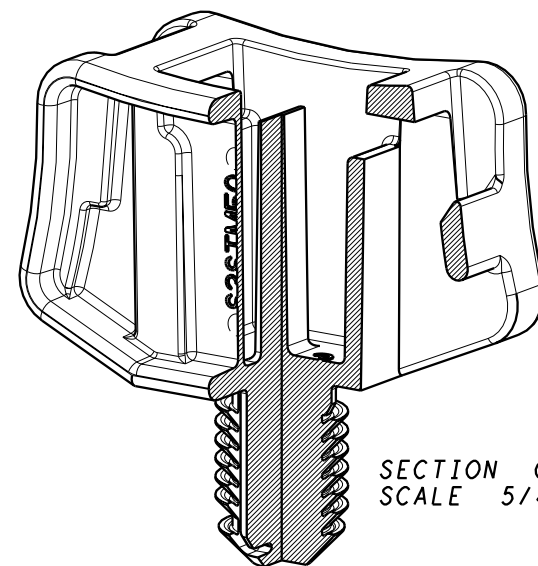

SECTION C-C
SCALE 5/4

- △04 PERFORMANCE REQUIREMENTS:
- * FIR TREE MOUNTS INTO .520 +/- .020" HOLES
 - * PANEL THICKNESS RANGE IS FROM .075 TO .515"
 - * FIR TREE PULL OUT FORCE IS GREATER THAN 140lbs IN A .520" HOLE AND A SHEET METAL THICKNESS OF .237"

INVENTORS

HellermannTyton®

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANN TYTON

name	date	city, state
GERRY GEIGER	1/2/98	JACKSON WI

REV	level	DATE	BY	DATE	ECN #	part level
04	JJP	8/6/08			011093	C

TOLERANCES	UNLESS OTHERWISE SPECIFIED
.XXXX= ±0.005	
.XXX= ±0.010	
.XX= ±0.02	
.X= ±0.1	
∠= ±0.5	
units	inches/mm

number	S3STM50	phase	△04 PRODUCTION
name	STANDOFF 3-WAY SADDLE with 1/2" FIR TREE MOUNT		
material	NYLON 6/6 IMPACT MODIFIED, HEAT STABILIZED BLACK		

FORMAT	AH version J	CAD	PRO-E	scale	1/1
computer file number		previous number			
drawn	G GEIGER	checked		approved	
date	1/2/98				
type	CUSTOMER			sheet	1 of 1
number	MT2022009CST				