



Mounts with cable clip, self-adhesive

RB-Series

RB-Series self adhesive mounts offer greater routing freedom and also reduce the risk of corrosion compared to screw fixing mounts. They are ideally suited for tool-free installation and can be re-opened and reused easily when cables need to be replaced. These mounts can be used without the need for additional cable ties. Offering process optimization in a variety of applications.

Features and benefits

- Flat design to use in applications with limited space
- One-piece self adhesive mount for quick and easy installation
- Can be used without cable ties offering process optimization
- Different sizes for various bundle diameters available
- Cost effective with easy application on smooth, clean surfaces


For more information on the types of adhesive please see page 165.



Self adhesive one piece fixing mounts RB20 (l) and RB14 (r).

MATERIAL	Polyamide 6.6 (PA66)
Adhesive	Acrylate with base of acrylic foam
Operating Temperature	-40 °C to +85 °C

RoHS

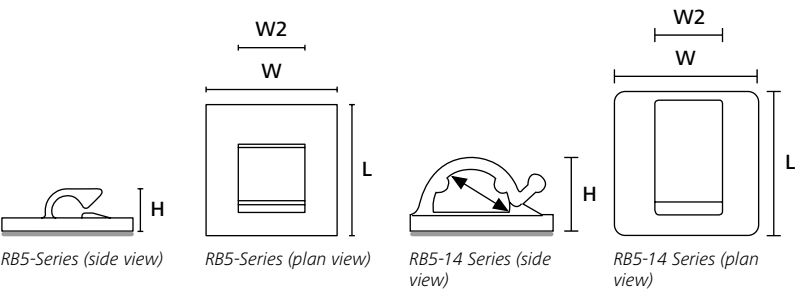

TYPE	Width (W)	Length (L)	Height (H)	Bundle Ø max.	Material	Colour	Article-No.
RB5APT-A	19.0	19.0	6.0	5.0	PA66	Black (BK)	151-14006
RB14APT-A	33.2	27.4	16.0	14.0	PA66	Black (BK)	151-03606

All dimensions in mm. Subject to technical changes.



Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Aluminium alloy	AL	-40 °C to +180 °C	Natural (NA)		<ul style="list-style-type: none">Corrosion resistantAntimagnetic	RoHS
Chloroprene Rubber	CR	-20 °C to +80 °C	Black (BK)		<ul style="list-style-type: none">Weather resistantHigh yield strength	RoHS
Ethylene Tetrafluoroethylene (Tefzel®)	E/TFE	-80 °C to +170 °C	Blue (BU)	UL 94 V0	<ul style="list-style-type: none">Resistance to radioactivityUV resistant, not moisture sensitiveGood chemical resistance to acids, bases, oxidizing agents	RoHS
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL 94 HB	<ul style="list-style-type: none">Limited brittleness sensitivityFlexible at low temperatureNot moisture sensitiveRobust on impact	RoHS
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Bio-plastic, derived from vegetable oilStrong impact resistance at low temperatureVery low moisture absorptionWeather resistantGood chemical resistance	HF RoHS
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Good chemical resistance to acids, bases, oxidizing agentsUV resistant	HF RoHS
Polyamide 4.6	PA46	-40 °C to +130 °C, (+150 °C, 5000 h; +195 °C, 500 h)	Natural (NA), Grey (GY)	UL 94 V2	<ul style="list-style-type: none">Resistance to high temperaturesVery moisture sensitiveLow smoke sensitivity	HF LFH RoHS
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL 94 V2	<ul style="list-style-type: none">High yield strength	RoHS
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Limited brittleness sensitivityHigher flexibility at low temperature	RoHS
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL 94 V2	<ul style="list-style-type: none">High yield strength	HF RoHS
Polyamide 6.6, glass-fibre reinforced	PA66GF13	-40 °C to +105 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Good resistance to lubricants, fuels, salt water and solvents	HF RoHS
Polyamide 6.6, heat and UV-stabilised	PA66HSUV	-40 °C to +105 °C	Black (BK)	UL 94 V2	<ul style="list-style-type: none">High yield strengthModified elevated maximum temperatureUV resistant	HF RoHS
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2	<ul style="list-style-type: none">High yield strengthModified elevated maximum temperature	HF RoHS
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Limited brittleness sensitivityHigher flexibility at low temperature	RoHS
Polyamide 6.6, high impact modified, heat and UV-stabilised	PA66HIRHSUV	-40 °C to +110 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Limited brittleness sensitivityHigher flexibility at low temperatureModified elevated maximum temperatureHigh yield strength, UV resistant	RoHS
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Limited brittleness sensitivityHigher flexibility at low temperatureModified elevated maximum temperature	RoHS
Polyamide 6.6, high impact modified, scan black)	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB	<ul style="list-style-type: none">Limited brittleness sensitivityHigher flexibility at low temperature	HF RoHS
Polyamide 6.6, UV-resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 V2	<ul style="list-style-type: none">High yield strengthUV resistant	HF RoHS

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Polyamide 6.6, with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL 94 HB	<ul style="list-style-type: none"> High yield strength Metal and X-Ray detectable 	HF RoHS
Polyamide 6.6, with metal particles	PA66MP+	-40 °C to +85 °C	Blue (BU)	not flame-retardant	<ul style="list-style-type: none"> High yield strength Metal and X-Ray detectable 	HF RoHS
Polyamide 6.6 V0	PA66V0	-40 °C to +85 °C	White (WH)	UL 94 V0	<ul style="list-style-type: none"> High yield strength Low smoke emission 	HF LFH RoHS
Polyester	SP	-50 °C to +150 °C	Black (BK)		<ul style="list-style-type: none"> UV resistant Good chemical resistance to most acids, bases and oils 	HF LFH RoHS
Polyetheretherketone	PEEK	-55 °C to +240 °C	Beige (BGE)	UL 94 V2	<ul style="list-style-type: none"> Resistance to radioactivity Not moisture sensitive Good chemical resistance to acids, bases, oxidising agents 	HF LFH RoHS
Polyethylene	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL 94 HB	<ul style="list-style-type: none"> Low moisture absorption Good chemical resistance to most acids, bases, alcohol, oils 	HF RoHS
Polyolefin	PO	-40 °C to +90 °C	Black (BK)	UL 94 V0	<ul style="list-style-type: none"> Low smoke emissions 	HF LFH RoHS
Polypropylene	PP	-40 °C to +115 °C	Black (BK), Natural (NA)	UL 94 HB	<ul style="list-style-type: none"> Floats in water Moderate yield strength Good chemical resistance to acids, bases and solvents 	HF RoHS
Polypropylene, Ethylene Propylene Diene Terpolymer rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> Good resistance to high temperature Good chemical and abrasion resistance 	HF RoHS
Polypropylene with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL 94 HB	<ul style="list-style-type: none"> Metal and X-Ray detectable Heat resistant Moderate yield strength Good chemical resistance 	RoHS
Polypropylene with metal particles	PPMP+	-40 °C to +85 °C	Blue (BU)	not flame-retardant	<ul style="list-style-type: none"> High yield strength Metal and X-Ray detectable 	HF RoHS
Polyvinylchloride	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL 94 V0	<ul style="list-style-type: none"> Low moisture absorption Good chemical resistance to acids, bases, salts, alcohol, oils 	RoHS
Stainless Steel, Stainless Steel	SS304, SS316	-80 °C to +538 °C	Natural (NA)	non-burning	<ul style="list-style-type: none"> Corrosion resistant Antimagnetic Weather resistant Chemical resistance SS316 also resistant against seawater, salt spray and anorganic acids 	HF LFH RoHS
Thermoplastic Polyurethane	TPU	-40 °C to +85 °C	Black (BK)	UL 94 HB	<ul style="list-style-type: none"> High elasticity Good chemical resistance to acids, bases and oxidising agents 	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*These details are only guide values. They should not be regarded as an exhaustive material specification and are no substitute for suitability tests. Please see our datasheets for further details.

HF = Halogen Free

LFH = Limited Fire Hazard

RoHS = Restriction of Hazardous Substances

**Further colours available on request.



N = Minimum Loop Tensile Strength
for Cable Ties (newton)

**For more material information
please visit our website.**