

Cable Tie locked by glass fibre pin

This cable tie is distinguished by its smooth strap and unique locking mechanism. The chamfered head of the KR-Series allows for a firm fit around the bundled element. Due to its special design KR-Series cable ties can be used as a safety method to bundle any cable and to also secure bellows on steering racks, water hoses or vacuum lines. The endless strap version is fairly flexible and can be cut to any length required. Separate heads are available to fix the strap.


Features and benefits

- Cable tie without serration to avoid any damage to cables
- Strap is locked into place with a glass-fibre reinforced pin
- Very secure and vibration resistant fixing
- Available in various materials, colours and almost every length
- Cable ties from PA12 are highly resistant to chemicals, impact and UV light
- KR-ties up to 426 mm are made as one piece
- For assembly a special KR-tool is needed




The KR-Series has been repeatedly proven in high vibration applications.


KR-Series, 1-Piece

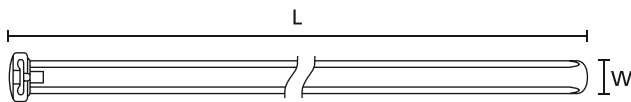

Cable tie KR-Series

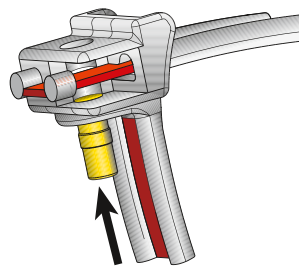

The unlocked head of a KR-tie.




The cable tie (red) is locked into place with the pin.

PART DESCRIPTION	Width (W)	Length (L)	Bundle Ø max.	N
KR6/35-PA66HS-NA	6.1	360.0	93.0	490
KR8/21-PA66HS-NA	8.0	210.0	47.0	785
KR8/33-PA12-BK	8.0	337.0	86.0	390
KR8/33-PA66HS-BK	8.0	337.0	86.0	785
KR8/33-PA46-GY	8.0	337.0	86.0	785
KR8/33-PA66HS-NA	8.0	337.0	86.0	785
KR8/43-PA66HS-BK	8.0	426.0	105.0	785
KR8/43-PA66HS-NA	8.0	426.0	105.0	785

All dimensions in mm. Subject to technical changes.

KR-Series, endless

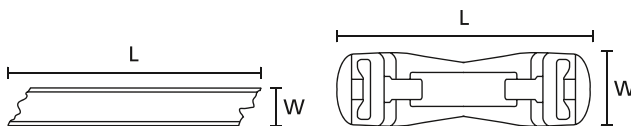

Cable tie KR8S1

Double-head KR8C5

PART DESCRIPTION	Width (W)	Length (L)	N
KR8/S1-PA66HS-NA	8.0	50.0 m	785
KR8/C5-PA66HS-NA	11.7	38.0	-

All dimensions in mm. Subject to technical changes.



Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour*	Flammability
Aluminium alloy	AL	-40 °C to +180 °C	Natural (NA)	
Chloroprene Rubber	CR	-20 °C to +80 °C	Black (BK)	
Ethylene Tetrafluoroethylene (Tefzel®)	E/TFE	-80 °C to +170 °C	Blue (BU)	UL 94 V0
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL 94 HB
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 11, UV-resistant	PA11W	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 4.6	PA46	-40 °C to +130 °C, (+150 °C, 5000 h; +195 °C, 500 h)	Natural (NA), Grey (GY)	UL 94 V2
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL 94 V2
Polyamide 6, glass-fibre reinforced	PA6GF30	-40 °C to +100 °C	Black (BK)	UL 94 HB
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL 94 HB
Polyamide 6, high impact modified, heat stabilised	PA6HIRHS	-80 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, glass-fibre reinforced	PA66GF13	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, glass-fibre reinforced	PA66GF15	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, heat and UV stabilised	PA66HSUV	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, heat and UV stabilised	PA66HSW	-40 °C to +105 °C	Black (BK)	UL 94 V2
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSUV	-40 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised (only for cable ties for Autotool System 3080)	PA66HIRHSUV	-40 °C to +95 °C, (+105 °C, 5000 h; +145 °C, 500 h)	Black (BK), Natural (NA)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSW	-40 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, scan black	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*Further colours available on request.



**Minimum Loop Tensile Strength
for Cable Ties (Newton)**

MATERIAL	Material Shortcut	Operating Temperature	Colour*	Flammability
Polyamide 6.6, UV resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 V2
Polyamide 6.6, UV-stabilised	PA66UV	-40 °C to +85 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL 94 HB
Polyamide 6.6, with metal particles	PA66MP+	-40 °C to +85 °C	Blue (BU)	not flame retardant
Polyamide 6.6 V0	PA66V0	-40 °C to +85 °C	White (WH)	UL 94 V0
Polyaryletherketone	PAEK	-55 °C to +200 °C	Beige (BGE)	UL 94 V0
Polyester	SP	-50 °C to +150 °C	Black (BK)	
Polyetheretherketone	PEEK	-55 °C to +240 °C	Beige (BGE)	UL 94 V0
Polyethylene	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL 94 HB
Polyolefin	PO	-40 °C to +90 °C	Black (BK)	UL 94 V0
Polyphenylene Sulfide	PPS	-40 °C to +150 °C	Black (BK), Grey (GY)	UL 94 V0
Polypropylene, Ethylene Propylene Diene Terpolymer rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL 94 HB
Polypropylene 20% Talkum	PPT20	-40 °C to +65 °C	Black (BK)	UL 94 HB
Polypropylene with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL 94 HB
Polypropylene with metal particles	PPMP+	-40 °C to +85 °C	Blue (BU)	not flame retardant
Polyvinylidene Fluoride	PVDFX	-50 °C to +150 °C	Natural (NA)	UL 94 V0
Polyvinylchloride	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL 94 V0
Stainless Steel	SS304, SS316	-80 °C to +538 °C	Natural (NA)	non-burning
Thermoplastic Polyurethane	TPU	-40 °C to +85 °C	Black (BK)	UL 94 HB

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*Further colours available on request.



= Minimum Loop Tensile Strength
for Cable Ties (Newton)

Tip: Material shortcut is part of our Part Description name

Product series name (indicating tie type, clip and harness routing variant)

Material code

Colour code (details on page 326)

T50ROSEC5A-PA66HS/PA66HIRHS-BK