



2-Pieces Fixing Ties with Deep Hole Anchor, with Disc, for Round Holes


Deep Hole Anchor DHA5.5 - DHA8.4

Features and benefits

- Pre-assembled 2-piece fixing tie with deep hole anchor
- The high 'pull off' forces are due to the integrated metal clamp
- Cable tie head can be moved after bundling
- Easy to assemble without the need for a tool
- Disc adjusts tie for pressure from various directions and minimises ingress of dust and dirt
- Suitable for use within blind holes with or without thread



DHA5.5x15 and DHA8.4x20 for blind hole applications.



Reference for dimensions only



Material specification
please see page 22.

PART DESCRIPTION	Drawing	Hole Ø (FH)	Panel Thickness	Width (W)	Length (L)	Bundle Ø max.	N
T50RDHA5.5x15-PA46-GY		5.4 - 5.6	15.0	4.6	202.0	45.0	225
T30RDHA8.4x20-PA66HIRHS-BK		8.3 - 8.5	20.0	4.6	200.0	30.0	135
T50RDHA8.4x20-PA46-GY		8.3 - 8.5	20.0	4.6	202.0	45.0	225

All dimensions in mm. Subject to technical changes.

2-Piece Fixing Ties with Arrowhead, with Disc

2-Piece Fixing Ties with Arrowhead, for Round Holes, for Parallel Routing


Primarily designed for fixing cable harnesses in the automotive industry their simplicity, and ease of use, has seen these parts used in everything from aircraft, to switch-gear, to washing machines.

Features and benefits


- Pre-assembled 2-piece fixing tie with arrowhead foot part
- Cable tie head can be moved after bundling
- Easy to assemble without the need for a tool
- Arrowhead simply locks into place
- DSFT-version for parallel routing of two bundles



T50SOSDSFT6.5 for parallel routing.

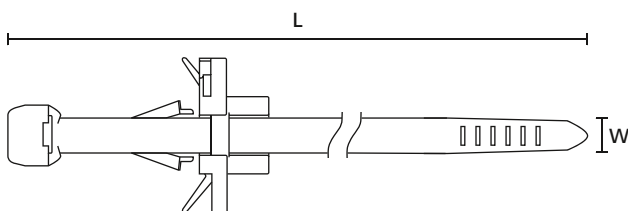

T50SOSDSFT6.5



T50SOSDSFT6.5

PART DESCRIPTION	Hole Ø (FH)	Panel Thickness	Width (W)	Length (L)	Bundle Ø max.	N
T50SOSDSFT6.5-PA66HS/PA66HIRHS-BK	6.3 - 6.7	0.7 - 1.5	4.6	150.0	15.0	225

All dimensions in mm. Subject to technical changes.



Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour*	Flammability
Aluminium alloy	AL	-40 °C to +180 °C	Natural (NA)	
Chloroprene Rubber	CR	-20 °C to +80 °C	Black (BK)	
Ethylene Tetrafluoroethylene (Tefzel®)	E/TFE	-80 °C to +170 °C	Blue (BU)	UL 94 V0
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL 94 HB
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 11, UV-resistant	PA11W	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 4.6	PA46	-40 °C to +130 °C, (+150 °C, 5000 h; +195 °C, 500 h)	Natural (NA), Grey (GY)	UL 94 V2
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL 94 V2
Polyamide 6, glass-fibre reinforced	PA6GF30	-40 °C to +100 °C	Black (BK)	UL 94 HB
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL 94 HB
Polyamide 6, high impact modified, heat stabilised	PA6HIRHS	-80 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, glass-fibre reinforced	PA66GF13	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, glass-fibre reinforced	PA66GF15	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, heat and UV stabilised	PA66HSUV	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, heat and UV stabilised	PA66HSW	-40 °C to +105 °C	Black (BK)	UL 94 V2
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSUV	-40 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised (only for cable ties for Autotool System 3080)	PA66HIRHSUV	-40 °C to +95 °C, (+105 °C, 5000 h; +145 °C, 500 h)	Black (BK), Natural (NA)	UL 94 HB
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSW	-40 °C to +110 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL 94 HB
Polyamide 6.6, high impact modified, scan black	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL 94 HB

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*Further colours available on request.



**Minimum Loop Tensile Strength
for Cable Ties (Newton)**

MATERIAL	Material Shortcut	Operating Temperature	Colour*	Flammability
Polyamide 6.6, UV resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL 94 V2
Polyamide 6.6, UV-stabilised	PA66UV	-40 °C to +85 °C	Black (BK), Natural (NA)	UL 94 V2
Polyamide 6.6, with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL 94 HB
Polyamide 6.6, with metal particles	PA66MP+	-40 °C to +85 °C	Blue (BU)	not flame retardant
Polyamide 6.6 V0	PA66V0	-40 °C to +85 °C	White (WH)	UL 94 V0
Polyaryletherketone	PAEK	-55 °C to +200 °C	Beige (BGE)	UL 94 V0
Polyester	SP	-50 °C to +150 °C	Black (BK)	
Polyetheretherketone	PEEK	-55 °C to +240 °C	Beige (BGE)	UL 94 V0
Polyethylene	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL 94 HB
Polyolefin	PO	-40 °C to +90 °C	Black (BK)	UL 94 V0
Polyphenylene Sulfide	PPS	-40 °C to +150 °C	Black (BK), Grey (GY)	UL 94 V0
Polypropylene, Ethylene Propylene Diene Terpolymer rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL 94 HB
Polypropylene 20% Talkum	PPT20	-40 °C to +65 °C	Black (BK)	UL 94 HB
Polypropylene with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL 94 HB
Polypropylene with metal particles	PPMP+	-40 °C to +85 °C	Blue (BU)	not flame retardant
Polyvinylidene Fluoride	PVDFX	-50 °C to +150 °C	Natural (NA)	UL 94 V0
Polyvinylchloride	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL 94 V0
Stainless Steel	SS304, SS316	-80 °C to +538 °C	Natural (NA)	non-burning
Thermoplastic Polyurethane	TPU	-40 °C to +85 °C	Black (BK)	UL 94 HB

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton also uses equivalent E/TFE raw material from other suppliers.

*Further colours available on request.



= Minimum Loop Tensile Strength
for Cable Ties (Newton)

Tip: Material shortcut is part of our Part Description name

Product series name (indicating tie type, clip and harness routing variant)

Material code

Colour code (details on page 326)

T50ROSEC5A-PA66HS/PA66HIRHS-BK