

Heat shrinkable tubing 4:1 - 1.2 m lengths

TG40 - thin wall adhesive lined

TG40 is designed to insulate, seal and protect wire bundles, connectors, terminals and in-line splices in automotive wire harnesses and electronic assemblies.

Features and benefits


- Semi-rigid, thin wall polyolefin adhesive lined heat shrink tubing
- Good sealing properties and chemical resistance
- Flame-retardant (self-extinguishing)
- Provides an environmental sealing
- Resistant against acids, alkalis, oils and fuels



Heatshrinkable tubing TG40 in black and clear available.



Cut lengths available on request. Please contact us!

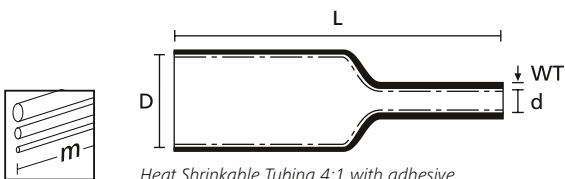

Heat Shrinkable Tubing 4:1 with adhesive

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	4:1
Operating Temperature	-55 °C to +125 °C
Min. Shrink Temperature	+110 °C
Longitudinal Change After Shrinkage	+/-10 % max
Dielectric Strength	12 kV/mm
Flammability	self-extinguishing (except for transparent)



PART DESCRIPTION	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)
TG40 6/1.27-PO-X-BK	6.00	1.27	1.30	1.2 m
TG40 6/1.27-PO-X-CL	6.00	1.27	1.30	1.2 m
TG40 8/1.65-PO-X-BK	8.00	1.65	1.52	1.2 m
TG40 8/1.65-PO-X-CL	8.00	1.65	1.52	1.2 m
TG40 12/2.41-PO-X-BK	12.00	2.41	1.91	1.2 m
TG40 12/2.41-PO-X-CL	12.00	2.41	1.91	1.2 m
TG40 18/4.45-PO-X-BK	18.00	4.45	2.41	1.2 m
TG40 18/4.45-PO-X-CL	18.00	4.45	2.41	1.2 m

All dimensions in mm. Subject to technical changes.