

2-Piece Fixing Ties with Arrowhead, with Disc

Primarily designed for fixing cable harnesses in the automotive industry, their simplicity and ease of use has resulted in these parts being used in other industries, for example aviation, switch gear and white goods manufacturing.


Features and Benefits

- Pre-assembled 2-piece fixing tie with arrowhead foot part
- Cable tie head can be moved after bundling
- Easy to assemble without the need for a tool
- Arrowhead simply locks into place
- Disc adjusts tie for pressure from various directions




Being a two piece assembly allows the tie head to be located in the most convenient position.

2-Piece Fixing Ties with Arrowhead, with Disc, sealed

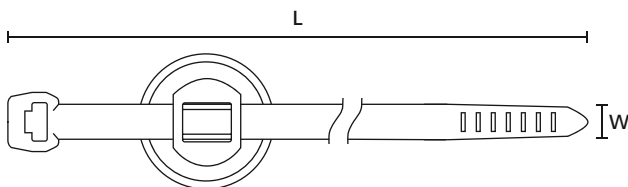

T50ROSSFT6.5-16-2MOD-MD

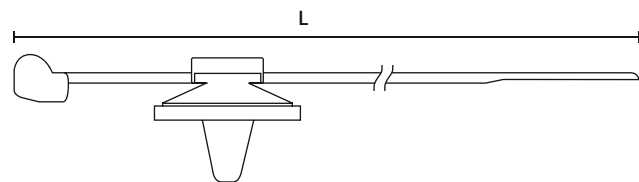


T50ROSSFT6.5-16-2MOD-MD


TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
T50ROSSFT6.5-D16-2 MD	4.6	200.0	45.0	222	22.4	6.3 - 6.7	0.7 - 1.8	PA66HS	PA66HIRHS	Black (BK)	2-10	150-93100
T50ROSSFT6.5-16-2-MD	4.6	200.0	45.0	225	16.0	6.3 - 6.7	0.7 - 1.2	PA66HS	PA66HIRHS	Black (BK)	2-10	155-42002
T50ROSSFT6.5 16-3MD	4.6	200.0	45.0	225	16.0	6.3 - 6.7	2.5 - 3.5	PA66HS	PA66HIRHS	Black (BK)	2-10	150-37799
T50RAHD6-MS-MD	4.6	202.0	50.0	225	18.0	6.5 - 7.0	0.7 - 1.2	PA66HS	PA66HS	Natural (NA)	2-10	156-01193

All dimensions in mm. Subject to technical changes.

2-Piece Fixing Ties with Arrowhead, for oval holes

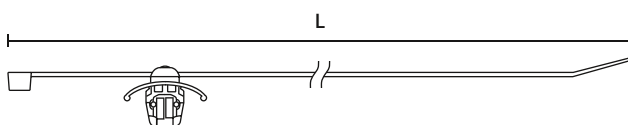

T50RFT62x122



T50RFT62x122

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
T50RFT62x122HR	4.6	202.0	45.0	225	6.3 x 12.2	0.6 - 3.0	PA46	PA46	Grey (GY)	2-10	156-00446
T50RFT60VAL	4.6	202.0	45.0	355	6.3 x 12.2	0.6 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2-10	150-37591

All dimensions in mm. Subject to technical changes.

Recommended Tools


2	3	4	5	6	7	8	9	10
MK20	MK21	MK3SP	MK3PNSP2	EVO7	MK7HT	MK7P	MK6	MK9

For more information on toolings please refer to the Application Tooling chapter.




2-Piece Fixing Ties with Arrowhead, with Disc


2-Piece Fixing Ties with Arrowhead, with Disc, for round holes




T50SSFT6.5



T50RSFT6.5D18



T50ROSSFT6.5 16-3

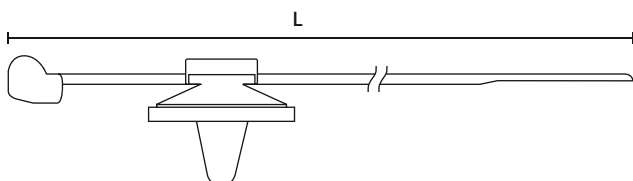

T50ROSSFT6.5-16-2MOD-MD




Other dimensions are available on request.


TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
T50SOSSFT65162OD	4.6	150.0	35.0	225	16.0	6.3 - 6.7	1.5 - 2.2	PA66HS	PA66HIRHS	Black (BK)	2-10	150-93130
T50SSFT6.5	4.6	150.0	35.0	225	22.4	6.3 - 6.7	0.7 - 2.0	PA66HS	PA66HS	Black (BK)	2-10	150-13593
T50RSFT6.5D18	4.6	200.0	45.0	200	18.0	6.5 - 6.8	0.4 - 1.6	PA66HS	PA66HIRHS	Black (BK)	2-10	150-37691
T50ROS-SFT6.5 16-3	4.6	200.0	45.0	225	16.0	6.3 - 6.7	2.5 - 3.5	PA66HS	PA66HIRHS	Black (BK)	2-10	150-37791
T50RSFT6.5	4.6	200.0	45.0	225	22.4	6.3 - 6.7	0.7 - 2.0	PA66HS	PA66HS	Black (BK)	2-10	150-13591
T50RSFT6.5 16-3	4.6	200.0	49.0	222	16.0	6.3 - 6.7	2.5 - 3.5	PA66HS	PA66HIRHS	Black (BK)	2-10	150-37792
T80ISFT6.5	4.6	300.0	81.0	355	22.4	6.3 - 6.7	0.7 - 2.0	PA66HS	PA66HS	Black (BK)	2-12	150-13596
T50RDHSFT6.5	4.7	210.0	38.0	178	22.4	6.4 - 6.8	0.7 - 2.0	PA66HS	PA66HS	Black (BK)	2-10	117-05160

All dimensions in mm. Subject to technical changes.

2-Piece Fixing Ties with Arrowhead, for parallel routing

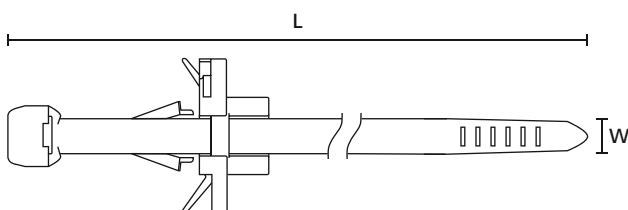

T50SOSDSFT6.5



T50SOSDSFT6.5

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
T50SOSDSFT6.5	4.6	150.0	35.0	225	6.3 - 6.7	0.7 - 1.5	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00133

All dimensions in mm. Subject to technical changes.

Recommended Tools

2	3	4	5	6	7	8	9	10	11	12
MK20	MK21	MK3SP	MK3PNSP2	EVO7	MK7HT	MK7P	MK6	MK9	MK9HT	MK9P

For more information on toolings please refer to the Application Tooling chapter.

Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Aluminium-alloy	AL	-40 °C to +180 °C	Natural (NA)		- Corrosion resistant - Antimagnetic	RoHS
Chloroprene	CR	-20 °C to +80 °C	Black (BK)		- Weather-resistant - High yield strength	RoHS
Ethylene Tetrafluoroethylene	E/TFE	-80 °C to +170 °C	Blue (BU)	UL94 V0	- Resistance to radioactivity - UV-resistant, not moisture sensitive - Good chemical resistance to: acids, bases, oxidizing agents	RoHS
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL94 HB	- Limited brittleness sensitivity - Flexible at low temperature - Not moisture sensitive - Robust on impacts	RoHS
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	- Bio-plastic, derived from vegetable oil - Strong impact resistance at low temperature - Very low moisture absorption - Weather-resistant - Good chemical resistance	HF RoHS
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	- Good chemical resistance to: acids, bases, oxidizing agents - UV-resistant	HF RoHS
Polyamide 4.6	PA46	-40 °C to +150 °C (5000 h), +195 °C (500 h)	Natural (NA), Grey (GY)	UL94 V2	- Resistance to high temperatures - Very moisture sensitive - Low smoke sensitive	HF LFH RoHS
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL94 V2	High yield strength	RoHS
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL94 HB	- Limited brittleness sensitivity - Higher flexibility at low temperature	RoHS
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL94 V2	High yield strength	HF RoHS
Polyamide 6.6, glass-fibre reinforced	PA66GF13, PA66GF15	-40 °C to +105 °C	Black (BK)	UL94 HB	Good resistance to: lubricants, vehicle fuel, salt water and many solvents	HF RoHS
Polyamide 6.6, heat and UV stabilised	PA66HSW	-40 °C to +105 °C	Black (BK)	UL94 V2	- High yield strength - Modified elevated max. temperature - UV-resistant	HF RoHS
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL94 V2	- High yield strength - Modified elevated max. temperature	HF RoHS
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	- Limited brittleness sensitivity - Higher flexibility at low temperature	RoHS
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSW	-40 °C to +110 °C	Black (BK)	UL94 HB	- Limited brittleness sensitivity - Higher flexibility at low temperature - Modified elevated max. temperature - High yield strength, UV-resistant	HF RoHS
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL94 HB	- Limited brittleness sensitivity - Higher flexibility at low temperature - Modified elevated max. temperature	RoHS
Polyamide 6.6, high impact modified, scan black	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	- Limited brittleness sensitivity - Higher flexibility at low temperature	HF RoHS
Polyamide 6.6, UV-resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL94 V2	- High yield strength - UV-resistant	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. **More colours on request.

In addition to Tefzel® from DuPont HellermannTyton is also using equivalent E/TFE raw material from other suppliers.

*These details are only rough guide values. They should not be regarded as a material specification and are no substitute for a suitability test. Please see our datasheets for further details.

HF = Halogenfree

LFH = Limited Fire Hazard

RoHS = Restriction of Hazardous Substances



= Minimum Loop Tensile Strength
for Cable Ties (Newton)

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Polyamide 6.6, with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL94 HB	- High yield strength - Metal and X-Ray detectable	HF RoHS
Polyamide 6.6 V0	PA66V0	-40 °C to +85 °C	White (WH)	UL94 V0	- High yield strength - Low smoke emission	HF LFH RoHS
Polyamide 6.6 V0, High Oxygen Index	PA66V0-HOI	-40 °C to +85 °C, (+105 °C, 500 h)	White (WH)	UL94 V0	- High yield strength - Low smoke emissions	HF LFH RoHS
Polyester	SP	-50 °C to +150 °C	Black (BK)	Halogen free	- UV-resistant - Good chemical resistance to: most acids, alkalis and oils	HF LFH RoHS
Polyetheretherketone	PEEK	-55 °C to +240 °C	Beige (BGE)	UL94 V0	- Resistance to radioactivity - Not moisture sensitive - Good chemical resistance to: acids, bases, oxidizing agents	HF LFH RoHS
Polyethylene	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL94 HB	- Low moisture absorption - Good chemical resistance to: most acids, alcohol and oils	HF RoHS
Polyolefin	PO	-40 °C to +90 °C	Black (BK)	UL94 V0	Low smoke emissions	HF LFH RoHS
Polypropylene	PP	-40 °C to +115 °C	Black (BK), Natural (NA)	UL94 HB	- Floats in water - Moderate yield strength - Good chemical resistance to: organic acids	HF RoHS
Polypropylene, Ethylene- Propylene-Dien- Terpolymere-rubber free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL94 HB	- Good resistance to high temperatures - Good chemical and abrasion resistance	HF RoHS
Polypropylene with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL94 HB	- Floats in certain liquids - Metal and X-Ray detectable - Heat resistant - Moderate yield strength - Good chemical resistance	RoHS
Polyvinylchloride	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL94 V0	- Low moisture absorption - Good chemical resistance to: acids, ethanol and oil	RoHS
Stainless Steel, Stainless Steel	SS304, SS316	-80 °C to +538 °C	Natural (NA)	Non burning	- Corrosion resistant - Antimagnetic - Weather resistant - Outstanding chemical resistance	HF LFH RoHS
Thermoplastic Polyurethane	TPU	-40 °C to +85 °C	Black (BK)	UL94 HB	- High elasticity - Good chemical resistance to: acids, bases and oxidizing agents	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton is also using equivalent E/TFE raw material from other suppliers.

*These details are only rough guide values. They should not be regarded as a material specification and are no substitute for a suitability test. Please see our datasheets for further details.

**More colours on request.



= Minimum Loop Tensile Strength
for Cable Ties (Newton)

HF = Halogenfree
LFH = Limited Fire Hazard
RoHS = Restriction of Hazardous Substances