




HelaTape Power - Self-amalgamating Tapes

HelaTape Power 900 -

Self-amalgamating Extra High Voltage Tape

Features and Benefits

- Ethylene rubber-based, high-voltage tape
- Superior electrical, chemical, mechanical and thermal properties
- Fuses quickly for void-free, electrically stable layering
- Insulating and jacketing splices on power cables from 600 volts up to 138 kV
- Building stress cones and termination jackets for cables up to 35 kV
- Outstanding corona, ozone, chemical and corrosion resistance
- Withstands UV and cable impregnants

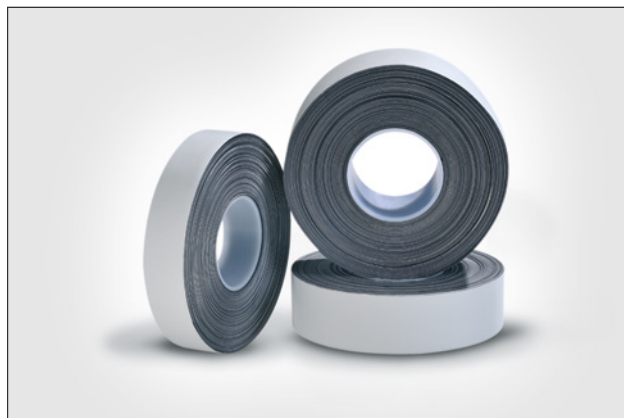

HelaTape Power 900 - For insulating and jacketing splices on power cables from 600 volts up to 138 kV.

MATERIAL	Ethylene Propylene Rubber (EPR)
Operating Temperature	+90 °C
Intermittent Operating Temperature	+130 °C
Water Absorption	0.02 %
Tensile Strength	3.5 MPa
Elongation at break	880 %
Volume Resistance	10 ¹⁶ Ω cm
Dielectric Strength	38 kV/mm

HF ✓

RoHS ✓

TYPE	Thickness (T)	Width (W)	Length (L)	Colour	Article-No.
HTAPE-POWER900	0.51	19.0	9.1 m	Black (BK)	711-00500
	0.51	25.0	9.1 m	Black (BK)	711-00501
	0.51	38.0	9.1 m	Black (BK)	711-00502

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.