
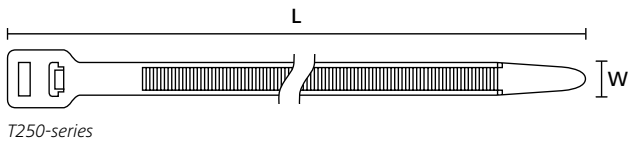


Cable Ties for outdoor use (UV-resistant)

T-Series in PA66W black



TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Material	Colour	Pack Cont.	Tools	Article-No.
T80L	4.7	390.0	110.0	355	PA66W	Black (BK)	100 pcs.	2;4-6,10-12	111-05460
T120S	7.6	225.0	55.0	535	PA66W	Black (BK)	50 pcs.	3,10-12	111-12830
T120I	7.6	300.0	80.0	535	PA66W	Black (BK)	100 pcs.	3,10-12	111-12160
T150R(H)	7.6	365.0	100.0	670	PA66W	Black (BK)	100 pcs.	3,10-12	111-14860
T120R(E)	7.6	387.0	100.0	535	PA66W	Black (BK)	100 pcs.	3,10-12	111-12060
T120M	7.6	460.0	125.0	535	PA66W	Black (BK)	100 pcs.	3,10-12	111-12660
T120L	7.6	760.0	225.0	535	PA66W	Black (BK)	50 pcs.	3,10-12	111-12430
T150L	8.8	820.0	245.0	780	PA66W	Black (BK)	25 pcs.	10-12	111-15460
T150M	8.9	530.0	150.0	780	PA66W	Black (BK)	25 pcs.	10-12	111-15660
T150XL	8.9	1,095.0	330.0	780	PA66W	Black (BK)	25 pcs.	10-12	111-15502
T150XLL	8.9	1,325.0	405.0	780	PA66W	Black (BK)	25 pcs.	10-12	111-15305
T250X	12.5	370.0	100.0	1115	PA66W	Black (BK)	25 pcs.	110-12	111-25100
T250R	12.5	515.0	125.0	1,115	PA66HIRHSUV	Black (BK)	25 pcs.	11-12	111-24805

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.

Recommended Tools								
	2	3	4	5	6	10	11	12
	MK20	MK21	MK3SP	MK3PNSP2	EVO7	EVO9	EVO9HT	MK9P
	595	596	596	596	598	599	599	602

For more information on toolings please refer to the Application Tooling chapter.



For product specific approvals and specifications please refer to the Appendix.