



Double wrap cable ties with ball-lock

MBTXHD- / MBTUHD-Series, stainless steel 316

The double wrap ties of the MBT-series are used in applications where a fixing requires an extraordinary high tensile strength.

Features and benefits

- Stainless steel MBT ties with double wrap operation
- Wraps around the bundle and passes through the head twice
- Very high tensile strength to carry enormous applied loads
- Head with two locking balls
- Resistant to arduous conditions and environments





Can support quality assurance in the production of food stuffs, for example HACCP.



Material specification please see page 23.



Double wrap stainless steel cable ties, uncoated, MBT_UHD.

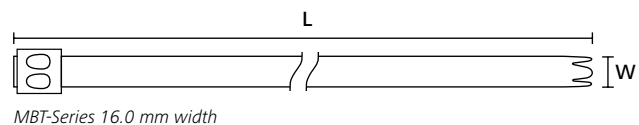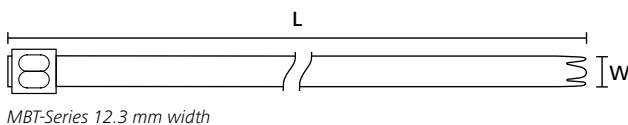

TYPE	Width (W)	Length (L)	Bundle Ø min.	Bundle Ø max.	N	Material	Pack Cont.	Tools	Article-No.
MBT27XHD	12.3	681.0	17.0	100.0	5,000	SS316	50 pcs.	15-18	111-01307
MBT33XHD	12.3	838.0	17.0	120.0	5,000	SS316	50 pcs.	15-18	111-01308
MBT43XHD	12.3	1,092.0	17.0	160.0	5,000	SS316	25 pcs.	15-18	111-01309
MBT49XHD	12.3	1,245.0	17.0	180.0	5,000	SS316	25 pcs.	15-18	111-01310
MBT60XHD	12.3	1,524.0	17.0	230.0	5,000	SS316	25 pcs.	15-18	111-01311
MBT27UHD	16.0	681.0	25.0	100.0	7,000	SS316	50 pcs.	15;17	111-01312
MBT33UHD	16.0	838.0	25.0	120.0	7,000	SS316	50 pcs.	15;17	111-01313
MBT43UHD	16.0	1,092.0	25.0	160.0	7,000	SS316	25 pcs.	15;17	111-01314
MBT49UHD	16.0	1,245.0	25.0	180.0	7,000	SS316	25 pcs.	15;17	111-01315
MBT60UHD	16.0	1,524.0	25.0	230.0	7,000	SS316	25 pcs.	15;17	111-01316

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.

Recommended Tools				
	15	16	17	18
	MK9SST	MK9PSST	HDT16	KST-STG200
	604	604	605	605

For more information on toolings please refer to the Application Tooling chapter.