

### 2-Piece Fixing Ties with Arrowhead, with Disc

For temperatures up to +240 °C

Primarily designed for fixing cable harnesses in the automotive industry, their simplicity and ease of use has resulted in these parts being used in other industries, for example aviation, switch gear and white goods manufacturing.

#### Features and benefits

- Pre-assembled 2-piece fixing tie with arrowhead foot part
- Cable tie head can be moved after bundling
- Easy to assemble without the need for a tool
- Arrowhead simply locks into place
- Disc adjusts tie for pressure from various directions and minimises access of dust, dirt and water
- Features Material PEEK
- -55 °C to +240 °C operating temperature
- Excellent resistance against chemicals and gamma radiation




PEEK Fixing Ties can be used for small diameters from 1.0 mm.




One Step to the Web!



Please find more PEEK products for your system solutions: PEEK Ties, see page 65. Screw Mount CTAM, see page 151.

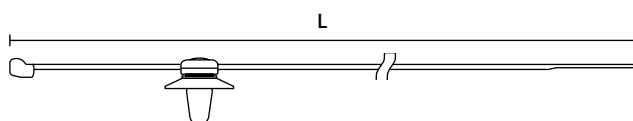

PT2AP1SFT6.5

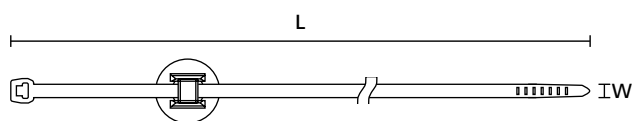

PT2AP1SFT6.5

| TYPE           | Width (W) | Length (L) | Bundle Ø max. | N   | Disc Ø | Hole Ø (FH) | Panel Thickness | Material   | Colour                 | Tools | Article-No. |
|----------------|-----------|------------|---------------|-----|--------|-------------|-----------------|------------|------------------------|-------|-------------|
| T50ROSP1SFT6.5 | 4.6       | 200.0      | 45.0          | 225 | 16.0   | 6.3 - 6.7   | 0.7 - 1.3       | PA46, PEEK | Grey (GY), Beige (BGE) | 2;4-8 | 156-00455   |
| T50ROSP2SFT6.5 | 4.6       | 200.0      | 45.0          | 225 | 16.0   | 6.3 - 6.7   | 1.7 - 2.3       | PA46, PEEK | Grey (GY), Beige (BGE) | 2;4-8 | 156-00456   |
| PT2AP1SFT6.5   | 3.4       | 145.0      | 35.0          | 230 | 16.0   | 6.3 - 6.7   | 0.7 - 1.3       | PEEK       | Beige (BGE)            | 2;4-6 | 156-01090   |
| PT2AP2SFT6.5   | 3.4       | 145.0      | 35.0          | 230 | 16.0   | 6.3 - 6.7   | 1.7 - 2.3       | PEEK       | Beige (BGE)            | 2;4-6 | 156-01091   |
| PT2AP3SFT6.5   | 3.4       | 145.0      | 32.0          | 230 | 16.0   | 6.3 - 6.7   | 1.2 - 1.8       | PEEK       | Beige (BGE)            | 2;4-6 | 156-01146   |

All dimensions in mm. Subject to technical changes.

| Recommended Tools |      |       |          |      |      |
|-------------------|------|-------|----------|------|------|
|                   | 2    | 4     | 5        | 6    | 8    |
|                   | MK20 | MK3SP | MK3PNSP2 | EVO7 | MK7P |
|                   | 595  | 595   | 596      | 598  | 601  |

For more information on toolings please refer to the Application Tooling chapter.