





2-Piece Fixing Ties with Fir Tree, with Disc, for Round Holes

Fir Tree Parts FT7 - FT10

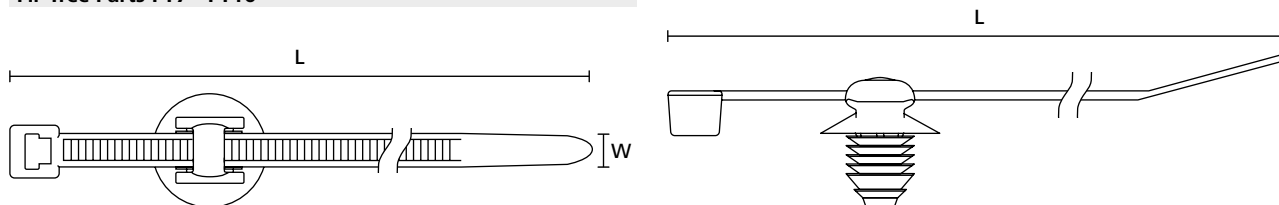


T50RFT8GSD


T50RFT8GSD




T50IFT7




T50RFT8



T50RFT8GSD



T120IFT9



T50RFT10



Material specification
please see page 22.

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
V150RFT10	3.3	150.0	35.0	150	18	9.7 - 10.0	0.8 - 5.0	PA66	PA66HS	Black (BK)	2;4-6	156-01233
T30RFT7	3.5	150.0	35.0	135	16	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66HS	Black (BK)	2;4-6;8	156-00057
	3.5	150.0	35.0	135	16	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66	Black (BK)	2;4-6;8	156-01476
T30RFT8	3.5	150.0	35.0	135	16	7.7 - 8.0	0.8 - 6.0	PA66HS	PA66HS	Black (BK)	2;4-6;8	156-00058
T30RFT10	2.5	150.0	31.0	135	18	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2;4-6;8	156-00062
T40RFT8GSD	4.0	180.0	40.0	180	16	8.0 - 8.5	1.5 - 4.0	PA66HS	PA66HIRHS	Black (BK)	2;4-8	156-00104
T50RFT7	4.6	200.0	44.0	225	16	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66HS	Black (BK)	2-10	111-85871
T50RFT8	4.6	202.0	44.0	225	16	7.7 - 8.0	0.8 - 6.0	PA66HIRHS	PA66HIRHS	Black (BK)	2-10	156-00158
T50RFT10	4.6	202.0	45.0	225	18	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2-10	156-00523
T50ROSFT7	4.6	200.0	45.0	225	16	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66HS	Black (BK)	2-10	156-01056
T50ROSFT10	4.6	200.0	45.0	225	18	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2-10	156-00120
T50RFT7	4.6	202.0	45.0	225	16	6.5 - 7.0	0.8 - 7.0	PA66HSW	PA66HS	Black (BK)	2-10	156-00587
	4.6	202.0	45.0	225	16	6.5 - 7.0	0.8 - 7.0	PA46	PA66HS	Natural (NA)	2-10	156-00465
T50RFT8GSD	4.6	200.0	45.0	225	16	8.0 - 8.5	1.5 - 4.0	PA66HS	PA66HIRHS	Black (BK)	2-10	133-00034
	4.6	200.0	45.0	225	16	8.0 - 8.5	1.5 - 4.0	PA46	PA46	Grey (GY)	2-10	156-00235
T50SFT7	4.6	160.0	35.0	225	16	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66HS	Black (BK)	2-10	156-00056
T50SFT10	4.6	160.0	31.0	225	18	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2-10	156-00063
T50IFT8	4.6	305.0	81.0	225	16	7.7 - 8.0	0.8 - 6.0	PA66HS	PA66HS	Black (BK)	2-10	150-00060
T50IFT10	4.6	305.0	81.0	225	18	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2-10	156-00064
T50LFT7	4.6	390.0	110.0	225	16	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66HS	Black (BK)	2-10	156-00055
T50LFT8	4.6	390.0	110.0	225	16	7.7 - 8.0	0.8 - 6.0	PA66HS	PA66HS	Black (BK)	2-10	156-00061
T50LFT10	4.6	390.0	106.0	225	18	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2-10	156-00065
T150RFT9	7.6	365.0	100.0	670	20	9.0 - 10.6	5.0 - 11.0	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00845
T150RFT9B	7.6	365.0	100.0	670	21.6	8.75 - 9.25	1.0 - 15.8	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00985

All dimensions in mm. Subject to technical changes.

Recommended Tools											
	2	3	4	5	6	8	9	10	11	12	15
	MK20	MK21	MK3SP	MK3PNSP2	EVO7	MK7P	MK6	EVO9	EVO9HT	MK9P	MK9SST
	595	595	596	596	598	601	600	599	599	602	560

For more information on toolings please refer to the Application Tooling chapter.