


High Torque Mounts (metal bushing)

TYPE	Drawing	Width (W)	Length (L)	Height (H)	Hole Ø (FH)	Strap Width max. (G)	Material	Colour	Pack Cont.	Article-No.
HDM400BR		25.0	47.0	20.7	10,29	12.7	PA66HIRHSUV	Black (BK)	500	151-01224

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.

Two Way Saddle Mount for heavy duty applications, for parallel separation


Heavy duty saddle mounts can be installed between two bundles to separate them and prevent chafing and wear. Fastened to a frame rail or mounting bracket, the special profile on the saddle mount provides a tight circumferential loop on large and small bundles. The saddle mount is an ideal assistant in many applications within the railway, truck and agricultural vehicle construction as well as in the ship building industry.

Features and benefits

- For parallel routing of different bundles to avoid wear and chafing
- Offers secure alignment to the bundle
- Can be used in combination with heavy duty cable ties
- Easy maintenance of bundle by simply changing the cable tie
- Made from impact modified, heat stabilized material



This saddle mount is installed between two bundles to separate them and prevent chafing and wear.

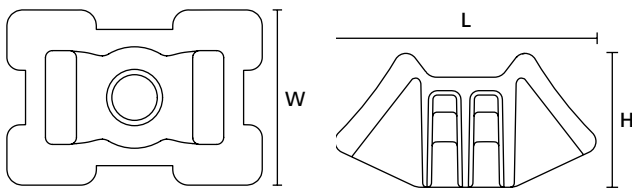

S2CM25

TYPE	Width (W)	Length (L)	Height (H)	Hole Ø (FH)	Strap Width max. (G)	Bundle Ø max.	Material	Colour	Pack Cont.	Article-No.
S2CM25	30.0	45.0	23.0	6.0	12.5	89.0	PA66HIRHS	Grey (GY)	500 pcs.	151-29400
S2HM25	30.0	45.0	23.0	6.0	13.5	89.0	PA66HIRHSW	Black (BK)	500 pcs.	151-29403

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content. Other packaging options may also be available.