



Heat shrinkable tubing up to 3.5:1 - 1 m lengths

TREDUX HA47 - thick wall adhesive lined

The toughness and the weatherability make TREDUX thick wall tubing suitable for exposed applications and underground cable joints.

Features and benefits

- Thick wall polyolefin adhesive-lined tubing
- 1 m shrink tubing lengths delivered in handy display carton
- All tubes can be sold in single 1 meter length or entire box



TREDUX HA47 - application below ground.




One Step to the Web!

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	up to 3.5:1
Operating Temperature	-55 °C to +110 °C
Min. Shrink Temperature	+120 °C
Softening Point Adhesive	+85 °C
Longitudinal change after shrinkage	-10 % max.
Dielectric Strength	20 kV/mm
Flammability	not flame retarded

HF ✓

RoHS ✓

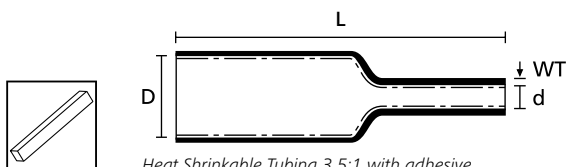

Heat Shrinkable Tubing 3.5:1 with adhesive

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Pack Cont.	Colour	Tools	Article-No.
TREDUX-HA47-19/6	19.0	6.0	2.70	1.0 m	10 pcs.	Black (BK)	30-32	321-50190
TREDUX-HA47-33/8	33.0	8.0	3.20	1.0 m	5 pcs.	Black (BK)	30-32	321-50330
TREDUX-HA47-45/12	45.0	12.0	4.10	1.0 m	4 pcs.	Black (BK)	-	321-50450
TREDUX-HA47-51/16	51.0	16.0	4.10	1.0 m	2 pcs.	Black (BK)	-	321-50510
TREDUX-HA47-68/22	68.0	22.0	4.10	1.0 m	1 pc.	Black (BK)	-	321-50680
TREDUX-HA47-85/25	85.0	25.4	4.30	1.0 m	1 pc.	Black (BK)	-	321-50850

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.

Recommended Tools			
	30	31	32
	H5002	H5004	E4500
	611	611	610

For more information on toolings please refer to the Application Tooling chapter.