



Heat shrinkable tubing 2:1 - flexible and transparent

TFN24


Protects wire and cable markers subject to abuse, while permitting inspectability of each item covered. Protects electronic components while permitting their identification and inspection.

Features and benefits

- Transparent, flexible polyolefin tubing
- Protects identification marking perfect
- Halogen free
- Good mechanical and chemical resistance
- VG-approval and additional industrial approvals



Cut lengths available on request. Please contact us!

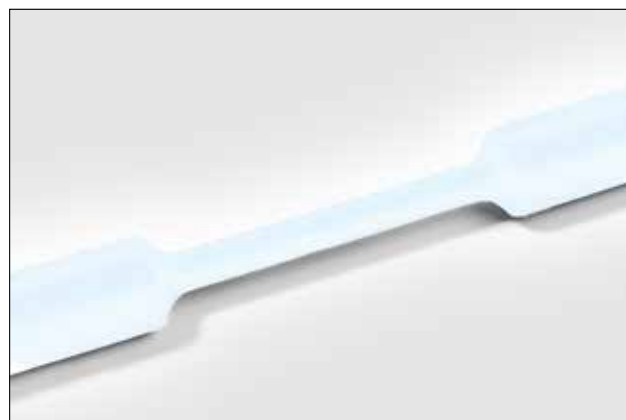

TFN24 transparent tubing with 2:1 shrink ratio.

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	2:1
Operating Temperature	-55 °C to +135 °C
Min. Shrink Temperature	+100 °C
Longitudinal change after shrinkage	+/-5 % max.
Dielectric Strength	20 kV/mm
Flammability	not flame retarded

HF ✓

RoHS ✓



Heat Shrinkable Tubing 2:1

TYPE	Supplied Ø D min.	Size (imperial)	Recov. Ø d max.	Wall (WT)	Reel Length	Colour	Designation as per VG-Norm	Tools	Article-No.
TFN24-1.2/0.6	1.2	3/64 "	0.6	0.40	300 m	Transparent (CL)	VG 95343 T05 B 001 M	30-32	309-60000
TFN24-1.6/0.8	1.6	1/16 "	0.8	0.40	300 m	Transparent (CL)	VG 95343 T05 B 002 M	30-32	309-60010
TFN24-2.4/1.2	2.4	3/32 "	1.2	0.48	300 m	Transparent (CL)	VG 95343 T05 B 003 M	30-32	309-60020
TFN24-3.2/1.6	3.2	1/8 "	1.6	0.48	300 m	Transparent (CL)	VG 95343 T05 B 004 M	30-32	309-60030
TFN24-4.8/2.4	4.8	3/16 "	2.4	0.48	300 m	Transparent (CL)	VG 95343 T05 B 005 M	30-32	309-60040
TFN24-6.4/3.2	6.4	1/4 "	3.2	0.56	300 m	Transparent (CL)	VG 95343 T05 B 006 M	30-32	309-60050
TFN24-9.5/4.8	9.5	3/8 "	4.7	0.62	150 m	Transparent (CL)	VG 95343 T05 B 007 M	30-32	309-60060
TFN24-12.7/6.4	12.7	1/2 "	6.4	0.68	100 m	Transparent (CL)	VG 95343 T05 B 008 M	30-32	309-60070
TFN24-19.1/9.5	19.0	3/4 "	9.5	0.68	60 m	Transparent (CL)	VG 95343 T05 B 009 M	30-32	309-60080
TFN24-25.4/12.7	25.4	1 "	12.7	0.87	60 m	Transparent (CL)	VG 95343 T05 B 010 M	30-32	309-60090
TFN24-38.1/19.1	38.1	1-1/2 "	19.1	1.00	30 m	Transparent (CL)	VG 95343 T05 B 011 M	30-32	309-60095

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.