



Hot Melt Tape for Heat Shrinkable Tubing and Shapes

HMT200A

Designed for use with heat shrink sleeving and mouldings.

Features and Benefits


- Hot melt tape flows when heated to seal against moisture
- For heat shrink tubing and mouldings



HMT200A-Tape.



Adhesive tape HMT200A for sealing against humidity.

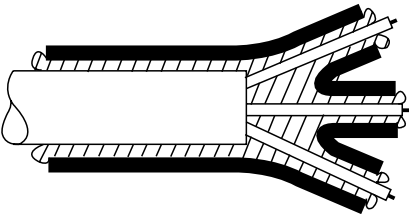

HMT200A

MATERIAL	Ethylenevinylacetate (EVA)
Operating Temperature	-55 °C to +105 °C

HF ✓

RoHS ✓

TYPE	Thickness (T)	Width (W)	Colour	Reel Length	Article-No.
HMT200A	0.25	25.0	Translucent (TT)	10 m	354-02260
	0.25	25.0	Translucent (TT)	50 m	354-02259

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



For product specific approvals and specifications please refer to the Appendix.