



PTFE spiral binding

SBPTFE


SBPTFE is recommended wherever superior protection against chemical and extreme temperatures are important.

Features and benefits

- Organises and protects cables and hoses
- Excellent fire protection
- Self-extinguishing according to UL94 V0
- Suitable for retro-fitting
- Cables branch out at any point
- Wide range of diameters and colours



Spiral binding SBTFE is ideal for extreme conditions.

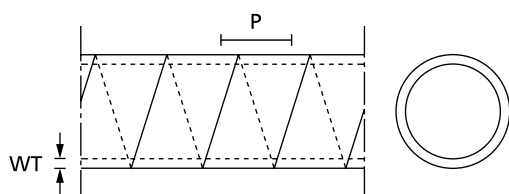

Spiral binding

MATERIAL	Polytetrafluoroethylene (PTFE)
Operating Temperature	-60 °C to +260 °C, intermittent +350 °C
Flammability	UL94 V0

RoHS ✓

TYPE	Nominal Ø	Wall (WT)	Pitch (P)	Bundle Ø min.	Bundle Ø max.	Colour	Reel Length	Article-No.
SBPTFE1.5	1.5	0.5	6.0	1.6	8	Natural (NA)	5 m	161-45000
SBPTFE4	4	0.7	7.8	5	20	Natural (NA)	5 m	161-45100
SBPTFE9	9	1.0	12.5	10	100	Natural (NA)	5 m	161-45200

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.