


### For mounting to duct fingers

#### HelaDuct HTWD-NFWR and HTWD-WFWR Wire Retainers

HTWD-NFWR for the HTWD-PN ducts and HTWD-WFWR for HTWD-PW ducts are easily inserted onto fingers and hold wires securely into place when cover is removed.

#### Features and benefits

- Prevents wires from falling out even when vertical routed
- Easily inserted onto single fingers of duct
- Height can be freely adjusted
- Does not block insertion of wirings into slots
- One retainer for all duct widths: length of retainer can be shortened at break-off points to duct width
- HTWD-NFWR for HTWD-PN ducts, HTWD-WFWR for HTWD-PW ducts

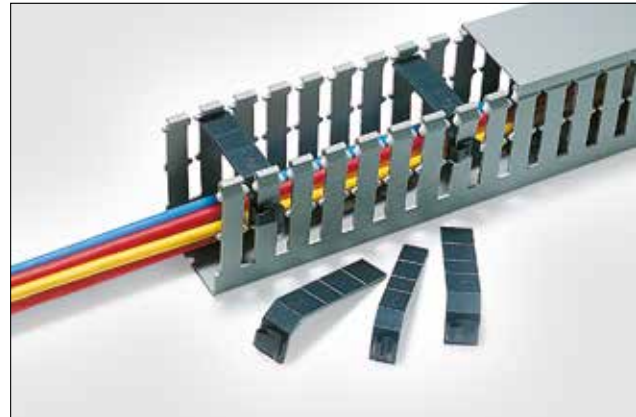


HTWD-NFWR and HTWD-WFWR hold wires in place even when cover is removed.

<b>MATERIAL</b>	Acrylonitrile Butadiene Styrene (ABS)
<b>Operating Temperature</b>	-40 °C to +80 °C
<b>Flammability</b>	UL94 V0

HF ✓

RoHS ✓

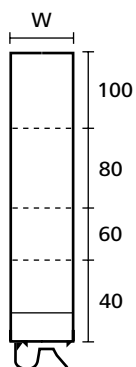

HTWD-NFWR, -WFWR

TYPE	For Wiring Ducts	Width (W)	Colour	Pack Cont.	Article-No.
HTWD-NFWR	HTWD-PN	14	Black (BK)	100 pcs.	181-10020
HTWD-WFWR	HTWD-PW	18	Black (BK)	100 pcs.	181-10010

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.