Parallel branch joint house connections

RELICON PAH-3

The parallel branch joint PAH is a universal straight-through and branch joint. Depending on the connector, it can be used for single and double branches. They are suitable for jointing on polymeric cables and wires made of PVC, XLPE, PE, EPR and utility cables.
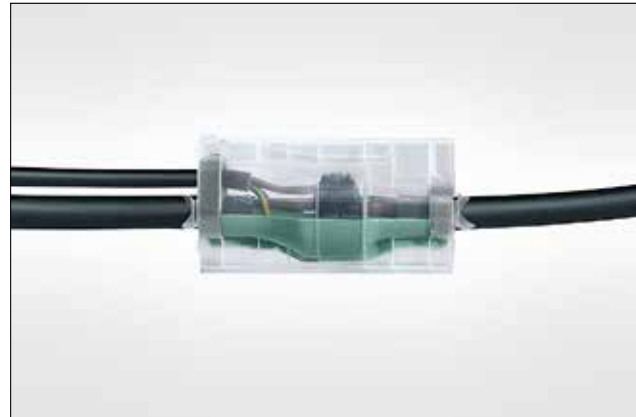
Application: In low-voltage electrical networks as branch joint for building connections. Underground, submerged, outdoor, indoor.

Features and Benefits

• Impact-proof, transparent moulding shell
• Compact, optimized dimensions
• Longitudinally and transversely watertight
• SF-system
• Joint can be cast under influence of water
• Immediately ready for use
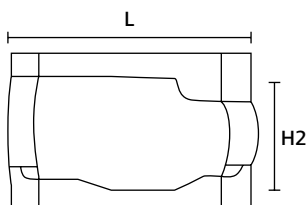• Suitable for all compact tap connectors

Content of Set / Kit

• Cast resin PUR 33, 2800 ml/3836 g
• In a two-chamber pouch or in cans
• Transparent moulding shell
• Foam seal, protective gloves, emery cloth
• Cleaning cloth, cable kit, installation instructions
• SF-nozzle (two-chamber pouch)
• Mixing stick (can)

Parallel branch joint PAH-3 135/360, house connector set.

MATERIAL	Polyurethane resin 33 (PUR33)
Colour	Green (GN)
Operating Temperature	-25 °C to +120 °C
Storage Temperature	+4 °C to +40 °C
Shelf Life	48 months

RoHS ✓

PAH-3

TYPE	Ø Main Cable	Main Cable mm² min - max		Ø Branch Cable	Branch Cable mm² min - max		Length (L)	Height (H2)	Connector	Pack	Article-No.
PAH-3-135/360-C-S	27-49	4 x 35	4 x 70	15-33	4 x 6	4 x 95	360.0	135.0	Isicompact-S	Can	435-00169
PAH-3-135/360-B-SF-S	27-49	4 x 35	4 x 95	15-33	4 x 6	4 x 70	360.0	135.0	Isicompact-S	Bag	435-00175
PAH-3-135/360-B-SF	27-49	4 x 35	4 x 185	15-33	4 x 6	4 x 70	360.0	135.0	none	Bag	435-00155
PAH-3-135/360-C	27-49	4 x 35	4 x 185	15-33	4 x 6	4 x 70	360.0	135.0	none	Can	435-00161
PAH-3-135/360-C-M	27-49	4 x 35	4 x 185	15-33	4 x 6	4 x 70	360.0	135.0	Isicompact-M	Can	435-00166
PAH-3-135/360-B-SF-M	27-49	4 x 35	4 x 185	15-33	4 x 6	4 x 70	360.0	135.0	Isicompact-M	Bag	435-00172

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.