



## Shrinkable markers "Ladder Style", thermal transfer

### TULT DS - 3:1 Military and Electronics



TULT DS is a UL recognised 3:1 heat shrink marker material pre-cut and formatted into a convenient "ladder" system. This pre-cut format not only allows printing on both sides of the marker but the user can also easily choose and pick each required marker. TULT's polyolefin compound has good mechanical strength and resistance to organic solvents and chemicals. The surface of the tubing has been especially prepared so that print performance is excellent at all times using HellermannTyton's printer range.

#### Features and benefits

- Shrink ratio 3:1
- 50 mm, 25 mm and 16 mm pre-cut marker options as standard, other lengths available on request
- Available in white or yellow
- Good mechanical strength and resistance to organic solvents and chemicals
- Highly flexible
- Delivery in convenient storage boxes



One Step to the Web!

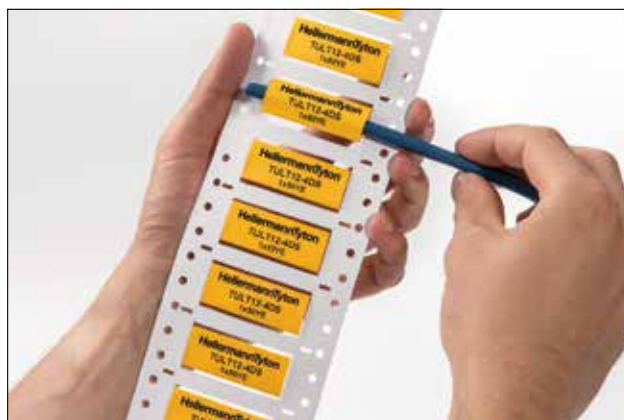

Shrinkable markers TULT DS for military and electronics industry.

<b>MATERIAL</b>	Polyolefin, cross-linked (PO-X)
<b>Operating Temperature</b>	-55 °C to +135 °C
<b>Min. Shrink Temperature</b>	+90 °C
<b>Shrink Ratio</b>	3:1
<b>Recommended Ribbon Type</b>	TTDTHOUT
<b>Thermal Transfer Printer</b>	TT430, TT4030, TRAKMARK DS

RoHS



For size matrix please refer to page 475.

TYPE	Supplied Ø D min.	Recov. Ø d max.	Length (L)	Wall (WT)	Pack Cont.	Colour	Article-No.
TULT2.4-0.8DS-2x25WH	2.4	0.8	25.0	0.73	2,000 pcs.	White (WH)	553-71002
TULT2.4-0.8DS-2x25YE	2.4	0.8	25.0	0.73	2,000 pcs.	Yellow (YE)	553-71003
TULT2.4-0.8DS-1x50WH	2.4	0.8	50.0	0.73	1,000 pcs.	White (WH)	553-71000
TULT2.4-0.8DS-1x50YE	2.4	0.8	50.0	0.73	1,000 pcs.	Yellow (YE)	553-71001
TULT3-1DS-2x25WH	3.0	1.0	25.0	0.60	2,000 pcs.	White (WH)	553-71008
TULT3-1DS-2x25YE	3.0	1.0	25.0	0.60	2,000 pcs.	Yellow (YE)	553-71009
TULT3-1DS-1x50WH	3.0	1.0	50.0	0.60	1,000 pcs.	White (WH)	553-71006
TULT3-1DS-1x50YE	3.0	1.0	50.0	0.60	1,000 pcs.	Yellow (YE)	553-71007

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.



For product specific approvals and specifications please refer to the Appendix.