




## Flexible cable support

HelaDuct Flex are used to route cables where bending and twisting are common and cables need to be monitored, particularly in the door area.

### Features and benefits

- Very flexible, can be bent and twisted
- Cables easily and safely inserted
- Keeps cables open to view
- Rapidly mounted with adhesive strip or screws with high-quality foam bonding layer
- Can be clicked together end-to-end to create longer lengths

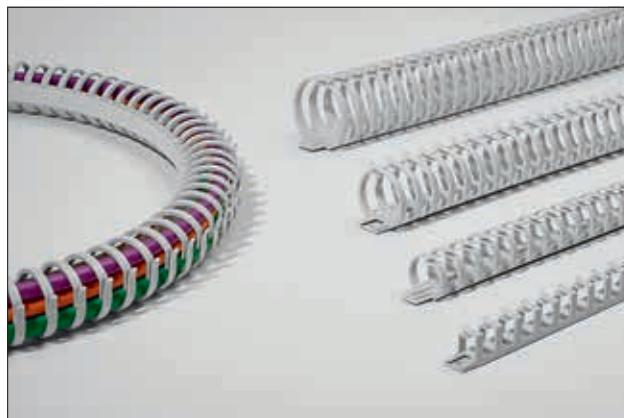

*HelaDuct HTWD-Flex is strong, flexible and easy to mount.*

<b>MATERIAL</b>	Polyamide 6 (PA6)
<b>Operating Temperature</b>	-25 °C to +90 °C, intermittent +100 °C
<b>Flammability</b>	UL 94 V0



### HelaDuct Flex Screw Mounting

TYPE	Nominal Ø	Fixation Method	No. of Wires		Colour	Length (L)	Pack Cont.	Article-No.
HTWD-FLEX-10	10	Screw Mounting	8 x 1.50 mm <sup>2</sup>	5 x 2.50 mm <sup>2</sup>	White (WH)	250	40 pcs.	164-40010
HTWD-FLEX-20	20	Screw Mounting	18 x 1.50 mm <sup>2</sup>	13 x 2.50 mm <sup>2</sup>	White (WH)	500	40 pcs.	164-40020
HTWD-FLEX-30	30	Screw Mounting	46 x 1.50 mm <sup>2</sup>	30 x 2.50 mm <sup>2</sup>	White (WH)	500	40 pcs.	164-40030
HTWD-FLEX-40	40	Screw Mounting	81 x 1.50 mm <sup>2</sup>	53 x 2.50 mm <sup>2</sup>	White (WH)	500	40 pcs.	164-40040

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.

### HelaDuct Flex Screw Mounting and Adhesive

<b>MATERIAL</b>	Polyamide 6 (PA6)
<b>Operating Temperature</b>	-25 °C to +90 °C, intermittent +100 °C
<b>Adhesive</b>	Acrylate with base of polyethylene foam
<b>Flammability</b>	UL 94 V0 (excluding adhesive)



TYPE	Nominal Ø	Fixation Method	No. of Wires		Colour	Length (L)	Pack Cont.	Article-No.
HTWD-FLEX-A-10	10	Screw Mounting and Adhesive	8 x 1.50 mm <sup>2</sup>	5 x 2.50 mm <sup>2</sup>	White (WH)	250	40 pcs.	164-40015
HTWD-FLEX-A-20	20	Screw Mounting and Adhesive	18 x 1.50 mm <sup>2</sup>	13 x 2.50 mm <sup>2</sup>	White (WH)	500	40 pcs.	164-40025
HTWD-FLEX-A-30	30	Screw Mounting and Adhesive	46 x 1.50 mm <sup>2</sup>	30 x 2.50 mm <sup>2</sup>	White (WH)	500	40 pcs.	164-40035
HTWD-FLEX-A-40	40	Screw Mounting and Adhesive	81 x 1.50 mm <sup>2</sup>	53 x 2.50 mm <sup>2</sup>	White (WH)	500	40 pcs.	164-40045

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.



For product specific approvals and specifications please refer to the Appendix.