


For mounting ducts to DIN rails

HelaDuct HTWD-RB Rail Mounting Blocks

HelaDuct HTWD-RB is used to fix wiring ducts firmly to DIN rail.

Features and benefits

- Easily snapped onto DIN rail
- Rapidly fixed to wiring duct with a HTWD-TL mount
- Assembly direction of wiring duct can be either parallel or perpendicular to DIN rail



HTWD-RB Rail Mounting Block



HTWD-RB rail mounting blocks und HTWD-TL for mounting ducts to DIN rails.

MATERIAL	Polyamide 6.6 (PA66)
Operating Temperature	-40 °C to +80 °C
Flammability	UL 94 V2



TYPE	Width (W)	Length (L)	Height (H)	Colour	Pack Cont.	Article-No.
HTWD-RB	50	50	14	Black (BK)	25 pcs.	181-45130

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.


For fastening mounting blocks to base of ducts

HelaDuct HTWD-TL mounting block fastener


The HTWD-TL is used to fix a HTWD-RB rail mounting block to duct or to fix smaller ducts inside larger ones.

Features and benefits

- Holds all components firmly in place
- Anchor of mount remains inside raised mounting point and does not protrude below surface of duct base

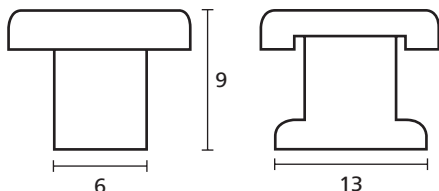

HTWD-TL Mount



HTWD-TL Mount

MATERIAL	Polyamide 6 (PA6)
Operating Temperature	-40 °C to +80 °C
Flammability	UL 94 V2



TYPE	For Wiring Ducts	Colour	Pack Cont.	Article-No.
HTWD-TL	HTWD-PN, HTWD-PW	White (WH)	100 pcs.	181-45019

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.