



Fittings, konvertere og koblinger

- HG-HG fitting, IP66

Egenskaber og fordele

- Kobling i et stykke
- Forbinder korrigerede slanger




HelaGuard HG-HG slangekobling.

MATERIALE	Polyamid 6.6 (PA66)
Driftstemperatur	-50 °C til +135 °C
Godkendelse	UL-godkendt

HF

RoHS

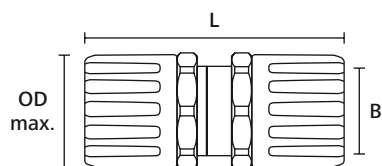

HelaGuard fittings, kobling

TYPE	For nominel diameter	Til nominel diameter	Min. hul størrelse (B)	Udvendig Ø max. (OD max.)	L (L)	Enhed	Farve	EAN	Bestillings- nr.
HG16-HG16	16	16	11,0	29	59	10 Stk.	Sort (BK)	4031026326405	166-24600
HG21-HG21	21	21	14,5	32	71	10 Stk.	Sort (BK)	4031026326412	166-24601
HG28-HG28	28	28	19,5	44	81	10 Stk.	Sort (BK)	4031026326429	166-24602
HG34-HG34	34	34	26,5	51	87	10 Stk.	Sort (BK)	4031026326436	166-24603

Alle dimensioner i mm. Der tages forbehold for tekniske ændringer.
Minimum ordre antal (MOQ) kan være forskellig fra emballageindhold.



For godkendelser se tillægsinformation bagerst i kataloget.