



Fittings for metallic conduits with plastic coating

PCS-SCG Straight Cable Gland fitting, IP65

External thread, nickel plated brass.

Fulfils IP65.

Features and benefits

- Multipart compression fitting including elastomeric seal
- Powerful strain relief function
- Seals cable at IP68 and IP69k
- Provides excellent tensile strength




PCS-SCG Compression Fitting with Strain Relief and Cable Seal.

MATERIAL	Polyamide 6.6 (PA66), Nickel Plated Brass (NPB), Thermoplastic Elastomer (TPE)
Operating Temperature	-50 °C to +135 °C

HF ✓

RoHS ✓

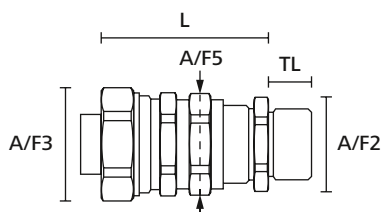

HelaGuard compression fitting, straight cable gland

TYPE	Nominal Ø	Thread Size	Suitable for Cable Ø from/to	Length (L)	A/F Thread (A/F2)	A/F Nut (A/F3)	A/F Gland Body (A/F5)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
PCS16-SCG-M16	16	M16	4.5 - 10	55	20	26	22	12.0	10 pcs.	Metal (ML)	166-36101
PCS20-SCG-M20	20	M20	7 - 13	58	24	29	26	12.0	10 pcs.	Metal (ML)	166-36102
PCS25-SCG-M25	25	M25	9 - 17	65	29	35	33	12.0	10 pcs.	Metal (ML)	166-36103
PCS32-SCG-M32	32	M32	11 - 21	78	36	42	40	15.0	2 pcs.	Metal (ML)	166-36104

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content.

To ensure the protective seal, it is recommended to use a thread sealant on the thread between the cable gland insert and the conduit fitting.