



### Fittings for metallic conduits with liquid-tight cover

#### LTS-SCG Straight cable gland fitting, IP68

External thread, nickel plated brass.

Fulfils IP66, IP67, IP68 and IP69k.

#### Features and benefits

- Multipart compression fitting including elastomeric seal
- Powerful strain relief function
- Seals cable at IP68 and IP69k
- Provides excellent tensile strength




LTS-SCG Compression Fitting with Strain Relief and Cable Seal.

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>MATERIAL</b>              | Polyamide 6.6 (PA66), Nickel Plated Brass (NPB), Thermoplastic Elastomer (TPE) |
| <b>Operating Temperature</b> | -50 °C to +135 °C                                                              |

HF ✓

RoHS ✓

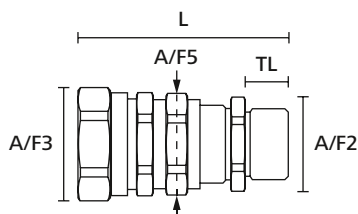

HeloGuard fitting, straight cable gland

| TYPE          | Nominal Ø | Thread Size | Suitable for Cable Ø from/to | Length (L) | A/F Thread (A/F2) | A/F Nut (A/F3) | A/F Gland Body (A/F5) | Thread Length (TL) | Pack Cont. | Colour     | Article-No. |
|---------------|-----------|-------------|------------------------------|------------|-------------------|----------------|-----------------------|--------------------|------------|------------|-------------|
| LTS16-SCG-M16 | 16        | M16         | 4.5 - 10                     | 55         | 20                | 26             | 22                    | 12.0               | 10 pcs.    | Metal (ML) | 166-36201   |
| LTS20-SCG-M20 | 20        | M20         | 7 - 13                       | 58         | 24                | 29             | 26                    | 12.0               | 10 pcs.    | Metal (ML) | 166-36202   |
| LTS25-SCG-M25 | 25        | M25         | 9 - 17                       | 65         | 29                | 35             | 33                    | 12.0               | 10 pcs.    | Metal (ML) | 166-36203   |
| LTS32-SCG-M32 | 32        | M32         | 11 - 21                      | 78         | 36                | 42             | 40                    | 15.0               | 2 pcs.     | Metal (ML) | 166-36204   |

All dimensions in mm. Subject to technical changes.

Minimum Order Quantity (MOQ) may differ from package content.

To ensure the protective seal, it is recommended to use a thread sealant on the thread between the cable gland insert and the conduit fitting.