

Fittings with swivel external thread

HGL-SM Straight fitting, IP68

Straight swivel brass external thread with conduit seal and washer.

Fulfils IP66, IP67, IP68 and IP69k.

Features and benefits

- One piece, fast fit
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus




HelaGuard HGL-SM Straight Swivel External Thread with conduit seal, IP68.

MATERIAL	Polyamide 6.6 (PA66), Nickel Plated Brass (NPB), Thermoplastic Elastomer (TPE)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

HF ✓

RoHS ✓

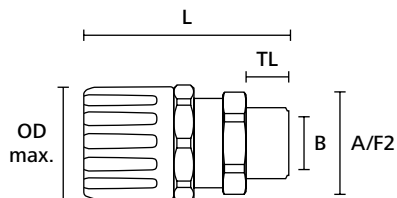

HelaGuard fitting, straight with swivel external thread

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	A/F Thread (A/F2)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
HGL13-SM-M16	13	M16	11.0	24	51	20	12	10 pcs.	Black (BK)	166-21900
HGL13-SM-PG9	13	PG9	11.0	24	49	22	10	10 pcs.	Black (BK)	166-21909
HGL16-SM-M16	16	M16	11.0	29	57	20	12	10 pcs.	Black (BK)	166-21901
HGL16-SM-M20	16	M20	14.5	29	57	24	12	10 pcs.	Black (BK)	166-21902
HGL16-SM-PG9	16	PG9	11.0	29	50	22	10	10 pcs.	Black (BK)	166-21910
HGL16-SM-PG11	16	PG11	11.0	29	52	24	12	10 pcs.	Black (BK)	166-21911
HGL21-SM-M20	21	M20	14.5	32	57	24	12	10 pcs.	Black (BK)	166-21903
HGL21-SM-PG13	21	PG13,5	14.5	32	55	24	10	10 pcs.	Black (BK)	166-21912
HGL21-SM-PG16	21	PG16	14.5	32	58	29	13	10 pcs.	Black (BK)	166-21913
HGL28-SM-M25	28	M25	19.5	44	62	29	12	10 pcs.	Black (BK)	166-21904
HGL28-SM-PG21	28	PG21	19.5	44	64	35	14	10 pcs.	Black (BK)	166-21914
HGL34-SM-M32	34	M32	26.5	51	67	38	13	10 pcs.	Black (BK)	166-21905
HGL34-SM-PG29	34	PG29	26.5	51	68	42	14	10 pcs.	Black (BK)	166-21915
HGL42-SM-M40	42	M40	32.5	63	79	50	15	2 pcs.	Black (BK)	166-21906
HGL54-SM-M50	54	M50	42.0	76	85	58	17	2 pcs.	Black (BK)	166-21907

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.

