



Fittings with swivel external thread

HG-90M 90° Elbow fitting, IP66

90° elbow swivel brass external thread.


Features and benefits

- One piece, fast fit
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus



HelaGuard HG-90M 90° Elbow Swivel External Thread, IP66.

MATERIAL	Polyamide 6.6 (PA66), Nickel Plated Brass (NPB)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

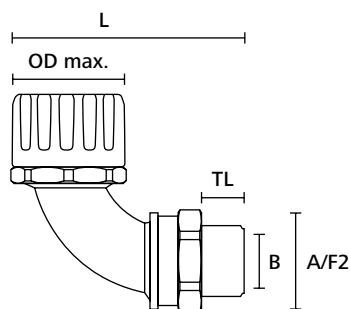

HelaGuard fitting, 90° with swivel external thread

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	A/F Thread (A/F2)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
HG13-90M-M16	13	M16	10.5	24	60	20	12	10 pcs.	Black (BK)	166-22500
HG13-90M-PG9	13	PG9	10.5	24	58	22	10	10 pcs.	Black (BK)	166-22509
HG16-90M-M16	16	M16	10.5	29	62	20	12	10 pcs.	Black (BK)	166-22501
HG16-90M-M20	16	M20	14.0	29	64	24	12	10 pcs.	Black (BK)	166-22502
HG16-90M-PG9	16	PG9	10.5	29	60	22	10	10 pcs.	Black (BK)	166-22510
HG16-90M-PG11	16	PG11	10.5	29	62	24	12	10 pcs.	Black (BK)	166-22511
HG21-90M-M20	21	M20	14.0	32	66	24	12	10 pcs.	Black (BK)	166-22503
HG21-90M-PG13	21	PG13,5	14.0	32	64	24	10	10 pcs.	Black (BK)	166-22512
HG21-90M-PG16	21	PG16	14.0	32	67	29	13	10 pcs.	Black (BK)	166-22513
HG28-90M-M25	28	M25	19.0	44	79	29	12	10 pcs.	Black (BK)	166-22504
HG28-90M-PG21	28	PG21	19.0	44	81	35	14	10 pcs.	Black (BK)	166-22514
HG34-90M-M32	34	M32	24.5	51	88	38	13	10 pcs.	Black (BK)	166-22505
HG34-90M-PG29	34	PG29	24.5	51	89	42	14	10 pcs.	Black (BK)	166-22515
HG42-90M-M40	42	M40	32.5	63	117	50	15	2 pcs.	Black (BK)	166-22506
HG54-90M-M50	54	M50	39.0	76	124	58	17	2 pcs.	Black (BK)	166-22507

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.



Please note! Not all products listed on this page may have this approval. Please check our website for latest approvals.

