



Fittings with swivel internal thread

HG-SF Straight fitting, IP66

Straight swivel brass internal thread.


Features and benefits

- One piece, fast fit
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus



HeliaGuard HG-SF Straight Swivel Internal Thread, IP66.

MATERIAL	Polyamide 6.6 (PA66), Nickel Plated Brass (NPB)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

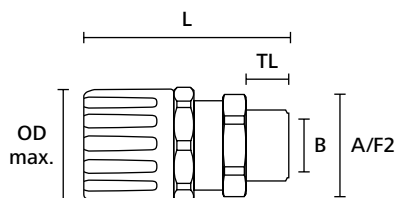

HeliaGuard fitting, straight with swivel internal thread

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	A/F Thread (A/F2)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
HG13-SF-M16	13	M16	11.0	24	66	22	14	10 pcs.	Black (BK)	166-21400
HG13-SF-PG9	13	PG9	11.0	24	66	22	14	10 pcs.	Black (BK)	166-21408
HG16-SF-M16	16	M16	11.0	29	69	22	14	10 pcs.	Black (BK)	166-21401
HG16-SF-M20	16	M20	14.5	29	69	24	14	10 pcs.	Black (BK)	166-21402
HG16-SF-PG11	16	PG11	11.0	29	70	22	14	10 pcs.	Black (BK)	166-21409
HG16-SF-PG16	16	PG16	14.5	29	71	24	14	10 pcs.	Black (BK)	166-21410
HG21-SF-M20	21	M20	14.5	32	71	24	14	10 pcs.	Black (BK)	166-21403
HG21-SF-PG16	21	PG16	14.5	32	71	24	14	10 pcs.	Black (BK)	166-21411
HG28-SF-M25	28	M25	19.5	44	78	30	14	10 pcs.	Black (BK)	166-21404
HG28-SF-PG21	28	PG21	19.5	44	78	29	14	10 pcs.	Black (BK)	166-21412
HG34-SF-M32	34	M32	26.5	51	82	38	14	10 pcs.	Black (BK)	166-21405
HG34-SF-PG29	34	PG29	26.5	51	82	38	14	10 pcs.	Black (BK)	166-21413
HG42-SF-M40	42	M40	32.5	63	106	52	14	2 pcs.	Black (BK)	166-21406
HG54-SF-M50	54	M50	42.0	76	110	52	14	2 pcs.	Black (BK)	166-21407

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.

