

Fittings with swivel internal thread

HGL-SF Straight fitting, IP68

Straight swivel brass internal thread with conduit seal and washer.

Fulfils IP66, IP67, IP68 and IP69k.

Features and benefits

- One piece, fast fit
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus




HelaGuard HGL-SF Straight Swivel Internal Thread, IP68.

MATERIAL	Polyamide 6.6 (PA66), Nickel Plated Brass (NPB), Thermoplastic Elastomer (TPE)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

HF ✓

RoHS ✓

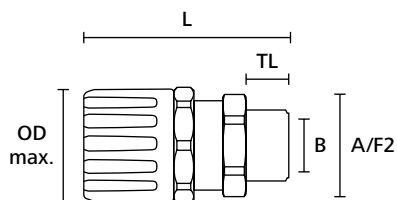

HelaGuard fitting, straight with swivel internal thread

TYPE	Nominal Ø	Thread Size	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	A/F Thread (A/F2)	Thread Length (TL)	Pack Cont.	Colour	Article-No.
HGL13-SF-M16	13	M16	11.0	24	52	22	14	10 pcs.	Black (BK)	166-22000
HGL13-SF-PG9	13	PG9	11.0	24	52	22	14	10 pcs.	Black (BK)	166-22009
HGL16-SF-M16	16	M16	11.0	29	55	22	14	10 pcs.	Black (BK)	166-22001
HGL16-SF-M20	16	M20	14.5	29	55	24	14	10 pcs.	Black (BK)	166-22002
HGL16-SF-PG11	16	PG11	11.0	29	56	22	14	10 pcs.	Black (BK)	166-22011
HGL16-SF-PG16	16	PG16	14.5	29	57	24	14	10 pcs.	Black (BK)	166-22012
HGL21-SF-M20	21	M20	14.5	32	57	24	14	10 pcs.	Black (BK)	166-22003
HGL21-SF-PG16	21	PG16	14.5	32	57	24	14	10 pcs.	Black (BK)	166-22013
HGL28-SF-M25	28	M25	19.5	44	64	30	14	10 pcs.	Black (BK)	166-22004
HGL28-SF-PG21	28	PG21	19.5	44	64	29	14	10 pcs.	Black (BK)	166-22014
HGL34-SF-M32	34	M32	26.5	51	68	38	14	10 pcs.	Black (BK)	166-22005
HGL34-SF-PG29	34	PG29	26.5	51	68	38	14	10 pcs.	Black (BK)	166-22015
HGL42-SF-M40	42	M40	32.5	63	92	52	14	2 pcs.	Black (BK)	166-22006
HGL54-SF-M50	54	M50	42.0	76	96	52	14	2 pcs.	Black (BK)	166-22007

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.

