



Fittings with swivel flange

HGL-90FL 90° Elbow fitting, IP68

90° elbow swivel flange with conduit seal and washer.

Fulfils IP66, IP67, IP68 and IP69k.

Features and benefits

- One piece, fast fit
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus




HelaGuard HGL-90FL 90° Elbow Swivel Flange, IP68.

MATERIAL	Polyamide 6.6 (PA66), Thermoplastic Elastomer (TPE)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

HF ✓

RoHS ✓

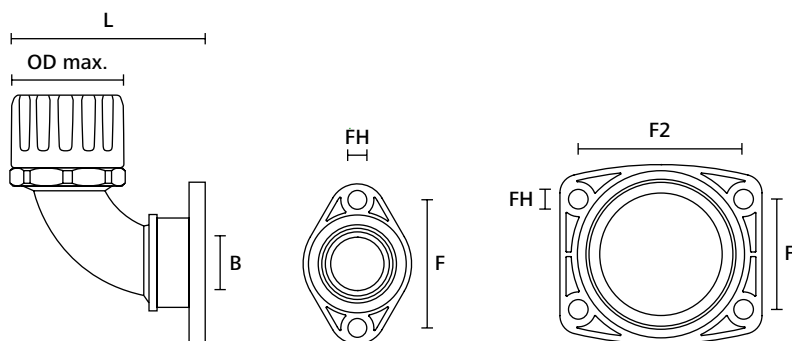

HelaGuard fitting, 90° swivel flange

TYPE	Nominal Ø	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	Hole Ø (FH)	Fixing Hole Centres (F)	Fixing Hole Centres (F2)	Pack Cont.	Colour	Article-No.
HGL16-90FL	16	14.0	29	51	5.2	36	-	10 pcs.	Black (BK)	166-23000
HGL21-90FL	21	14.0	34	53	5.2	36	-	10 pcs.	Black (BK)	166-23001
HGL28-90FL	28	19.0	44	66	6.2	53	-	10 pcs.	Black (BK)	166-23002
HGL34-90FL	34	24.5	51	79	6.2	36	54	10 pcs.	Black (BK)	166-23003
HGL42-90FL	42	39.0	63	100	6.2	36	54	2 pcs.	Black (BK)	166-23004

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.

