

Fittings with swivel flange

HGL-45FL 45° Elbow fitting, IP68

45° elbow swivel flange with conduit seal and washer.

Fulfils IP66, IP67, IP68 and IP69k.

Features and benefits

- One piece, fast fit
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus




HelaGuard HGL-45FL 45° Elbow Swivel Flange, IP68.

MATERIAL	Polyamide 6.6 (PA66), Thermoplastic Elastomer (TPE)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

HF ✓

RoHS ✓

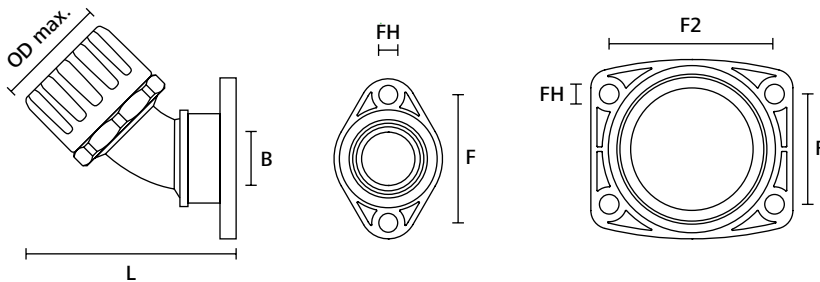

HelaGuard fitting, 45° swivel flange

TYPE	Nominal Ø	Min. Bore Size (B)	Outside Ø max (OD max.)	Length (L)	Hole Ø (FH)	Fixing Hole Centres (F)	Fixing Hole Centres (F2)	Pack Cont.	Colour	Article-No.
HGL16-45FL	16	14.0	29	56	5.2	36	-	10 pcs.	Black (BK)	166-24200
HGL21-45FL	21	14.0	34	63	5.2	36	-	10 pcs.	Black (BK)	166-24201
HGL28-45FL	28	19.0	44	77	6.2	53	-	10 pcs.	Black (BK)	166-24202
HGL34-45FL	34	24.5	51	84	6.2	36	54	10 pcs.	Black (BK)	166-24203
HGL42-45FL	42	39.0	63	98	6.2	36	54	2 pcs.	Black (BK)	166-24204

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.

