



Connectors, reducers and couplers

HG-T T-Connector, IP66


Features and benefits

- Fast fit T-shaped connector
- Includes removable inspection lid
- High pull-off strength
- Highly resistant to solvents and oils
- Free of halogen, sulphur and phosphorus



HeliaGuard HG-T, T-Connector, IP66.

MATERIAL	Polyamide 6.6 (PA66)
Operating Temperature	-50 °C to +135 °C
Flammability	UL 94 V2

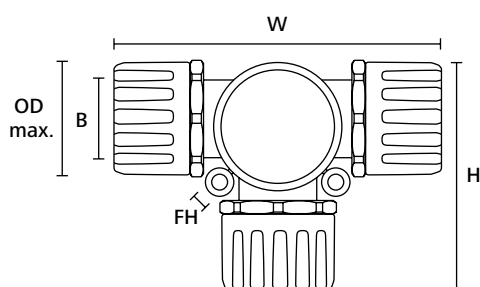

HeliaGuard fitting, T-connector

TYPE	From nominal diameter	To nominal diameter	Min. Bore Size (B)	Outside Ø max (OD max.)	Width (W)	Height (H)	Hole Ø (FH)	Pack Cont.	Colour	Article-No.
HG16-T	16	16	14.0	33	96	62	6.2	5 pcs.	Black (BK)	166-24800
HG20-T	20	20	19.0	34	99	63	6.2	3 pcs.	Black (BK)	166-24801
HG21-T	21	21	19.0	34	99	63	6.2	3 pcs.	Black (BK)	166-24802
HG28-T	28	28	25.0	45	125	87	6.0	3 pcs.	Black (BK)	166-24803
HG34-T	34	34	33.0	48	130	91	7.2	2 pcs.	Black (BK)	166-24804
HG42-T	42	42	41.0	55	150	110	7.2	1 pc.	Black (BK)	166-24805

All dimensions in mm. Subject to technical changes.

Colour grey available on request. Minimum Order Quantity (MOQ) may differ from package content.

